



## eCore ActIO 22172 Energy


eCore ActIO 22172 Energy, ESP32 controller

Code: D103000026700

- > Memory: 8 MB | 16 MB
- > Analogue Inputs: 7
- > Módulos: 7
- > Communications: RS232/485 | Ethernet | Wi-Fi
- > N° relays: 3 (6 A)
- > Digital inputs: 2
- > Power supply: 85 ... 264 V~
- > CPU: ESP32 Dual-core 32-bit 240 MHz

### Description

Range of controllers designed for applications with real-time needs and strict cost requirements. ESP32 Technology, FreeRTOS Operating System, Modbus RTU/TCP and MQTT built in.

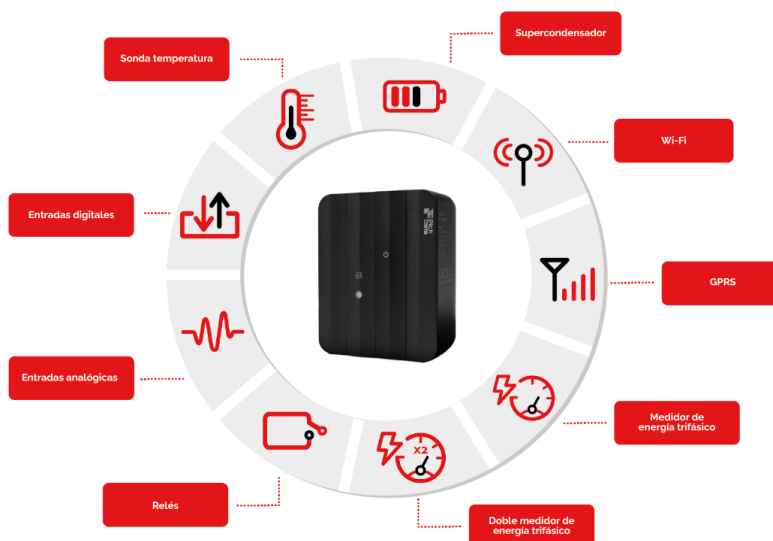



## eCore ActIO 22172 Energy

Code: D103000026700

### Specifications

#### AC power supply

Consumption	8,8 ... 10,5 VA
Frequency	47 ... 63 Hz
Nominal voltage	85 ... 264 V~

#### DC power supply

Consumption	6,4 ... 6,5 W
Nominal voltage	120 ... 300 Vdc

#### Electrical characteristics

Isolation level	3 kVac
-----------------	--------

#### Mechanical characteristics

Size (mm) width x height x depth	140 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V3
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	0,267

#### Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Working temperature	-20...+50 °C

#### Communication Network

Technology / Type	Ethernet 10/100 Mbps
-------------------	----------------------

#### Control Unit

Clock	RTC
CPU	ESP32 Dual-core 32-bit 240 MHz
PSRAM Memory	8 MB
SPI Flash Memory	16 MB

#### Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)
Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

#### Electrical safety

Insulation	3 kVac
------------	--------



## eCore ActIO 22172 Energy

Code: D103000026700

### Analogue inputs

Quantity	7
Nominal range	0...10 V / 0...20 mA o 4...20 mA
Nominal input range	0...10 V / 0...20 mA o 4...20 mA

### Digital inputs

Quantity	2
Type	0...24 Vcc

### Digital relay outputs

Quantity	3
Type	NA
Maximum current	6 A
Maximum open contact voltage	250 Vac

### Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation
-------------------	---------------------------------------------------------------

### Wireless communication

Band	802.11 b/g/n (2.4 GHz.)
Technology / Type	Wi-Fi

### eCore ActIO Energy

ESP32 controller

CODE	TYPE	CPU	Memory	Analogue Inputs	Digital inputs	N° relays	Communications	Power supply
<b>eCore ActIO Energy</b>								
D103000026700	eCore ActIO 22172 Energy	ESP32 Dual-core 32-bit 240 MHz	8 MB   16 MB	7	2	3 (6 A)	RS232/485   Ethernet   Wi-Fi	85 ... 264 V~