



## WI/TS

WI/TS, Current relay

Code: P32010. **CONSULTAR DISPONIBILIDAD**

- > Trip time (adjustable): 0,5 ... 30 s
- > Margin of setting (adjustable): s / transf. .../ 5 A

### Description

The **WI** current detectors are electronic devices with an output relay that is connected or disconnected, in accordance with the level of current detected in the circuit.

- The trip level is adjusted with the potentiometer on the front of the unit.
- The reset process is automatic with currents under 10% of the trip level (Hysteresis).
- Delay: the connection and disconnection times of the output relay can be adjusted separately.
- Measurement of the current, depending on the type:
  - With built-in current transformer (net diameter  $\varnothing$  25 mm)
  - Separate transformer, input.../5 A ~

### Application

**WI**'s can be used in any application that needs to control the load:

- Power supply units for grinders or aggregate grinding units.
- Loads in extrusion machines
- Pump control
- Load on motors, etc.



## WI/TS

Current detector control relay

Code: P32010.

### Specifications

#### AC power supply

Frequency	50 Hz
Nominal voltage	220-240 V~ (-15%, +10%)

#### Mechanical characteristics

Size (mm) width x height x depth	70 x 87 x 75 (mm)
Weight (kg)	0,17

#### Voltage measurement circuit

Insulation voltage	2,5 kV
--------------------	--------

#### Digital relay outputs

AC11 Ie/Ue	0,8 A / 240 V~
DC11 Ie/Ue	1,6 A / 30 Vdc
Thermal current (Ith)	5 A
Insulation voltage	250 V ~
Electrical life	1 x 10 <sup>5</sup>
Mechanical life	2 x 10 <sup>6</sup>

#### Differential protection

Sensitivity (IΔn), A	s / transformador ... / 5A
Delay time (tΔ)	0,5 ... 30 s




# WI/TS

Current detector control relay

Code: P32010.

## Dimensions

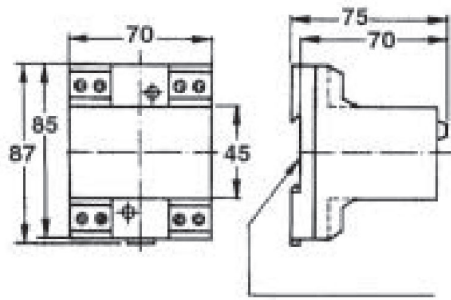

DIN 46277 (EN 50022)  
FIJACIÓN / FIXING

## Connections

