



eManager 2 (DC)

eManager 2 (DC), ARM controller

Code: D20401.

- > Memory: 1 GB | 8 GB eMMC
- > Módulos: 3
- > Communications: RS232/485 | CAN BUS | Ethernet | Wi-Fi
- > Power supply: 9...36 Vdc
- > CPU: ARM Cortex A53 Basic


Description

eManager 2 is a high-performance industrial OEM device designed with an embedded system based on Linux Yocto. Its flexible architecture makes it an ideal solution for automation, industrial IoT, and remote control applications.

The device integrates RS-232 and RS-485 serial communications, CAN FD bus, an Ethernet network interface, and Wi-Fi connectivity. It incorporates a TPM 2.0 security chip, which reinforces data protection and system integrity.

eManager 2 also includes a software suite that facilitates both device configuration and application development. This suite incorporates tools such as Node-RED, ChirpStack, and the TICK and MING stacks.

The device has access to an online package repository, which allows for the easy installation of additional components such as databases, VPN servers, and Docker containers, among others.

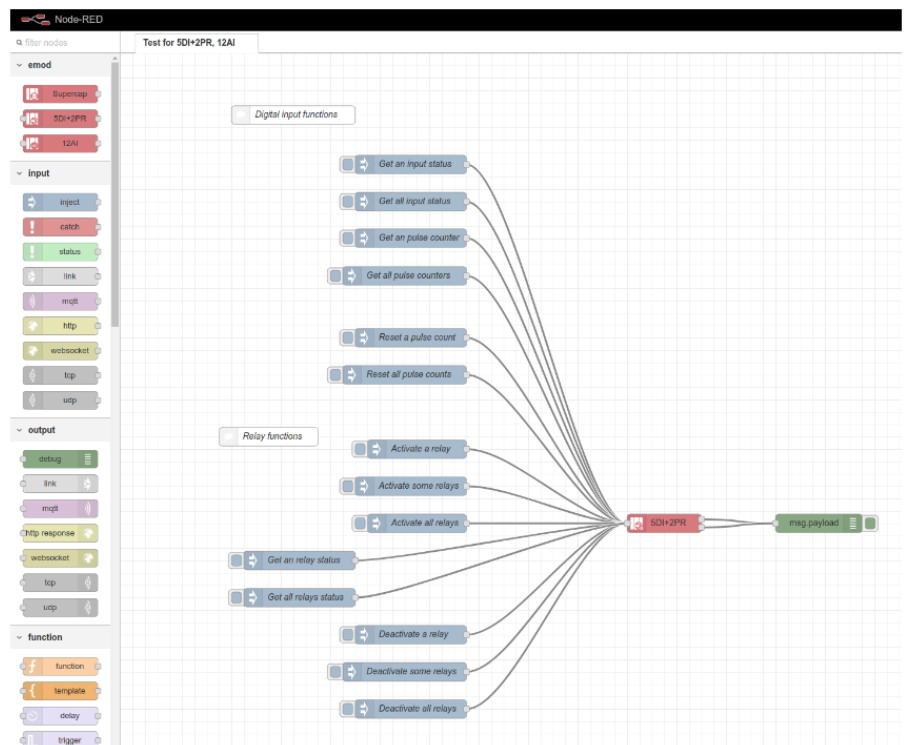



eManager 2 (DC)

2nd generation programmable IoT controllers

Code: D20401.

Specifications

DC power supply

Nominal voltage	9...36 Vdc
-----------------	------------

Mechanical characteristics

Size (mm) width x height x depth	66 x 99.6 x 78.4 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V3
Fastening	DIN rail
Weight (kg)	0,404

Environmental characteristics

Protection class	IP30
Relative humidity (without condensation)	5...95 %

Voltage measurement circuit

Installation category	CAT III 300 V
-----------------------	---------------

Communication Network

Technology / Interface	Ethernet 10/100/1000 Mbps
------------------------	---------------------------

Control Unit

Clock	RTC
CPU	ARM Cortex A53 1.6 GHz
PSRAM Memory	1 GB
SPI Flash Memory	8 GB eMMC

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V

Electrical safety

Insulation	3 kVac
------------	--------

Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex) / CAN-FD (semi-duplex) Galvanic isolation
-------------------	---

Wireless communication

Band	802.11 a/b/g/n/ac (2.4 - 5 GHz.)
Technology / Type	Wi-Fi



eManager 2 (DC)

2nd generation programmable IoT controllers

Code: D20401.

eManager 2 Essential

2nd generation programmable IoT controllers

CODE	TYPE	Power supply	CPU	Communications	Memory	Digital inputs	N° relays	Analogue Inputs	Módulos
eManager 2 Essential									
D20400.	eManager 2	85 ... 264 V~	ARM Cortex A53 Basic	RS232/485 CAN BUS Ethernet Wi-Fi	1 GB 8 GB eMMC	-	-	-	3
D20401.	eManager 2 (DC)	9...36 Vdc	ARM Cortex A53 Basic	RS232/485 CAN BUS Ethernet Wi-Fi	1 GB 8 GB eMMC	-	-	-	3
D20440.	eManager 2 NB-IoT & LTE-M	85 ... 264 V~	ARM Cortex A53 Basic	RS232/485 CAN BUS Ethernet Wi-Fi NB-IoT & LTE-M	1 GB 8 GB eMMC	-	-	-	4
D20450.	eManager 2 4G	85 ... 264 V~	ARM Cortex A53 Basic	RS232/485 CAN BUS Ethernet Wi-Fi 4G	1 GB 8 GB eMMC	-	-	-	4
D30400.	eManager 2 Pro	85 ... 264 V~	ARM Cortex A53 Pro	RS232/485 CAN BUS Ethernet Wi-Fi	4 GB 16 GB eMMC	-	-	-	3
D3040000G0000	eManager 2 Pro Dual Ethernet	85 ... 264 V~	ARM Cortex A53 Pro	RS232/485 CAN BUS Ethernet x2 Wi-Fi	4 GB 16 GB eMMC	-	-	-	4
D30450.	eManager 2 Pro 4G	85 ... 264 V~	ARM Cortex A53 Pro	RS232/485 CAN BUS Ethernet Wi-Fi 4G	4 GB 16 GB eMMC	-	-	-	4
D3045000H0000	eManager 2 Pro 4G LoRaWAN BS	85 ... 264 V~	ARM Cortex A53 Pro	RS232/485 CAN BUS Ethernet Wi-Fi 4G LoRaWAN	4 GB 16 GB eMMC	-	-	-	5



eManager 2 (DC)

2nd generation programmable IoT controllers

Code: D20401.

Dimensions

