

eManager Pro (DC)


eManager Pro (DC), ARM controller

Code: D30001.

> Memory: 512 MB | 8 GB eMMC
> Módules: 5
> Communications: RS232/485 | Ethernet | Wi-Fi
> Power supply: 9...36 Vdc
> CPU: ARM Cortex A7 800 MHz

Description

eManager Essentials is an industrial IoT controller equipped with a high-performance control unit with an embedded Linux Yocto system and fully integrated Node-RED software. It includes RS-232/485, Ethernet and Wi-Fi communications. Two versions are available, **eManager** and **eManager Pro**, expandable with a wide range of expansion modules.

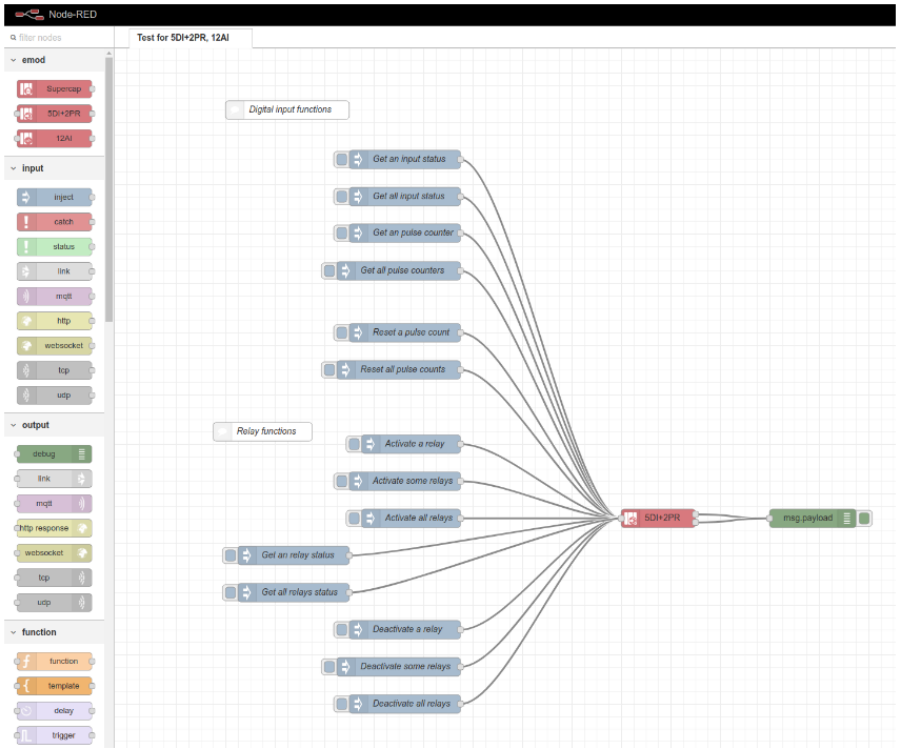



eManager Pro (DC)

Code: D30001.

Specifications

DC power supply

Consumption	0,5 ... 10 W
Nominal voltage	9...36 Vdc

Electrical characteristics

Isolation level	3 kVac

Mechanical characteristics

Size (mm) width x height x depth	88 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V2
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	0,164

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Working temperature	-20...+50 °C

Communication Network

Technology / Interface	Ethernet 10/100 Mbps

Control Unit

Clock	RTC
CPU	ARM Cortex A7 800 MHz
PSRAM Memory	512 MB
SPI Flash Memory	8 GB eMMC

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)
Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

Electrical safety

Insulation	3 kVac

Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation

Wireless communication

Band	802.11 b/g/n (2.4 GHz.)



eManager Pro (DC)

Code: D30001.

Technology / Type	Wi-Fi

eManager Essential
IoT programmable controllers

CODE	TYPE	CPU	Memory	Communications	Power supply
eManager Essential					
D20010.	eManager GPRS	ARM Cortex A7 700 MHz	256 MB | 512 MB NAND	RS232/485 | Ethernet | Wi-Fi | GPRS	85 ... 264 V~
D30000.	eManager Pro	ARM Cortex A7 800 MHz	512 MB | 8 GB eMMC	RS232/485 | Ethernet | Wi-Fi	85 ... 264 V~
D30001.	eManager Pro (DC)	ARM Cortex A7 800 MHz	512 MB | 8 GB eMMC	RS232/485 | Ethernet | Wi-Fi	9...36 Vdc
D30010.	eManager Pro GPRS	ARM Cortex A7 800 MHz	512 MB | 8 GB eMMC	RS232/485 | Ethernet | Wi-Fi | GPRS	85 ... 264 V~
D30020.	eManager Pro 4G	ARM Cortex A7 800 MHz	512 MB | 8 GB eMMC	RS232/485 | Ethernet | Wi-Fi | 4G EMEA	85 ... 264 V~

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.