



eManager Pro 4G (LATAM/AUX)


eManager Pro 4G (LATAM/AUX), ARM controller

Code: D30030.

- > Memory: 512 MB | 8 GB eMMC
- > Módulos: 5
- > Communications: RS232/485 | Ethernet | Wi-Fi | 4G LATAM,AUS,NZ
- > Power supply: 85 ... 264 V~
- > CPU: ARM Cortex A7 800 MHz

Description

eManager Essentials is an industrial IoT controller equipped with a high-performance control unit with an embedded Linux Yocto system and fully integrated Node-RED software. It includes RS-232/485, Ethernet and Wi-Fi communications. Two versions are available, **eManager** and **eManager Pro**, expandable with a wide range of expansion modules.

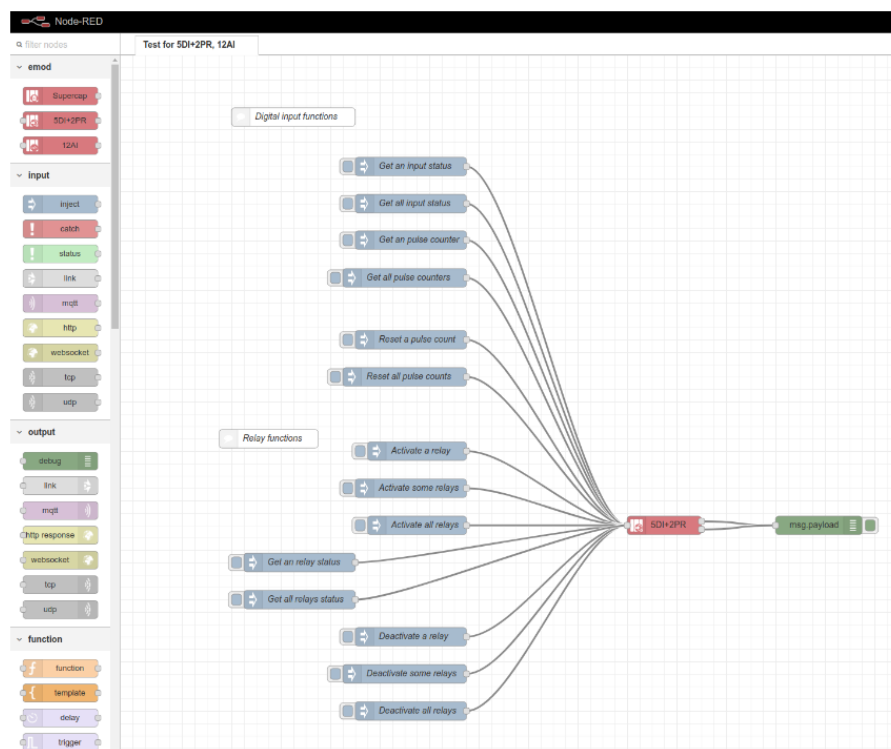



eManager Pro 4G (LATAM/AUX)

Code: D30030.

Specifications

AC power supply

Consumption	8,8 ... 10,5 VA
Frequency	47 ... 63 Hz
Nominal voltage	85 ... 264 V~

DC power supply

Consumption	6,4 ... 6,5 W
Nominal voltage	120 ... 300 Vdc

Electrical characteristics

Isolation level	3 kVac
-----------------	--------

Mechanical characteristics

Size (mm) width x height x depth	88 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V2
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	0,212

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Working temperature	-20...+50 °C

Communication Network

Technology / Type	Ethernet 10/100 Mbps
-------------------	----------------------

Control Unit

Clock	RTC
CPU	ARM Cortex A7 800 MHz
PSRAM Memory	512 MB
SPI Flash Memory	8 GB eMMC

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)
Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

Electrical safety

Insulation	3 kVac
------------	--------



eManager Pro 4G (LATAM/AUX)

Code: D30030.

Radio communication

Band	LTE Cat 1 700MHz/850MHz/900MHz/1700MHz/1800MHz/1900MHz/2100MHz/2600MHz LGA
Technology / Type	4G LATAM

Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation
-------------------	---

Wireless communication

Band	802.11 b/g/n (2.4 GHz.)
Technology / Type	Wi-Fi