

MEG-1000

MEG-1000, Isolation meter

Code: M15051.

> Scale: 90°

> Accuracy: 1,5

> Measure: 0 ... 500 kΩ 0,5 ... 5 MΩ

> Frequency (Hz): 50...60

> Impedance (Ω): 0 ... 500 kΩ, 0,5 ... 5 MΩ

Description

- The MEG-S unit has a backlit LCD display and it is used to take insulation (MΩ), continuity (Ω) and AC voltage readings.
- Press a button for instantaneous operation. In addition, in the case of taking continuous readings of MΩ or Ω, the unit has a builtin timer with automatic disconnection after 3 to 5 minutes to save on the consumption of batteries
- LED indicator (red) to check the insulation and continuity
- Use of the high-performance and accuracy DC-DC converter
- Carrying case
- Specially designed to measure the insulating resistance of domestic electrical appliances, distribution of energy lines and installations.
- Cable for the conductor insulation test.
- Cable for the insulation test against the appliance body.

Application

MEG-1000 measures and controls the insulation resistance between phase and earth in a neutral insulated or impedance line (IT), with the use of relays. The insulation resistance can be displayed with a galvanometric indicator located on the front of the unit. To carry out the measurements, the unit applies a continuous voltage of 24 V between the phase and earth, measuring the leakage current circulating through the network insulation resistors. This current determines the insulation resistance. The unit has two timed output relays, one acts as the maximum (triggered when the insulation resistance is lower than a determined value). In both relays, the trip point and connection delay time can be adjusted with potentiometers located on the back of the unit. When the insulation resistor is within the maximum and minimum values defined with the potentiometers, the NORMAL LED will be lit on the front panel. When the resistor is out of the margins defined, either exceeding or not reaching the normal levels, the ALARM LED will be lit on the front panel.

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



MEG-1000

Insulation resistance meter

Code: M15051.

Specifications

AC power supply

Consumption	2,8 VA
Frequency	50 ... 60 Hz
Nominal voltage	230 Vca ±20 %

Mechanical characteristics

Size (mm) width x height x depth	96 x 96 x 132 (mm)
Fastening	Panel
Weight (kg)	0,689

Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 20 (Terminals)
Working temperature	-20 ... +50 °C

Voltage measurement circuit

Maximum permanent measurement voltage	1000 Vac between Phase-Earth (terminals E and R)

Electrical characteristics

Insulation voltage, circuit	2,5 KV a 50 HZ durante 1 min entre bornes y caja

Standards

Standards	IEC 60255-5, IEC 61010-1, IEC 60801-2, IEC 60801-3, IEC 60801-4

Measurement accuracy

Accuracy	1,5

MEG-1000
Insulation resistance meter

CODE	TYPE	Scale	Accuracy	Measure	Frequency (Hz)
M15051.	MEG-1000	90°	1,5	0 ... 500 kΩ 0,5 ... 5 MΩ	50...60

(*) 440 Vac power supply +10% RRP

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.





MEG-1000

Insulation resistance meter

Code: M15051.


Dimensions

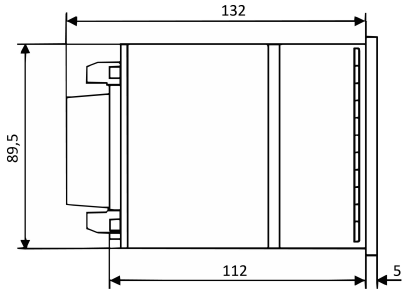

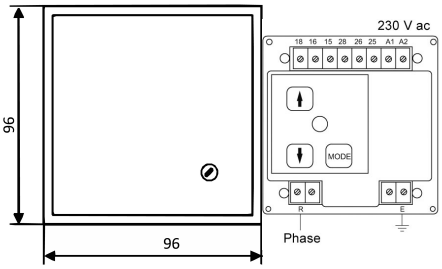


Panel hole 92 mm$^{+0.8}$ x 92 mm$^{+0.8}$

Connections



18, 16, 15: Normal relay
28, 26, 25: ALARM relay



Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.