

CVE-A-AP

CVE-A-AP, Transducer Vac.

Code: M25021. **DESCATALOGADO**

> Output type: 1
> Analog output: 0...20mA
> Measure: 230 Vac
> Paramètre: V ~

Description

The **CVE-A** and **CVE-AP** transducers, convert A.C voltage to D.C process indicator signal.

The analog output is directly proportional to the input signal, calibrated as a RMS with sinus signal of 50Hz.

Creation date: 20/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



CVE-A-AP

Narrow section AC Voltage transducer

Code: M25021.

Specifications

AC power supply

Nominal voltage	0...5, 10 Vcc

Mechanical characteristics

Size (mm) width x height x depth	20 x 70 x 110 (mm)
Weight (kg)	0,054

Environmental characteristics

Protection class	IP 20 (Terminals) IP 40 (case)
Storage temperature	-40....+70 °C
Working temperature	-10...+60 °C

Voltage measurement circuit

Consumption	2,5 VA
Frequency measuring range	45/65 Hz
Voltage measuring range	70...110 % Vn
Nominal voltage	0...660 V
Maximum permanent measurement voltage	120 % Vn

Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 529, IEC 688, IEC 801, EN 50081-1, EN 50082-1, IEC 1010

Analogue inputs

Load impedance in current	< 500 Ω
Ripple (effective RMS value)	< 2 %
Load impedance in voltage	> 500 Ω
Response time	< 300 ms (0...99 % Vn)

Analogue outputs

Current mode, nominal range	0...10, 20 mAac
Voltage mode: nominal output range	0...5, 10 Vac

Measurement accuracy

Phase current measurement	0,5 % FS

CVE
Narrow section AC Voltage transducer



CVE-A-AP

Narrow section AC Voltage transducer

Code: M25021.

CODE	TYPE	Output type	Analog output	System	Measure	Paramètre
AC Voltage transducer						
M25011.	CVE-A	2	4...20mA	-	300 Vac	V ~

Specify ACCORDING TO THE CODE TABLE: 1. Code / 2. Input range / 3. Output range / 4. Auxiliary power supply / 5. Specify the network voltage for CFE-AP. xxx-AP types external auxiliary supply not required. 4...20 mA output not possible.

For other values, see coding table on following pages

Creation date: 20/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.




CVE-A-AP


Narrow section AC Voltage transducer

Code: M25021.

Dimensions

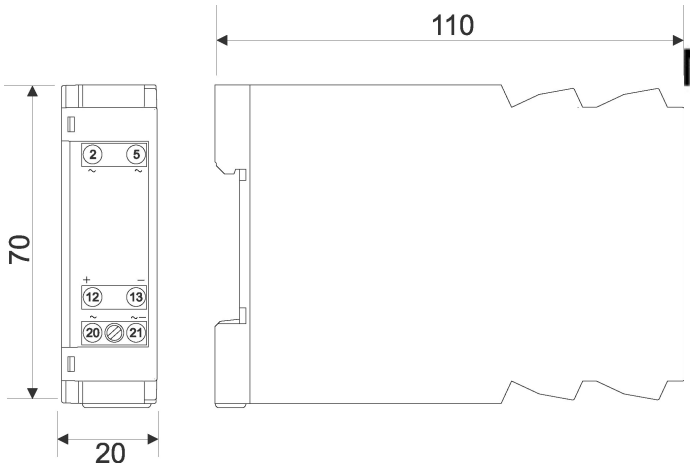

Connections

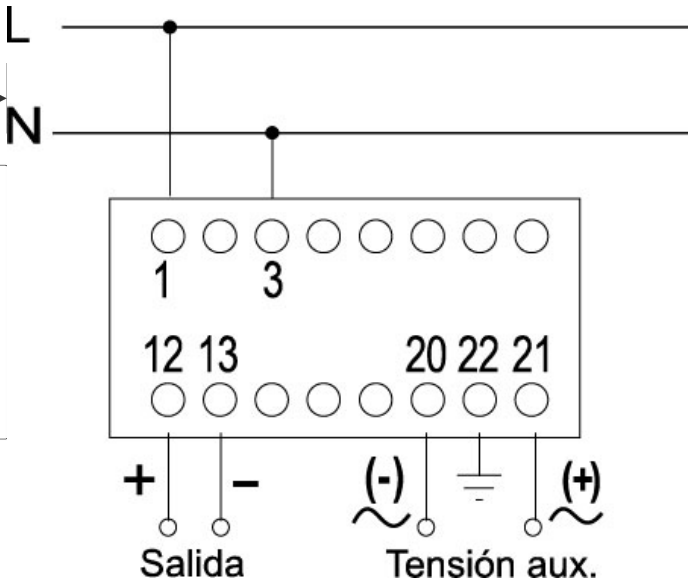

Creation date: 20/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.