



## CW-TAN Out2

---

CW-TAN Out2, Convertidor kW

Code: M25242. DESCATALOGADO

- > Output type: 2
- > Analog output: 4...20mA
- > System: Unbalanced three-phase (4 wires)
- > Paramètre: kW

### Description

---

The **CW** transducers, convert the signal measured to D.C. signal process.

The analog output is directly proportional to active power - single phase measurement. The measurement is in true RMS.



## CW-TAN Out2

Active power transducer

Code: M25242.

### Specifications

#### AC power supply, insulation

Pulse test (kV)	4 kV (1,2/50 $\mu$ s)
Test voltage (kV)	3 kV RMS 50 Hz 1min

#### AC power supply

Consumption	3 VA
Frequency	40...90 Hz
Nominal voltage	24/115/230/400 Vca (-15...+20 %)

#### Mechanical characteristics

Size (mm) width x height x depth	95 x 72 x 110 (mm)
Weight (kg)	0,54

#### Environmental characteristics

Protection class	IP 20 (Terminals) IP 40 (case)
Storage temperature	-40...+70 °C
Working temperature	-10...+55 °C

#### Current measurement circuit

Consumption	0,2 VA
Nominal current (In)	1 A / 5 A
Phase current measurement	0...150 % In
Allowable overload	300 % In permanent

#### Voltage measurement circuit

Input impedance	3000 $\Omega$ /V
Frequency measuring range	45...65 Hz
Voltage measuring range	0...150 % Vn
Nominal voltage	0...660 Vca
Maximum permanent measurement voltage	1000 V

#### Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 529, IEC 688, IEC 801, EN 50081-2, EN 50082-2, IEC 1010

#### Analogue inputs

Load impedance in current	< 500 $\Omega$
Ripple (effective RMS value)	< 0,5 %
Load impedance in voltage	> 500 $\Omega$



## CW-TAN Out2

Active power transducer

Code: M25242.

Response time < 300 ms (0...99 % Vn)

### Analogue outputs

Current mode, nominal range	0...10, 20 mAca
Displaced output	0,2...2 V / 2...10 V / 4...20 mA
Voltage mode: nominal output range	0...5, 10 Vac

### Measurement accuracy

Phase current measurement	0,5 % FS
---------------------------	----------

### CW

Active power transducer

CODE	TYPE	Output type	Analog output	System	Paramètre
<b>Active power. Auxiliary supply 230 V, 40...90 Hz, Accuracy: ± 0,5 % reading</b>					
M25212.	CW-M Out2	2	4...20mA	Single-phase	kW
M25232.	CW-TA Out2	2	4...20mA	Unbalanced three-phase ARON (3 wires)	kW

Indicate: Zero value, fullscale, type of output, Un (between phases), In and fn.

**For other values, see coding table on following pages**




# CW-TAN Out2


Active power transducer

Code: M25242.

## Dimensions

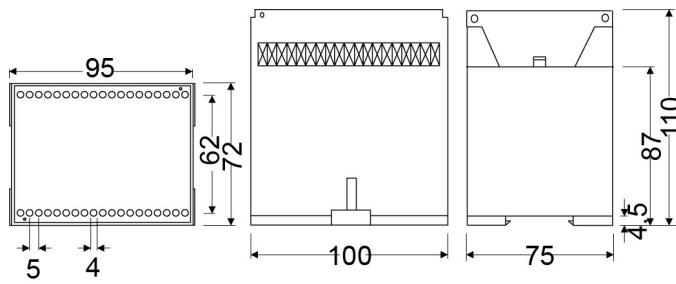

## Connections

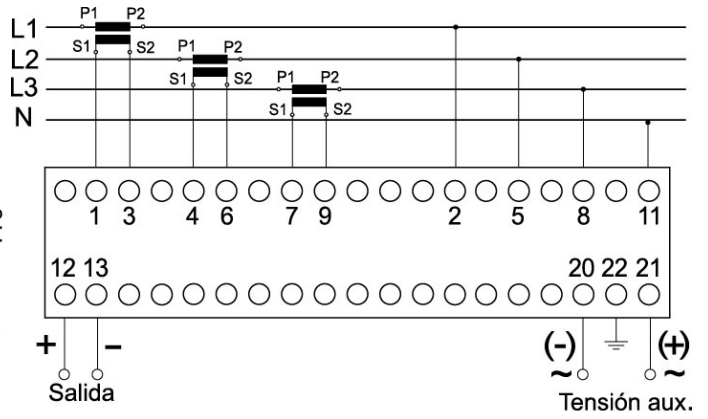

CW-TAN