



CY-TE Sal.1,3, Transducer kvar

Code: M25261. DESCATALOGADO

> Output type: 1, 3

> Analog output: 0...20mA

> System: Balanced three-phase

> Paramètre: kvar

### Description

The CY transducers, convert the signal measured to D.C. signal process.

The analog output is directly proportional to reactive power - single phase measurement. The measurement is in true RMS.







Reactive power transducer

Code: M25261.

### **Specifications**

Pulse test (kV)	4 kV (1,2/50μs)			
Test voltage (kV)	3 kV RMS 50 Hz 1min			
AC power supply				
Consumption	3 VA			
Frequency	4090 Hz	4090 Hz		
Nominal voltage	24/115/230/400 Vca (-15+20 %)	24/115/230/400 Vca (-15+20 %)		
OC power supply, insulation				
Pulse test (kV)	3 kV (1,2/50µs)			
Test voltage (kV)	2 kV RMS 50Hz 1 min			
DC power supply				
Consumption	3 VA	3 VA		
Nominal voltage	9-18 / 18-36 Vdc 36-72 / 90-140 Vdc	9-18 / 18-36 Vdc 36-72 / 90-140 Vdc		
Mechanical characteristics				
Size (mm) width x height x depth	95 x 72 x 110 (mm)	95 x 72 x 110 (mm)		
Weight (kg)	0,54			
invironmental characteristics				
Protection class	IP 20 (Terminals) IP 40 (case)			
Storage temperature	-40+70 °C	-40+70 °C		
Working temperature	-10+55 °C			
urrent measurement circuit				
Consumption	0,2 VA			
Nominal current (In)	1 A / 5 A	1 A / 5 A		
Phase current measurement	0150 % In	0150 % In		
Allowable overload	300 % In permanent	300 % In permanent		
oltage measurement circuit				
Input impedance	3000 Ω/V	3000 Ω/V		
Frequency measuring range	4565 Hz	4565 Hz		
Voltage measuring range	0150 % Vn	0150 % Vn		
		0660 Vca		
Nominal voltage	0660 Vca			







Reactive power transducer

Code: M25261.

#### Standards

Electrical safety, Maximum height (m)	2000		
Standards	IEC 529, IEC 688, IEC 801, EN 50081-2, EN 50082-2, IEC 1010		
Analogue inputs			
Load impedance in current	< 500 Ω		
Ripple (effective RMS value)	< 0,5 %		
Load impedance in voltage	> 500 Ω		
Response time	< 300 ms (099 % Vn)		
Analogue outputs			
Current mode, nominal range	010, 20 mAca		
Displaced output	0,22 V / 210 V / 420 mA		
Voltage mode: nominal output range	05, 10 Vac		
Measurement accuracy			
Phase current measurement	0,5 % FS		

Reactive power transducer

CODE	TYPE	Output type	Analog output	System	Paramètre
Reactive power	er. Auxiliary supply 230 v	V, 4090 Hz, Accuracy: :	± 0,5 % reading		
M25252.	CY-M Out2	2	420mA	Single-phase	kvar

Indicate: Zero value, fullscale, type of output, Un (between phases), In and Fn. For other values, see coding table on following pages








Reactive power transducer

Code: M25261.

#### Dimensions

### Connections

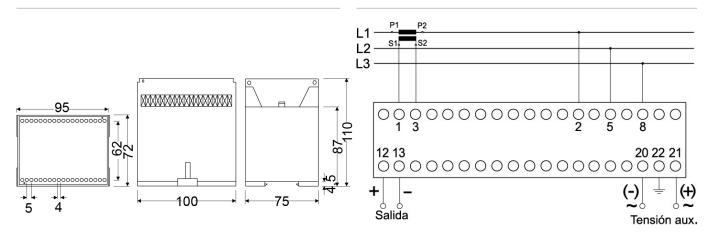

CY-TE

