



Bridge LR PSDC

Bridge LR PSDC, LoRa to RS-485 converter with DC power supply,
Code: D80111.

Specifications

DC power supply

Installation category	CAT III 300 V
Consumption	1 W
Nominal voltage	9 ... 36 Vdc

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5 ... 95 %
Working temperature	-10 ... +60 °C

Mechanical characteristics

Envelope	Plastic UL 94 - V0 self-extinguishing
Fastening	DIN rail
Weight (kg)	0,08

Communication Network

Protocol	Modbus RTU LoRa™ Private (P2P)
----------	--------------------------------

Standards

Electrical safety, Maximum height (m)	2000
Standards	EN 61010-1, EN 61000-6-2, EN 61000-6-4

Electrical safety

Insulation	Double-insulated electric shock protection class II (IEC 61010-1)
------------	---

User interface

LED	3 LED
-----	-------

Radio communication -Antenna

	Tilttable omnidirectional SMA antenna
--	---------------------------------------

Radio communication

Band	Banda ISM de 868 Mhz (9 canales)
------	----------------------------------

Serial communication


Technology / Type	RS-485
-------------------	--------



Bridge LR PSDC

Code: D80111.

Dimensions

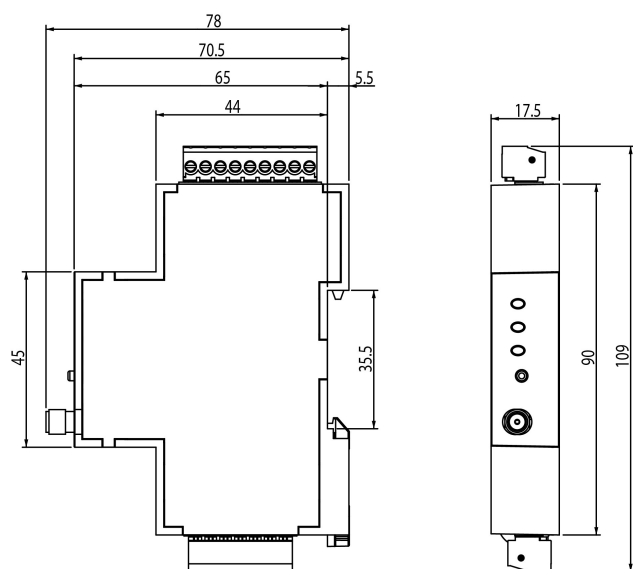

Connections

