



## Line-CVM-D32

Line-CVM-D32, Power analyzer

Code: M58100.

- > Protocol: Modbus/RTU
- > Communications: RS-485 | Bus-Line
- > Transistor output: 2
- > Measuring current Channels: 3
- > Harmonics: 40
- > Input current: .../5 A | .../1 A | .../250 mA
- > Mounting: DIN rail

### Description

The Line-CVM-D32 is a power analyser that measures, calculates and displays the main electrical parameters in single-phase networks, in systems with two phases without ground, with ARON connections or balanced or unbalanced three-phase systems. The measurement is a true RMS that relies on 3 AC voltage inputs and 3 current inputs. The device is modular and scalar thanks to expansion modules with different functionalities. The current is measured indirectly using /5A, /1A or /250mA transformers. The voltage is measured directly in networks of up to 300V ~ P-N or through voltage transformers. Supply quality events counter (Overvoltages, gaps and interruptions)

### Application

- Measurement of electrical parameters in switchboards and low- and medium-voltage connections where space constraints require installing a space-saving analyser in the DIN rail.
- Measurement of instantaneous, maximum and minimum values of electrical parameters.
- Logging of consumed or generated Active or Reactive Energy.
- Pricing of electricity in up to 4 tariffs (via communications or expansion module inputs)
- Generation of impulses through outputs to a transistor, fully and independently configurable based on any incremental parameter of active or reactive energy, either per total counter or per tariff.
- The installation can be controlled by way of programmable timer on delay, timer off delay and interlock alarms.
- Ability to expand the analyser's features by using expansion modules with transistor, relay or analogue inputs/outputs.
- Convert any instantaneous parameter measured or calculated by the device into analogue signals by incorporating analogue output expansion modules.
- Track the status of components in the installation by using the status of the inputs to the expansion module.



## Line-CVM-D32

DIN rail power analyser with quality event counter

Code: M58100.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	3 ... 8 VA
Frequency	50 ... 60 Hz
Nominal voltage	80 ... 264 V ~

#### DC power supply

Installation category	CAT III 300 V
Consumption	2 ... 3 W
Nominal voltage	100 ... 300 Vdc

#### Mechanical characteristics

Size (mm) width x height x depth	52.5 x 118 x 70 (mm)
Envelope	Self-extinguishing VO plastic
Fastening	DIN rail (IEC 60715)
Weight (kg)	0,228

#### Environmental characteristics

Protection class	IP30, Front: IP40
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20 ... +70 °C
Working temperature	-10 ... +50 °C

#### Standards

Certifications	UL 61010-1
Electrical safety, Maximum height (m)	2000
Standards	UNE-EN 61010-1, UNE-EN 61010-2-30, UNE-EN 61326-1

#### Current measurement circuit

Installation category	CAT III 300 V
Nominal current (In)	.../5 A, .../1 A, .../0.250A (transformers type MC)
Phase current measuring range	(In: .../5 A): 0.01 ... 10 A (In: .../1 A): 0.01 ... 2 A (In: .../0.250 A): 0.01 ... 0.5 A
Maximum input current consumption	0.9 VA
Maximum pulse current	100 A (< 1s)
Minimum current measurement	0.01 A

#### Voltage measurement circuit

Installation category	CAT III 300 V
Input impedance	1 MΩ



## Line-CVM-D32

DIN rail power analyser with quality event counter

Code: M58100.

Voltage measuring range	20...300 V~
Nominal voltage	300 V Ph-N / 520 V Ph-Ph
Minimum measurement voltage (Vstart)	10 V ac

### User interface

LED	2 LED
Keyboard	3 keys
Display type	TFT RGB 1.77" 160x128 pixel

### Digital transistor outputs

Pulse width	1 ms
Quantity	2
Type	Optocoupler NO
Maximum frequency	500 Hz
Maximum current	120 mA
Maximum voltage	48 Vcc

### Measurement accuracy

Frequency measurement	.../5A (Class 0.1 % for three-phase and phase values), Class 0.1 % ( .../1A, .../0.250A)
Phase current measurement	.../5A, .../1A (class 0.2 % for three-phase and phase values), ... / 0.250 A (class 1 % for $I \geq 20\% I_n$ , for three-phase and phase values)
Reactive energy measurement (kvarh)	Class 1 (.../5A), Class 2 (.../1A, .../0.250A)
Reactive power measurement (kvar)	.../5A (class 1 % for three-phase and phase values), .../1A (class 1 %), .../0.250A (class 2 %)
Apparent power measurement (kVA)	.../5A (Class 0.5 % for three-phase and phase values), .../1A (Class 1 % for $I \geq 5\% I_n$ ), ... / 0.250 A (Class 1 % for $I \geq 20\% I_n$ )
Active energy measurement (kWh)	Class 0.5S (.../5A), Class 1 (.../1A), Class 1 (.../0.250A)
Active power measurement (kW)	.../5A (Class 0.5 % for three-phase and phase values), .../1A (Class 1 % for $I \geq 5\% I_n$ ), ... / 0.250 A (Class 1 % for $I \geq 20\% I_n$ )
Power factor measurement	.../5A (class 0.5 % for three-phase and phase values), class 0.5 % ( .../1A, .../0.250A)
Phase voltage measurement	.../5A, .../1A, .../0.250A (Class 0.2 % for three-phase and phase values)

### Serial communication

Technology / Type	RS-485 Bus-Line
-------------------	-----------------

### Line-CVM-D

Power analyzer, Line series

CODE	TYPE	Input current	Transistor output	Communications	Protocol
M58100.	Line-CVM-D32	.../5 A   .../1 A   .../250 mA	2	RS-485   Bus-Line	Modbus/RTU



## Line-CVM-D32

DIN rail power analyser with quality event counter

Code: M58100.

Bus-Line: RS-485 communications system, with lateral side connector between modules




## Line-CVM-D32

DIN rail power analyser with quality event counter


Code: M58100.

### Dimensions

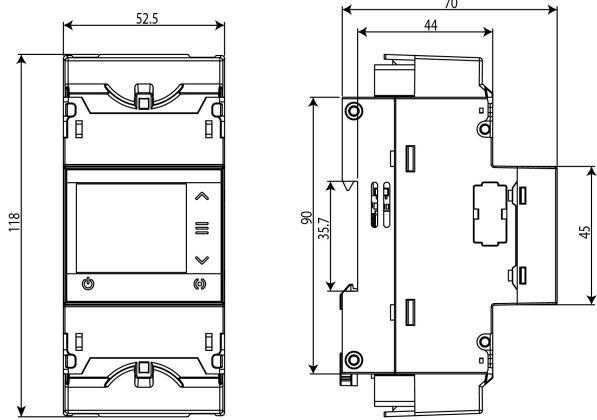

### Connections

4W: 3Ph+N

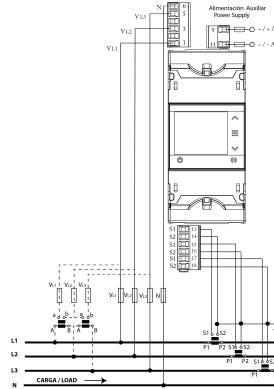

2W: 1Ph+N

