

TP-58 200/5A

TP-58 200/5A, Split core current transformers

Code: M7012B. **CONSULTAR DISPONIBILIDAD**

> Flat strip(mm): 50 x 80
> System: Single-phase
> Class 3 Power (VA): 3
> Measurement Range (A): 200/5
> Input current: 200 A
> Transformer type: Split core

Description

Open-core transformers that can measure current without having to interrupt the electric supply. In other words, the installation does not have to be dismantled in order to install them.

- Range: 100 to 5000 A
- Busbar dimensions: 20 x 30 mm to 80 x 160 mm
- The transformer certificate is attached.

Application

Converting a high nominal current to a lower current so that it can be measured by the unit. They have a split core and can be installed with no need to interrupt the installation's power supply.



TP-58 200/5A

Split-core measurement current transformer

Code: M7012B.

Specifications

Electrical characteristics

Safety factor (SF)	FS 10
Power	3 VA (Class 3)

Mechanical characteristics

Size (mm) width x height x depth	145 x 114 x 50 (mm)
Weight (kg)	0,769

Environmental characteristics

Thermal Class	Class B (+130 °C)
Working temperature	-5 ... 40 °C

Specific technical characteristics of current sensors

Operating voltage	0,72 kV~ max.

Current measurement circuit

Nominal frequency	50 / 60 Hz
Primary current measurement	200 A
Dynamic current (Idyn)	2,5 Ith
Thermal short-circuit current (Ith)	60 In
Transformation ratio	... / 5 A

Standards

Standards	IEC 44-1, UNE 21 088-1, UL 94, VDE 0414

For other configurations see table of additional features




TP-58 200/5A

Split-core measurement current transformer

Code: M7012B.

Dimensions

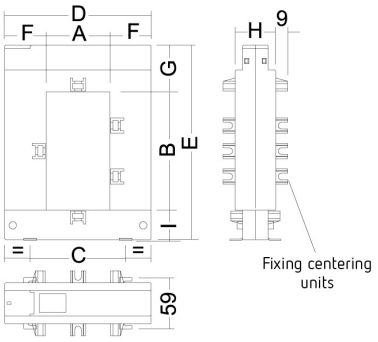

Dimensions (mm)	TP-58	TP-88	TP-812	TP-816
a	50	80	80	80
b	80	80	120	160
c	78	108	108	120
d	114	144	144	184
e	145	145	185	245
f	32	32	32	52
g	32	32	32	47
h	32	32	32	52
i	32	32	32	38

Creation date: 22/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.