



TI-420-105-500A

TI-420-105-500A, Current transformer with converter 4 ... 20 mA

Code: M70832.

- > Inner diameter (mm): 105
- > Analog output: 4...20 mA
- > Measurement Range (A): 500
- > Input current: 500 A
- > Transformer type: Current transformer with 4 ... 20 mA converter

Description

- Needs an output power supply of 10 ... 28 V dc
- Primary current: from 2.5 to 1500 A ~, depending on the type
- Secondary current: 4 ... 20 mA
- Internal diameter: from 35 to 105 mm, depending on the type
- Busbar dimensions: from 35 to 105 mm, depending on the type

Application

Used in power lines to obtain a current proportional to the primary current rated at 4 ... 20 mA in the secondary



TI-420-105-500A

Current transformers with converter

Code: M70832.

Specifications

Auxiliary power supply

| | |
|---------|---------------|
| Voltage | 10 ... 28 Vdc |
|---------|---------------|

Mechanical characteristics

| | |
|----------------------------------|---------------------|
| Size (mm) width x height x depth | 170 x 146 x 33 (mm) |
| Weight (kg) | 0,47 |

Environmental characteristics

| | |
|---------------------|---------------|
| Working temperature | -10°...+50 °C |
|---------------------|---------------|

Specific technical characteristics of current sensors

| | |
|-----------------------|---------------|
| Inner diameter Ø (mm) | 105 |
| Operating voltage | 0,72 kV~ max. |

Current measurement circuit

| | |
|-----------------------------|-------------|
| Nominal frequency | 50 / 60 Hz |
| Primary current measurement | 500 A |
| Permanent overload | 1,5 In |
| Transformation ratio | 4 ... 20 mA |

Standards

| | |
|-----------|----------------------------------------------------------------------------------|
| Standards | IEC 44-1, UNE 21 088-1, IEC 664, VDE0110, VDE0414, UL 94, IEC 1010-1, EN 61010-1 |
|-----------|----------------------------------------------------------------------------------|

Measurement accuracy

| | |
|----------|----------|
| Accuracy | ±1,5% In |
|----------|----------|

TI

Current transformer with converter 4 ... 20 mA

| CODE | TYPE | Measurement Range (A) | Inner diameter (mm) |
|---------------------------------------------|----------------|-----------------------|---------------------|
| 10...28 Vdc supply, Output 4...20 mA | | | |
| M70811. | TI-420-35-2.5A | 2.5 | 35 |
| M70812. | TI-420-35-5A | 5 | 35 |
| M70813. | TI-420-35-10A | 10 | 35 |
| M70814. | TI-420-35-20A | 20 | 35 |
| M70815. | TI-420-35-50A | 50 | 35 |
| M70816. | TI-420-35-100A | 100 | 35 |
| M70817. | TI-420-35-250A | 250 | 35 |



TI-420-105-500A

Current transformers with converter

Code: M70832.

| CODE | TYPE | Measurement Range (A) | Inner diameter (mm) |
|---------|------------------|-----------------------|---------------------|
| M70821. | TI-420-70-100A | 100 | 70 |
| M70822. | TI-420-70-250A | 250 | 70 |
| M70823. | TI-420-70-500A | 500 | 70 |
| M70824. | TI-420-70-750A | 750 | 70 |
| M70831. | TI-420-105-250A | 250 | 105 |
| M70832. | TI-420-105-500A | 500 | 105 |
| M70833. | TI-420-105-750A | 750 | 105 |
| M70834. | TI-420-105-1000A | 1000 | 105 |
| M70835. | TI-420-105-1500A | 1500 | 105 |

For greater currents, use: transformer + transducer




TI-420-105-500A

Current transformers with converter

Code: M70832.

Dimensions

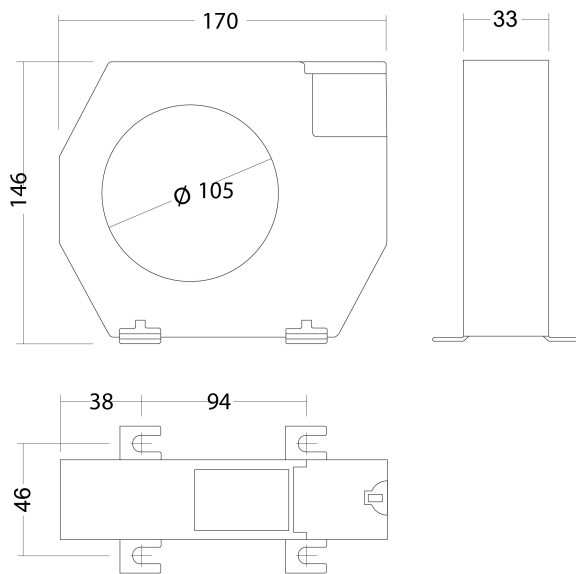

Connections

