



## 212-ES4A-BFB17

212-ES4A-BFB17, Single-phase energy meters with PLC system (measuring, load profiling, multi configurable billing calendar)

Code: QB3C3M11 DESCATALOGADO

- > Type Consumer: 5
- > Discon. relay: Yes
- > Communications: PRIME
- > N° relays: 1
- > Class (Active/Reactive): B (1) / 2
- > System: Single-phase
- > Measure: Direct
- > Measurement Range (V): 230
- > Measurement Range (A): 10 (60)
- > Quadrants: 4
- > Frequency (Hz): 50
- > Hourly discrimination: 2.0A / 2.1A

### Description

**CIRWATT B** is a multi-function digital single-phase meter, Class B in active energy and Class 2 in reactive energy. The meter complies with European legislation related to energy meters (MID) **EN 50470-1** and **EN 50470-3**, which approves the installation of these meters in any country of the European Union. It includes PLC / PRIME (Power Line Carrier) Communications through power cable and an optical communications port. Both use **DLMS** protocol. In addition, it can display information in case of power loss just pressing the button, it can store up to 6 channels of energy registers with 3 months of hourly load profile and it can limit maximum power consumed by end-user, through an internal disconnection relay which can be remotely managed using PLC communications

### Application

The main application of the **CIRWATT B** meter is the metering of active and reactive energy for billing purposes, whenever a meter with high performance features is required at an optimised cost. PLC communications can be used for the remote download of all data recorded by the meter through a **PLC-1000** concentrator or any other PRIME concentrator.

The circuit breaker integrated in the meter can be used to manage the supply remotely, opening/closing the circuit breaker and programming the hired power above a value that will activate the circuit breaker, opening it and reclosing it to guarantee the safety for the final user



## 212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M11

### Specifications

#### AC power supply

Tolerance	80 % ... 115 % Un
Consumption	< 2 W; < 10 VA
Frequency	50 ... 60 Hz
Nominal voltage	110 ... 230 V (80 ... 115 %)

#### Battery specification

Performance-guarantee	> 20 years @ 30 °C
Type	Lithium

#### Mechanical characteristics

Size (mm) width x height x depth	172 x 206 x 67 (mm)
Envelope	DIN 43859
Weight (kg)	0,7

#### Environmental characteristics

Relative humidity (without condensation)	95 % max.
Storage temperature	-40 ... +85 °C
Working temperature	-40 ... +70 °C

#### Voltage measurement circuit

Connection	Asymmetrical
Consumption	< 2 W; 10 VA
Nominal frequency	50 / 60 Hz
Nominal voltage	230 V

#### Current measurement circuit

Consumption	0,024 VA @ 10 A
Reference current (Iref)	10 A
Maximum current	60 A
Minimum current measurement	25 mA

#### Optical communication interface

Hardware	IEC 62056-21
Protocol	DLMS
Type	Serial;bi-directional

#### User interface



## 212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M11

Resolution of the display	up to 6 digits (9 mm)
Display type	LCD
<b>Memory</b>	
Memory capacity	Data: non-volatile memory, Setup and events: serial-flash
Write time	90 days
Type	Serial flash
<b>PLC</b>	
Hardware	CENELEC A
Protocol	DLMS / PRIME
Modulation system	OFDM with repeater system
<b>Measurement accuracy</b>	
Reactive energy measurement (kvarh)	UNE-EN 62053-21 (Class 2)
Active energy measurement (kWh)	EN 50470 (Class B) IEC 62053-21 (Class 1)
<b>Features / performance</b>	
Billing closures	12 locks per contract. Programable date and hour
Load curve	1 load curves, programmable integration time (1 ... 60 min)
Tariff programming	12 days 24 types of data 6 types of tariffs 30 public holidays
<b>Clock</b>	
Source	Temperature compensated oscillator
Accuracy (EN 61038)	< 0,5 s / day
Type	Gregorian calendar




## 212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M11

### Dimensions

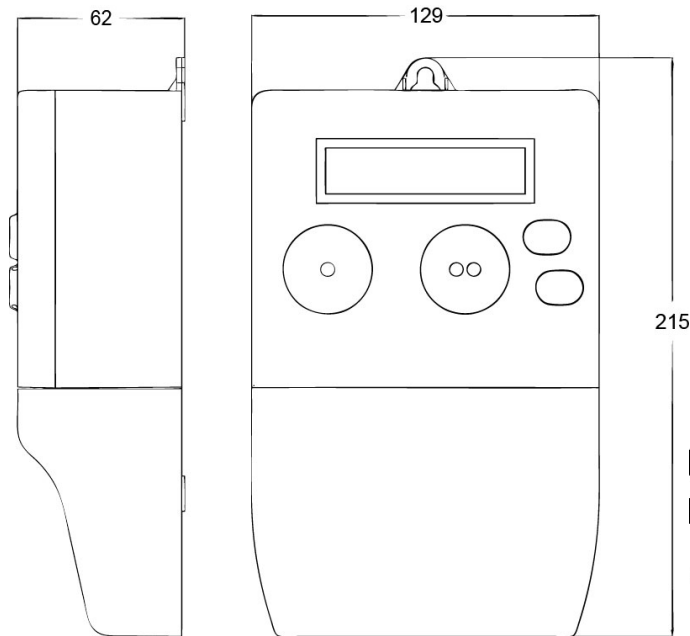

### Connections

