



## computer SMART III Fast 6

computer SMART III Fast 6, Power factor regulator

Code: R13951.

- > Alarm relay: Yes
- > Communications: RS-485
- > Measurement Range (V): 100...520
- > IΔn (A): yes
- > Power supply (Vac): 100...520 Vac
- > Nr steps: 6
- > Input current: .../5A | .../1A
- > Switching unit: EMF / EMB

### Description

Measurement with three current transformers guarantees an analogue reading of the company meter. The **Computer SMART III Fast** reactive energy regulator is the only regulator on the market that offers the possibility of using 3 measurement transformers in addition to the conventional method of measuring with a single current transformer, as well as providing the functions of an integral power analyzer and controlling residual leakage currents.

**Computer SMART III Fast** is a regulator that ensures excellent preventive maintenance by means of programming its alarms and the options for testing the capacitor status, offering maximum supervision and safety of your compensation unit.

### Application

Computer Smart III fast it's the ideal solution to compensate installations with a variation of quick load, between 40 ms and 4 seconds, and/or large unbalances between phases, such as welding units, cranes, lifts and lifting units, smelters, hospitals, automotive industry or any other sector or unit that requires an efficient compensation of the power factor.

The connection of 1 or 3 transformers makes **computer SMART III Fast** the perfect regulator in any installation, allowing the following:

- Changing from 1 to 3 transformers in the following cases:
  - Single-phase fast changing equipment
  - Example: Single-phase welding
  - Replacing the regulator of any capacitor bank
- Perfect for installations with up to 4 objective  $\cos \varphi$ , since it can adapt to any compensation need (different time periods).



## computer SMART III Fast 6

Code: R13951.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	8 ... 14 VA
Frequency	50 ... 60 Hz
Nominal voltage	100 ... 520 V ~

#### Mechanical characteristics

Size (mm) width x height x depth	144 x 144 x 71 (mm)
Envelope	Plastic V0 self-extinguishing
Fastening	Panel
Weight (kg)	0,44

#### Environmental characteristics

Protection class	IP 51 (Front), IP 31 (unmounted)
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20 ... +70 °C
Working temperature	-10 ... +55 °C

#### Current measurement circuit

Installation category	CAT III 300 V
Nominal current (In)	.../5A ó .../1A
Phase current measuring range	1 ... 120 % In
Minimum current measurement	50 mA

#### Voltage measurement circuit

Installation category	CAT III 300 V
Sampling frequency	45 ... 65 Hz
Input impedance	660 kΩ
Voltage measuring range	45 ... 65 Hz
Nominal voltage	230 V Ph-N, 400 V Ph-Ph
Minimum measurement voltage (Vstart)	20 V F-N, 35 V F-F

#### Communications

Fieldbus (ModBus)	RS-485
Parity	without, even, odd
Protocol	Modbus RTU
Type	CPC-NET / RS-485
Speed	RS-485: 9600-19200 / CPC-NET: 9600-19200-38400
Stop bits	1-2



## computer SMART III Fast 6

Code: R13951.

### Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 61010, IEC 61000, IEC 61000-6-2, IEC 61000-6-4, Medidas conforme a : IEC 61557-12

### User interface

LED	4 LED
Keyboard	Capacitive, 5 keys
Display type	LCD Custom COG

### Digital inputs

Input/output insulation	Optoisolated
Quantity	2
Type	Potential-free contact

### Leakage current measurement (ID)

Secondary nominal current	0,003 A
Minimum current measurement (Istart)	10 mA
Measurement range	0,01 ... 1,5 A

### Other digital transistor outputs

Quantity	2
Type	NPN
Maximum current	50 mA
Maximum voltage	24 Vcc

### Digital relay outputs

Quantity	2 (ventilador, alarma)
Maximum current	1A
Maximum open contact voltage	1 kV
Electrical life	30 x 10 <sup>3</sup> ciclos
Mechanical life	5 x 10 <sup>6</sup> Cycles
Maximum switching capacity	2500 VA

### Digital transistor outputs

Quantity	6
Type	Opto MOSFET
Maximum current	150 mA
Maximum voltage	24 Vcc

### Measurement accuracy

Phase current measurement	0.5% ± 1 digit
---------------------------	----------------



## computer SMART III Fast 6

Code: R13951.

Reactive energy measurement (kvarh)	Class 1
Reactive power measurement (kvar)	1% ± 2 digit
Active energy measurement (kWh)	Class 1
Active power measurement (kW)	0.5% ± 2 digits
Phase voltage measurement	0.5% ± 1 digit

### computer SMART III-Fast

Power factor regulators for static switching


CODE	TYPE	Switching unit	Nr steps	Input current
R13953.	computer SMART III F6-12Vdc	EMB-2PH	6	.../5A   .../1A
R13964.	computer SMART III F12-12Vdc	EMB-2PH	12	.../5A   .../1A
R13951.	computer SMART III Fast 6	EMF / EMB	6	.../5A   .../1A
R13962.	computer SMART III Fast 12	EMF / EMB	12	.../5A   .../1A



# computer SMART III Fast 6

Code: R13951.

## Dimensions

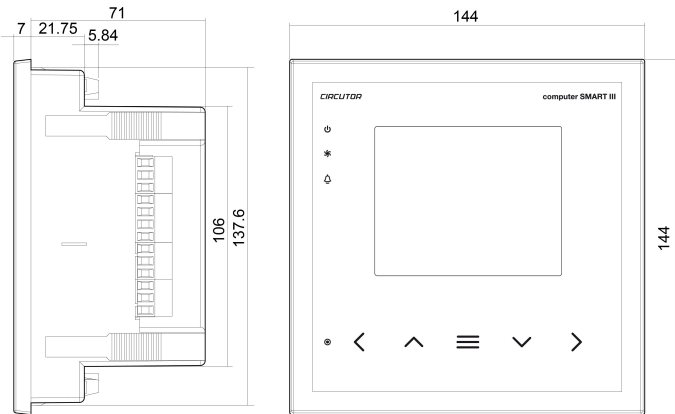

## Connections

