



FB3T-5-6-21

FB3T-5-6-21, Filter

Code: R78121. **DESCATALOGADO**

- > System: Three-phase + Neutral
- > Frequency (Hz): 50
- > Max.neutral current: 6

Description

FB3 filters block 3rd order harmonics and have been designed to reduce these harmonics in installations with distorting singlephase loads.

Application

For single-phase loads, such as PCs, TFT screens, projectors, etc.



FB3T-5-6-21

Third harmonic blocking filter

Code: R78121.

Specifications

AC power supply

Frequency	50 Hz
Nominal voltage	Hasta 750 Vca

Mechanical characteristics

Size (mm) width x height x depth	300 x 200 x 200 (mm)
----------------------------------	----------------------

Environmental characteristics

Protection class	IP 21 (UNE-EN 60529)
Relative humidity (without condensation)	95%
Working temperature	-10 ... +50 °C

Electrical characteristics

Maximum transient current	1,5 (1 min every 10 min)
---------------------------	--------------------------






FB3T-5-6-21

Third harmonic blocking filter

Code: R78121.

Dimensions

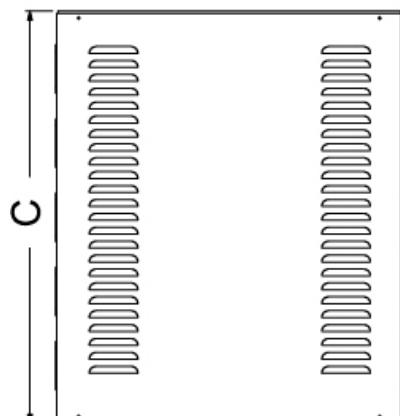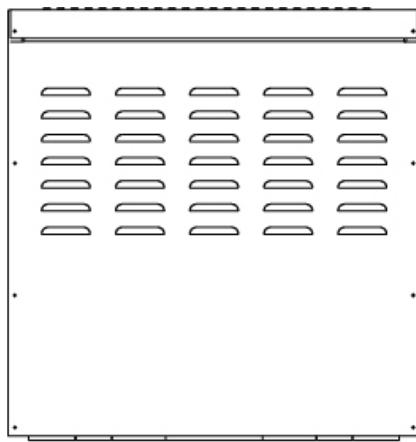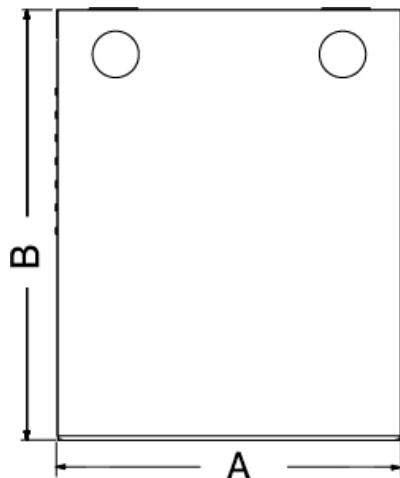

Type	A	B	C
FB3T-16	300	200	200
FB3T-50	370	280	300
FB3T-63	370	480	370
FB3T-100	650	1060	470