



## CEM C10 212 MID

CEM C10 212 MID, Single-phase energy meter with MID certificate

Code: Q21114. DESCATALOGADO

- > Módulos: 2
- > Tariff: 1
- > Certification: MID
- > Transistor output: 1
- > System: Single-phase
- > Measure: Direct
- > Measurement Range (V): 1 x 230
- > Measurement Range (A): 5 (65) A
- > Max. Current (A): 65

### Description

Three-phase electrical energy meter with indirect measurement, 5(10)A (, CEM-C31), direct measurement 65 A (CEM-C21) or single-phase energy meter (CEM-C10).

Built-in LCD display (7 digits) with rotating screen system. It can have integrated RS-485 communications, depending on the model.. Also features

2 buttons (1 sealable button) for viewing all the measured information.

Other features include:

- MID certification, module B+D (depending on the type)
- Class 1 active energy (Class B, in accordance with MID), Class 2 reactive energy
- Complies with the EN 50470 (MID European standards) or IEC 62052-11 standards (international standards), depending on the type.
- Compact size (CEM-C10: 2 modules, 36 mm, CEM-C21 y CEM-C31: 4 modules, 72 mm)
- Resettable partial meter
- 1 programmable impulse output, in accordance with DIN 43864 (CEM-C10, CEM-C31-T1, CEM-C21-T1 models)
- 1 Digital input for Tariff selection and impulse count (CEM-C31-D, CEM-C21-DS)
- Indicates bad connections on the screen
- Energy storage, even in the case of bad connections

### Application

- Redundant meter for verifying the energy allocated by the energy provider.
- Energy consumption report sent to a remote system (PLC/BMS).
- Cost control for achieving a high consumption/unit ratio in industrial processes.
- Display of electrical parameters (V, A, kW, kW-h, PF, etc.), per phase and three-phase.



## CEM C10 212 MID

Energy meter for DIN rail mounting

Code: Q21114.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	< 2 W, 10 VA
Frequency	50 ... 60 Hz
Nominal voltage	230 V ~ ±20 %

#### Mechanical characteristics

Size (mm) width x height x depth	35 x 90 x 61 (mm)
Weight (kg)	0,138

#### Environmental characteristics

Relative humidity (without condensation)	5 ... 95 %
--	------------

#### Current measurement circuit

Consumption	0.3 VA ... 10 A
Reference current (Iref)	5 A
Maximum current	65 A
Minimum current measurement	0.250 A
Transition current	0.500 A

#### Voltage measurement circuit

Nominal frequency	50 ó 60 Hz.
-------------------	-------------

#### Electrical characteristics

Insulation voltage, circuit	4 kV RMS 50 Hz durante 1 min
-----------------------------	------------------------------

#### Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 62053-21, IEC 62053-23, EN 50470-1, EN 50470-3

#### User interface

LED	2 LED: kWh, 1000 imp/kWh, kvarh, 1000 imp/kvarh
Keyboard	2 Keys
Display type	LCD
Maximum value	999999.9 kWh

#### Digital transistor outputs

Quantity	1
Type	Optocoupler



## CEM C10 212 MID

Energy meter for DIN rail mounting

Code: Q21114.

Pulse output, time period (Ton / Toff)	Ton: 200 ms
Maximum current	50 mA
Maximum voltage	24 Vcc

### Measurement accuracy

Reactive energy measurement (kvarh)	Class 2.0 (IEC 62053-23)
Active energy measurement (kWh)	Class B (EN 50470)

### Wireless communication

Technology / Type	Optical IR port (additional external receiver required)
-------------------	---

CEM-C10 and CEM-C21/C31 without built-in RS-485 communications can optionally communicate with CEM-M-ETH and CEM-M-RS485 modules.  
Devices with absolute measurements (Abs). For 2 or 4 quadrants, see the Additional table  
Frequency: 50/60 Hz. Parameters: V, A, kW, kVA, kWh, cos phi

CEM-XXX-TI encoding table - Devices with pulse output (transistor)  
CEM-XXX-DS-Devices with digital input for tariff change and impulse meter




## CEM C10 212 MID

Energy meter for DIN rail mounting

Code: Q21114.

### Dimensions

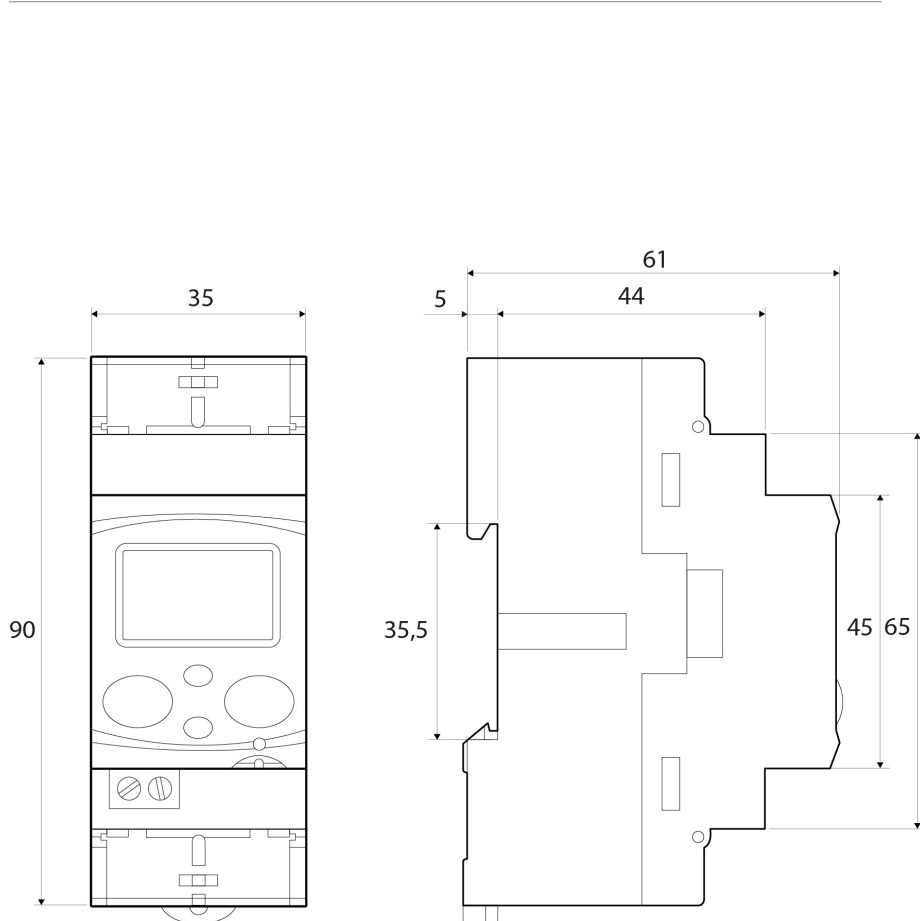

### Connections

