


# EC72 600V

EC72 600V, Voltmeter

Code: M10429.

> Scale: 90°, P1
> Accuracy: 1,5
> Measurement Range (V): 600
> Modules: 72x72

## Description

- No need for auxiliary power supply, only the CEC 96 type
- DIN boxes with dimensions: 48, 72, 96 and 144
- Measurement in true root mean square or V ... 600 V ac
- Exchangeable scales for EC48, EC72, EC96, EM 45
- The alarm system can be fully configured for CEC 96

&nb

## Application

In alternating current applications, to control the state of the voltage quickly and visually.



Creation date: 21/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.




# EC72 600V

Moving Iron Voltmeters

Code: M10429.

## Specifications

### Mechanical characteristics

| | |
|---|---|
| Size (mm) width x height x depth | 72 x 72 x 49.2 (mm) |
| Fastening | Panel |
| Weight (kg) | 0,13 |

### Environmental characteristics

| | |
|---|---|
| Protection class | Panel: IP 52 (Front), IP 20 (Terminals) |
| Storage temperature | -25...+40 °C |
| Working temperature | +10 ... +30 °C |

### Standards

| | |
|---|---|
| Certifications | CE |
| Electrical safety, Maximum height (m) | 2000 |
| Standards | BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318 |

### Voltage measurement circuit

| | |
|---|---|
| Consumption | 1 ... 4 VA |
| Sampling frequency | 20 ... 100 Hz |
| Maximum permanent measurement voltage | 1,5 Vn permanent rated voltage / 2 Vn during 5s |

### Electrical characteristics

| | |
|---|---|
| Insulation voltage, circuit | 2 kV, 50 Hz, 1 min entre mecanismo y caja |

### Measurement accuracy

| | |
|---|---|
| Accuracy | 1,5 % FE |

EC-V
Moving Iron Voltmeters (ac)

| CODE | TYPE | Scale | Accuracy | Modules |
|---|---|---|---|---|
| M10415. | EC48 250V | 90°, P1 | 1,5 | 48x48 |
| M10416. | EC48 300V | 90°, P1 | 1,5 | 48x48 |
| M10417. | EC48 400V | 90°, P1 | 1,5 | 48x48 |
| M10418. | EC48 500V | 90°, P1 | 1,5 | 48x48 |
| M10419. | EC48 600V | 90°, P1 | 1,5 | 48x48 |
| M10410. | EC48 .../110V | 90°, P1 | 1,5 | 48x48 |
| M10425. | EC72 250V | 90°, P1 | 1,5 | 72x72 |
| M10426. | EC72 300V | 90°, P1 | 1,5 | 72x72 |




# EC72 600V

Moving Iron Voltmeters

Code: M10429.

| CODE | TYPE | Scale | Accuracy | Modules |
|---|---|---|---|---|
| M10427. | EC72 400V | 90°, P1 | 1,5 | 72x72 |
| M10428. | EC72 500V | 90°, P1 | 1,5 | 72x72 |
| M10429. | EC72 600V | 90°, P1 | 1,5 | 72x72 |
| M10420. | EC72 .../110V | 90°, P1 | 1,5 | 72x72 |
| M10435. | EC96 250V | 90°, P1 | 1,5 | 96x96 |
| M10436. | EC96 300V | 90°, P1 | 1,5 | 96x96 |
| M10437. | EC96 400V | 90°, P1 | 1,5 | 96x96 |
| M10438. | EC96 500V | 90°, P1 | 1,5 | 96x96 |
| M10439. | EC96 600V | 90°, P1 | 1,5 | 96x96 |
| M10430. | EC96 .../110V | 90°, P1 | 1,5 | 96x96 |

Exchangeable scales, Voltmeters 90°



Creation date: 21/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.




# EC72 600V

Moving Iron Voltmeters

Code: M10429.

## Dimensions

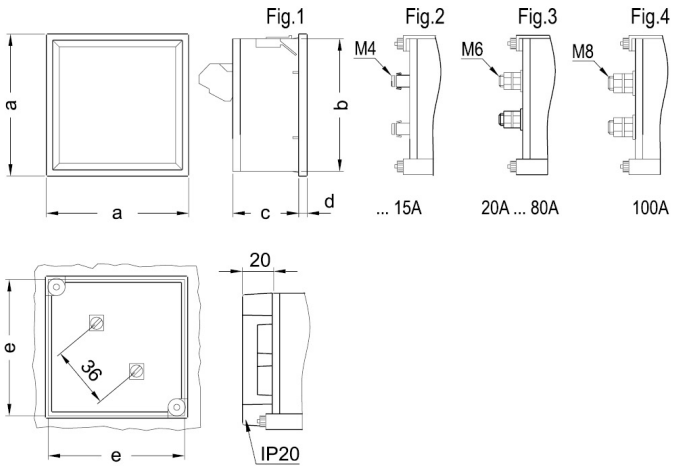


| Type | Fig. EC | Fig. BC | a | b | c | d | e |
|---|---|---|---|---|---|---|---|
| 48 | 1-3 | 1-3 | 48 | 44,7 | 61 | 5,2 | 45 |
| 72 | 1-3-4 | 2-3-4 | 72 | 67,2 | 43,5 | 5,7 | 68 |
| 96 | 1-3-4 | 2-3-4 | 96 | 91 | 43,5 | 5,7 | 92 |
| 144 | 2-3-4 | 2-3-4 | 144 | 137 | 64,5 | 7,3 | 138 |

## Connections

