



EC144 500V

EC144 500V, Voltmeter

Code: M10448.

- > Scale: 90°, P1
- > Accuracy: 1,5
- > Measurement Range (V): 500
- > Modules: 144x144

Description

- No need for auxiliary power supply, only the CEC 96 type
- DIN boxes with dimensions: 48, 72, 96 and 144
- Measurement in true root mean square or V ... 600 V ac
- Exchangeable scales for EC48, EC72, EC96, EM 45
- The alarm system can be fully configured for CEC 96

&nb

Application

In alternating current applications, to control the state of the voltage quickly and visually.



EC144 500V

Moving Iron Voltmeters

Code: M10448.

Specifications

Mechanical characteristics

| | |
|----------------------------------|-----------------------|
| Size (mm) width x height x depth | 144 x 144 x 71.8 (mm) |
| Weight (kg) | 0,43 |

Environmental characteristics

| | |
|---------------------|---|
| Protection class | Panel: IP 52 (Front), IP 20 (Terminals) |
| Storage temperature | -25...+40 °C |
| Working temperature | +10 ... +30 °C |

Standards

| | |
|---------------------------------------|--|
| Certifications | CE, UL |
| Electrical safety, Maximum height (m) | 2000 |
| Standards | BS 89, UNE-EN 60051, IEC 144, UL94, DIN 43780, IEC 51, UNE 21318 |

Voltage measurement circuit

| | |
|---------------------------------------|---|
| Consumption | 1 ... 4 VA |
| Sampling frequency | 20 ... 100 Hz |
| Maximum permanent measurement voltage | 1,5 Vn permanent rated voltage / 2 Vn during 5s |

Electrical characteristics

| | |
|-----------------------------|---|
| Insulation voltage, circuit | 2 kV, 50 Hz, 1 min entre mecanismo y caja |
|-----------------------------|---|

Measurement accuracy

| | |
|----------|----------|
| Accuracy | 1,5 % FE |
|----------|----------|

EC-V

Moving Iron Voltmeters (ac)

| CODE | TYPE | Scale | Accuracy | Modules |
|---------|---------------|---------|----------|---------|
| M10415. | EC48 250V | 90°, P1 | 1,5 | 48x48 |
| M10416. | EC48 300V | 90°, P1 | 1,5 | 48x48 |
| M10417. | EC48 400V | 90°, P1 | 1,5 | 48x48 |
| M10418. | EC48 500V | 90°, P1 | 1,5 | 48x48 |
| M10419. | EC48 600V | 90°, P1 | 1,5 | 48x48 |
| M10410. | EC48 .../110V | 90°, P1 | 1,5 | 48x48 |
| M10425. | EC72 250V | 90°, P1 | 1,5 | 72x72 |
| M10426. | EC72 300V | 90°, P1 | 1,5 | 72x72 |
| M10427. | EC72 400V | 90°, P1 | 1,5 | 72x72 |



EC144 500V

Moving Iron Voltmeters

Code: M10448.

| CODE | TYPE | Scale | Accuracy | Modules |
|---------|----------------|---------|----------|---------|
| M10428. | EC72 500V | 90°, P1 | 1,5 | 72x72 |
| M10429. | EC72 600V | 90°, P1 | 1,5 | 72x72 |
| M10420. | EC72 .../110V | 90°, P1 | 1,5 | 72x72 |
| M10449. | EC144 600V | 90°, P1 | 1,5 | 72x72 |
| M10435. | EC96 250V | 90°, P1 | 1,5 | 96x96 |
| M10436. | EC96 300V | 90°, P1 | 1,5 | 96x96 |
| M10437. | EC96 400V | 90°, P1 | 1,5 | 96x96 |
| M10438. | EC96 500V | 90°, P1 | 1,5 | 96x96 |
| M10439. | EC96 600V | 90°, P1 | 1,5 | 96x96 |
| M10430. | EC96 .../110V | 90°, P1 | 1,5 | 96x96 |
| M10445. | EC144 250V | 90°, P1 | 1,5 | 144x144 |
| M10446. | EC144 300V | 90°, P1 | 1,5 | 144x144 |
| M10447. | EC144 400V | 90°, P1 | 1,5 | 144x144 |
| M10448. | EC144 500V | 90°, P1 | 1,5 | 144x144 |
| M10440. | EC144 .../110V | 90°, P1 | 1,5 | 144x144 |

Exchangeable scales, Voltmeters 90°




EC144 500V

Moving Iron Voltmeters

Code: M10448.

Dimensions

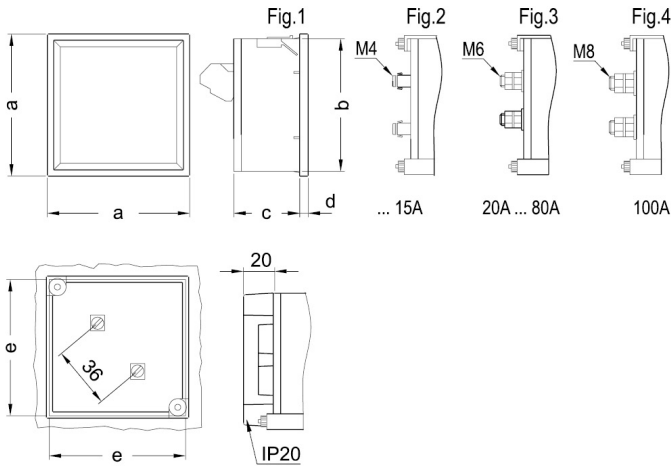

| Type | Fig. EC | Fig. BC | a | b | c | d | e |
|------|---------|---------|-----|------|------|-----|-----|
| 48 | 1-3 | 1-3 | 48 | 44,7 | 61 | 5,2 | 45 |
| 72 | 1-3-4 | 2-3-4 | 72 | 67,2 | 43,5 | 5,7 | 68 |
| 96 | 1-3-4 | 2-3-4 | 96 | 91 | 43,5 | 5,7 | 92 |
| 144 | 2-3-4 | 2-3-4 | 144 | 137 | 64,5 | 7,3 | 138 |

Connections

