

## EZC96 .../5A

EZC96 .../5A, Ammeter

Code: M10930. DESCATALOGADO

- > Scale: 240°, P2
- > Accuracy: 1,5
- > Measurement Range (A): .../5 A
- > Modules: 96x96

### Specifications

#### Mechanical characteristics

|                                  |                     |
|----------------------------------|---------------------|
| Size (mm) width x height x depth | 96 x 96 x 49.2 (mm) |
| Fastening                        | Panel               |
| Weight (kg)                      | 0,144               |

#### Environmental characteristics

|                     |   |
|---------------------|---|
| Protection class    | Panel: IP 52 (Front), IP 00 (Terminals) |
| Storage temperature | -25...+40 °C                            |
| Working temperature | +10 ... +30 °C                          |

#### Standards

|                                       |  |
|---------------------------------------|--|
| Certifications                        | CE   |
| Electrical safety, Maximum height (m) | 2000   |
| Standards                             | BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318 |

#### Current measurement circuit

|                    |  |
|--------------------|--|
| Consumption        | 0,3 ... 1,5 VA   |
| Sampling frequency | 20...100 Hz  |
| Allowable overload | 1,2 In permanent / 5 In during 30s / 10 In during 5s / 40 In during 1s |

#### Electrical characteristics

|                             |   |
|-----------------------------|---|
| Insulation voltage, circuit | 2 KV, 50 HZ <1 min entre mecanismo y caja |
|-----------------------------|---|

#### Measurement accuracy

|          |          |
|----------|----------|
| Accuracy | 1,5 % FE |
|----------|----------|


Exchangeable scales. See next page Indicate transformer ratio



## EZC96 .../5A

Code: M10930.

### Dimensions

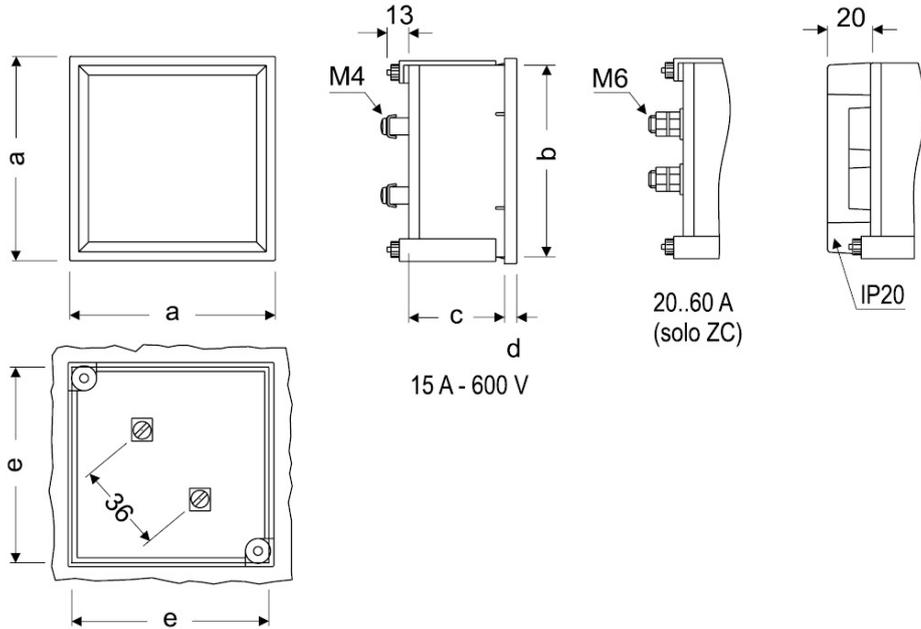

| Type | Fig. ZC | Fig. EZC | a   | b    | c    | d   | e   |
|------|---------|----------|-----|------|------|-----|-----|
| 48   | 1       | -        | 48  | 44,7 | 61   | 5,2 | 45  |
| 72   | 1       | 1        | 72  | 67,2 | 43,5 | 5,7 | 68  |
| 96   | 1       | 1        | 96  | 91   | 43,5 | 5,7 | 92  |
| 144  | 1       | -        | 144 | 137  | 64,5 | 7,3 | 138 |