



EZC96 250V

EZC96 250V, Voltmeter

Code: M11135. DESCATALOGADO

> Scale: 240°, P1 > Accuracy: 5

> Measurement Range (V): 250

> Device: EZC96 > Modules: 96x96

Specifications

| Mechanical characteristics | | | | | |
|---------------------------------------|--|--|--|--|--|
| Size (mm) width x height x depth | 96 x 96 x 49.2 (mm) | | | | |
| Fastening | Panel | | | | |
| Weight (kg) | 0,22 | | | | |
| Environmental characteristics | | | | | |
| Protection class | Panel: IP 52 (Front), IP 00 (Terminals) | | | | |
| Storage temperature | -25+40 °C | | | | |
| Working temperature | +10 +30 °C | | | | |
| Standards | | | | | |
| Certifications | CE | | | | |
| Electrical safety, Maximum height (m) | 2000 | | | | |
| Standards | BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318 | | | | |
| Voltage measurement circuit | | | | | |
| Consumption | 1 4 VA | | | | |
| Sampling frequency | 20 100 Hz | | | | |
| Maximum permanent measurement voltage | 1,5 Vn permanent rated voltage / 2 Vn during 5s | | | | |
| Electrical characteristics | | | | | |
| Insulation voltage, circuit | 2 kV, 50 Hz, 1 min entre mecanismo y caja | | | | |
| Measurement accuracy | | | | | |
| Accuracy | 5 % FE | | | | |








EZC96 250V

Moving Iron Voltmeters (ac) 240°

Code: M11135.

Dimensions

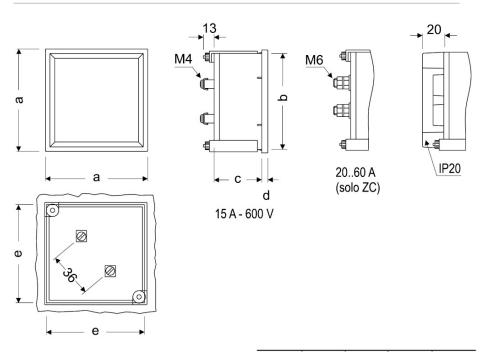

| Туре | Fig. ZC | Fig. EZC | а | b | С | d | е |
|------|---------|----------|-----|------|------|-----|-----|
| 48 | 1 | - | 48 | 44,7 | 61 | 5,2 | 45 |
| 72 | 1 | 1 | 72 | 67,2 | 43,5 | 5,7 | 68 |
| 96 | 1 | 1 | 96 | 91 | 43,5 | 5,7 | 92 |
| 144 | 1 | - | 144 | 137 | 64,5 | 7,3 | 138 |

