



ZC96 0...10V

ZC96 0...10V, Process indicator

Code: M12533. DESCATALOGADO

- > Scale: 240° P1
- > Accuracy: 1,5
- > Full scale: 0...10 V
- > Modules: 96x96

Description

- Does not need an auxiliary power supply.
- DIN boxes with dimensions 48, 72, 96 and 144 mm.
- Precision class 1,5
- Measurement in D.C. of 0 ... 10 V, 0/4 ... 20 mA, .../60 mV
- Exchangeable scales for BC48, BC72, BC96, BM 45

Application

For the measurement of the mean value of voltages and currents in direct current circuits, even of the pulsating type, in a vast margin of values.



ZC96 0...10V

Process indicator

Code: M12533.

Specifications

Mechanical characteristics

| | |
|----------------------------------|---------------------|
| Size (mm) width x height x depth | 96 x 96 x 49.2 (mm) |
| Fastening | Panel |
| Weight (kg) | 0,21 |

ZC
Process indicators, 240°

| CODE | TYPE | Scale | Accuracy | Modules | Full scale |
|---------|---------------|---------|----------|---------|------------|
| M12523. | ZC72 0...10V | 240° P1 | 1,5 | 72x72 | 0...10 V |
| M12521. | ZC72 4...20mA | 240° P1 | 1,5 | 72x72 | 4...20 mA |

Scales included in the price (*) The 6-digit code includes the 4 ... 20 mA scale




ZC96 0...10V

Process indicator

Code: M12533.

Dimensions

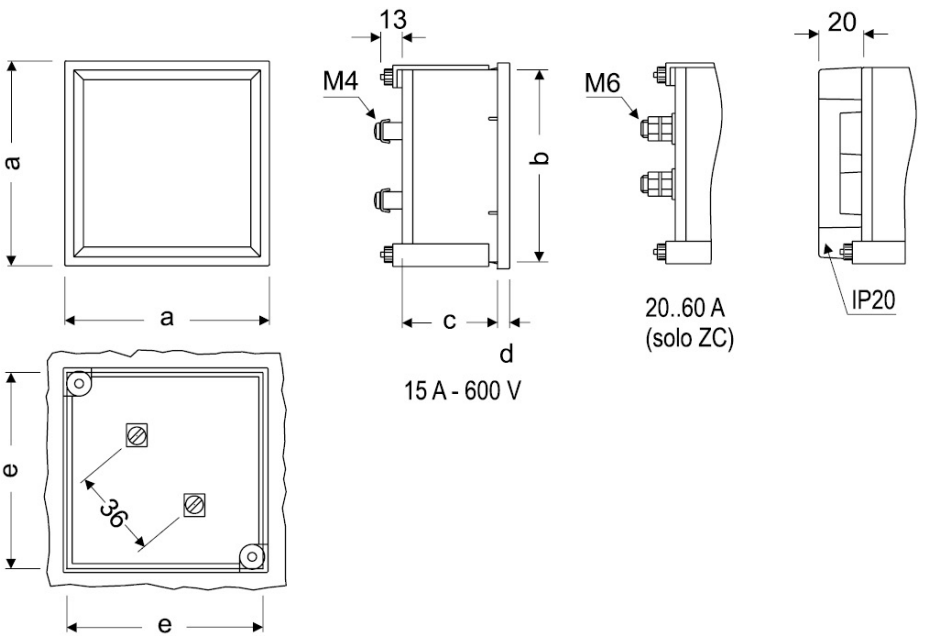

| Type | Fig. ZC | Fig. EZC | a | b | c | d | e |
|------|---------|----------|-----|------|------|-----|-----|
| 48 | 1 | - | 48 | 44,7 | 61 | 5,2 | 45 |
| 72 | 1 | 1 | 72 | 67,2 | 43,5 | 5,7 | 68 |
| 96 | 1 | 1 | 96 | 91 | 43,5 | 5,7 | 92 |
| 144 | 1 | - | 144 | 137 | 64,5 | 7,3 | 138 |