



## UC72 150...500V

UC72 150...500V, Sequence-Ind.

Code: M13721. **CONSULTAR DISPONIBILIDAD**

- > Measurement Range (V): 150...500
- > Device: UC72
- > Modules: 72x72

### Description

A completely electronic circuit without moving parts allows easily activation of LED

### Application

**UC72** and **UC96** types indicate the phase sequence type in three-phase networks.

**CUC96**, besides indicating the phase sequence type, have a relay with a free voltage switch-over contact. The relay opens in voltage lack situation or when the phase rotation sense is wrong.



# UC72 150...500V

Code: M13721.

## Specifications

### Mechanical characteristics

Size (mm) width x height x depth	72 x 72 x 62.9 (mm)
Fastening	Panel
Weight (kg)	0,145

### Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 00 (Terminals)
Storage temperature	-40 ... +70 °C
Working temperature	0 ... +70 °C

### Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

### Current measurement circuit

Consumption	3 mA
Sampling frequency	50 Hz

### Voltage measurement circuit

Nominal voltage	230 V~ (optional 100-120 V~ / 380-440 V~)
Maximum permanent measurement voltage	1,2 Vn permanent rated voltage / 2 Vn during 5s

### Measurement accuracy


Accuracy	1,5 % FE
----------	----------



UC72 150...500V

Code: M13721.

Dimensions

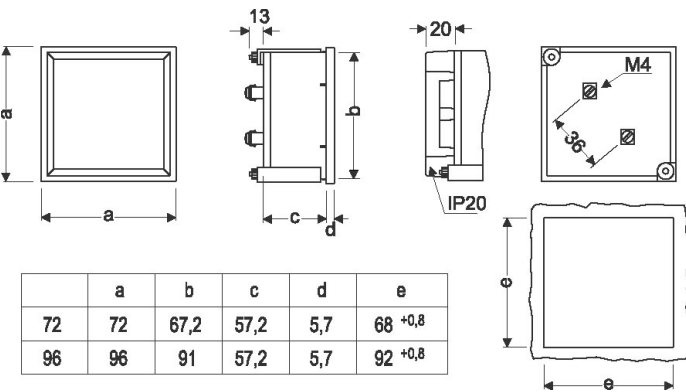

Connections

