,

Code:

Description

A completely electronic circuit without moving parts allows easily activation of LED

Application

UC72 and **UC96** types indicate the phase sequence type in three-phase networks.
CUC96, besides indicating the phase sequence type, have a realy with a free voltage switch-over contact.
The relay opens in voltage lack situation or when the phase rotation sense is wrong.

Creation date: 28/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Code:

Specifications

Mechanical characteristics

Size (mm) width x height x depth	96 x 96 x 62.9 (mm)
Weight (kg)	0,375

UC / CUC

Phase sequence indicators


CODE	TYPE	Modules	Device
M13721.	UC72 150...500V	72x72	UC72
M13731.	UC96 150...500V	96x96	UC96
M13755.	CUC96 400V	96x96	CUC96

Creation date: 28/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Code:

Connections

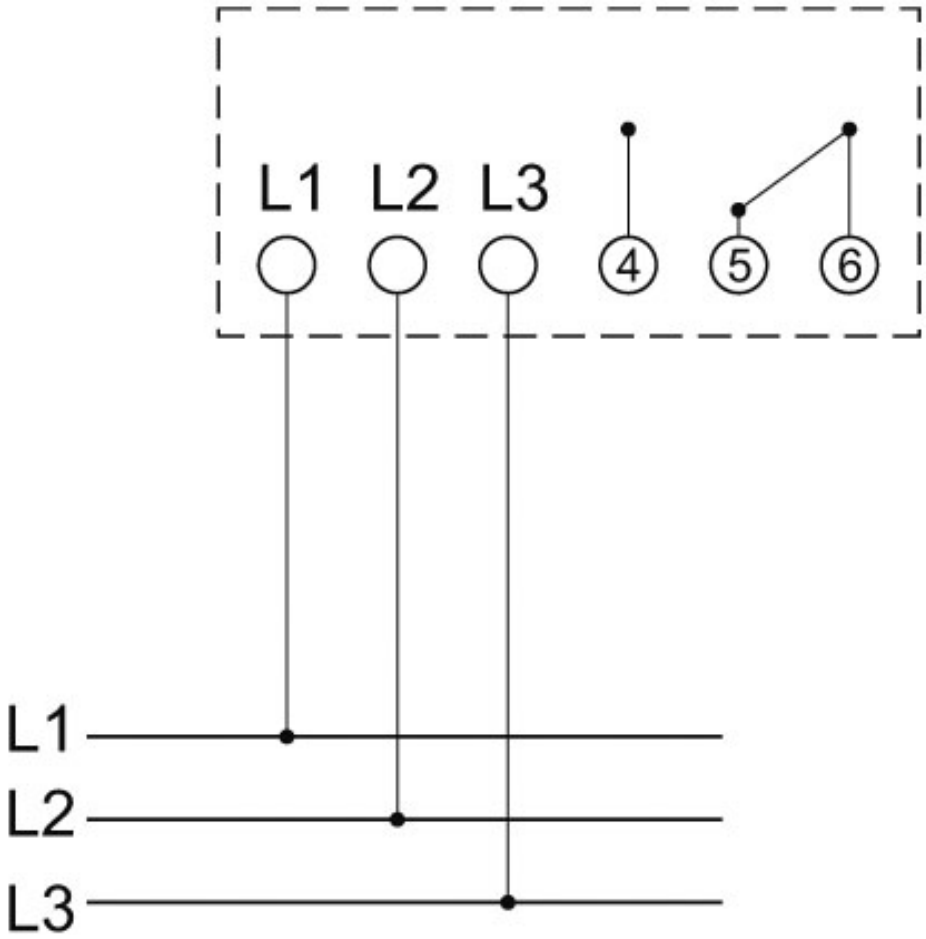

Creation date: 28/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.