



CUC96 400V

CUC96 400V, Sequence-Ind.

Code: M13755.

- > N° relays: 1
- > Measurement Range (V): 400
- > Device: CUC96
- > Modules: 96x96

Description

A completely electronic circuit without moving parts allows easily activation of LED

Application

UC72 and **UC96** types indicate the phase sequence type in three-phase networks.

CUC96, besides indicating the phase sequence type, have a relay with a free voltage switch-over contact. The relay opens in voltage lack situation or when the phase rotation sense is wrong.



CUC96 400V

Code: M13755.

Specifications

Mechanical characteristics

Size (mm) width x height x depth	96 x 96 x 62.9 (mm)
Fastening	Panel
Weight (kg)	0,375

Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 00 (Terminals)
Storage temperature	-40 ... +70 °C
Working temperature	0 ... +70 °C

Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

Current measurement circuit

Consumption	4 VA
Sampling frequency	50 Hz

Voltage measurement circuit

Nominal voltage	230 V~ (optional 100-120 V~ / 380-440 V~)
Maximum permanent measurement voltage	1,2 Vn permanent rated voltage / 2 Vn during 5s

Measurement accuracy

Accuracy	1,5 % FE
----------	----------

UC / CUC

Phase sequence indicators


CODE	TYPE	Modules	Device
M13721.	UC72 150...500V	72x72	UC72
M13731.	UC96 150...500V	96x96	UC96
M13755.	CUC96 400V	96x96	CUC96



CUC96 400V

Code: M13755.

Dimensions

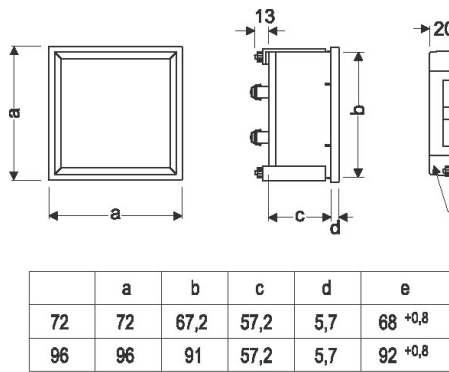

Connections

