

CH72



CH72, Hour run meter

Code: M14921.

- > Frequency (Hz): 50
- > Display: Visualizador electromecánico
- > Modules: 72x72

Application

- Timers are used to measure time with a simple, easy and reliable system.
- Measurement of start-up and operating times.
- Modification and operating times.
- Production and quantity times.
- Data to provide information about the following

CH72



Hour run meters

Code: M14921.

Specifications**AC power supply**

Frequency	50/60 Hz
Nominal voltage	230 Vca

Mechanical characteristics

Size (mm) width x height x depth	72 x 72 x 62.9 (mm)
Fastening	Panel
Weight (kg)	0,114

Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 00 (Terminals)
Storage temperature	-25...+40 °C
Working temperature	+10 ... +30 °C

Standards

Certifications	CE
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

Current measurement circuit

Consumption	10 mA
-------------	-------

User interface

Display format	1,5 x 3,5 mm mit lupe
Range	99999,99
Display type	Mechanic

CH

Hour run meters

CODE	TYPE	Modules	Frequency (Hz)
M14911.	CH48	48x48	50
M14921.	CH72	72x72	50
M14931.	CH96	96x96	50
M14951.	CH45		50


CH72



Hour run meters

Code: M14921.

Dimensions

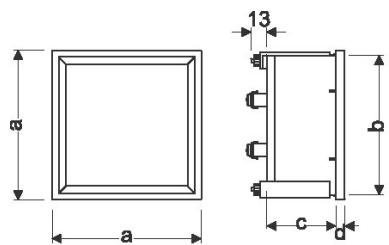

	a	b	c	d	e
72	72	67,2	57,2	5,7	68 ^{+0,8}
96	96	91	57,2	5,7	92 ^{+0,8}

Connections

