

MC72 .../5A 120%

MC72 .../5A 120%, Maximetro

Code: M15521. **DESCATALOGADO**

> Scale: 90°, P1, 2
> Accuracy: 3
> Measurement Range (A): .../5 A
> Modules: 72x72

Specifications

Mechanical characteristics

Size (mm) width x height x depth	72 x 72 x 49.2 (mm)
Fastening	Panel
Weight (kg)	0,14

Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 00 (Terminals)
Storage temperature	-25 ... +40 °C
Working temperature	+10 ... +30 °C

Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

Current measurement circuit

Consumption	3,25 VA
Allowable overload	1,5 In permanent / 15 In during 1s

Electrical characteristics

Insulation voltage, circuit	2 KV A 50 HZ < 1min entre mecanismo y caja

Measurement accuracy

Accuracy	± 3 % FE

MC
Maximeter ammeters

CODE	TYPE	Scale	Accuracy	Measurement Range (A)	Modules
M12231.	MC96 .../5 A	90°, P1, 2	3	.../5 A	96x96
M15531.	MC96 .../5A 120%	90°, P1, 2	3	.../5 A	96x96

Scale NOT included


Creation date: 20/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



MC72 .../5A 120%

Code: M15521.

Connections

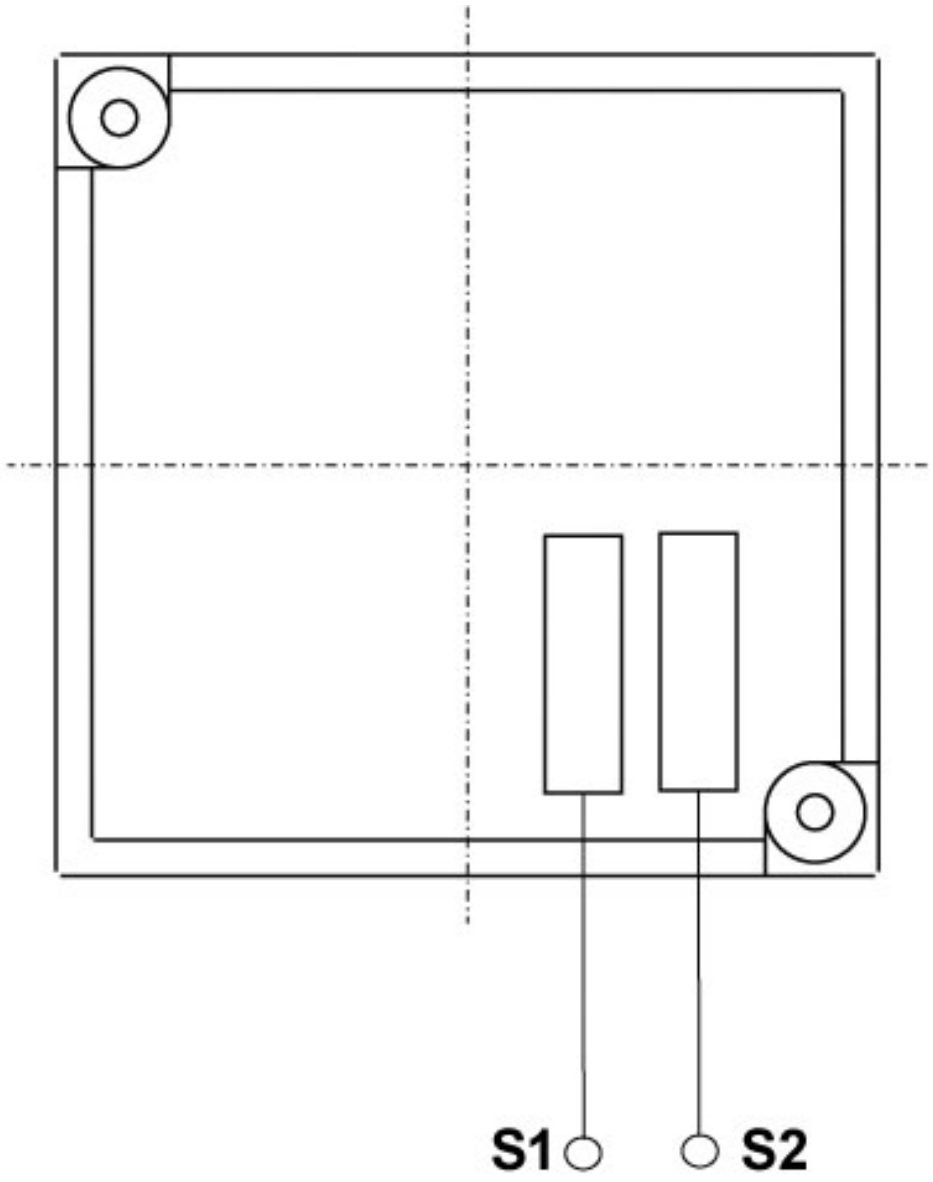

Creation date: 20/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.