



## DM45-A

DM45-A, Ammeter

Code: M20911. DESCATALOGADO

- > N° relays: 1
- > System: AC
- > Measure: ... / 5 Aac
- > Paramètre: Ammeter
- > Mounting: DIN rail

### Description

- Electrical parameter indicator equipment
- Its design enables the installation of the unit on small panels
- It measures voltage, current, frequency and harmonic distortion, depending on the type
- Fully sealed
- Fully programmable alarm relay
- Robust and compact
- Stores maximum and minimum values

### Application

- Displays one or various electrical parameters of a sub-panel, control process or determined machine.
- Alarm system: the unit's internal relay can act on contactors, sound and/or light devices to carry out a protection or warning operation.



# DM45-A

Digital instruments, DIN rail

Code: M20911.

## Specifications

### AC power supply

|                 |                |
|-----------------|----------------|
| Consumption     | 5 VA           |
| Frequency       | 40...70 Hz.    |
| Nominal voltage | 115 / 230 Vc.a |

### Mechanical characteristics

|                                  |                        |
|----------------------------------|------------------------|
| Size (mm) width x height x depth | 36 x 85 x 63.8 (mm)    |
| Envelope                         | Self-extinguishing ABS |
| Weight (kg)                      | 0,193                  |

### Environmental characteristics

|  |   |
|--|---|
| Protection class                         | IP 20 / IP 54 with terminal cover (optional) (for models Ø 85, 100, 116 mm) |
| Relative humidity (without condensation) | 5...95 %  |
| Storage temperature                      | -40...+70 °C  |
| Working temperature                      | -20...+50 °C  |

### Current measurement circuit

|                             |                  |
|-----------------------------|------------------|
| Allowable overload          | 1,2 In permanent |
| Refresh rate                | 1 lectura/s      |
| Maximum current             | 5 Ac.a.          |
| Minimum current measurement | 0,05 Aac         |
| Resolution                  | 10 bits          |

### Voltage measurement circuit

|             |        |
|-------------|--------|
| Consumption | 0,6 VA |
|-------------|--------|

### User interface

|                           |                            |
|---------------------------|----------------------------|
| LED                       | 4                          |
| Range                     | 0,000...9999               |
| Resolution of the display | 30                         |
| Display type              | 7 segments (4 digits), red |

### Standards

|           |  |
|-----------|--|
| Standards | EN 61000-6-3, EN 61000-6-1, IEC 61010-1, IEC 60664 |
|-----------|--|

### Digital relay outputs

|                            |            |
|----------------------------|------------|
| Contact-coil insulation    | 2000 Vc.a. |
| Contact-contact insulation | 750 Vc.a.  |
| Nominal current            | 5 Aac      |



# DM45-A

Digital instruments, DIN rail

Code: M20911.

|                              |           |
|------------------------------|-----------|
| Insulation resistance        | > 1000 MΩ |
| Resistive load (max.)        | 750 VA    |
| Maximum open contact voltage | 250 Vac   |

Measurement accuracy

|                           |                        |
|---------------------------|------------------------|
| Phase current measurement | ± 0,5 % FS (± 1 digit) |
|---------------------------|------------------------|

Other information of interest: Size: 2 modules




## DM45-A


Digital instruments, DIN rail

Code: M20911.

### Dimensions

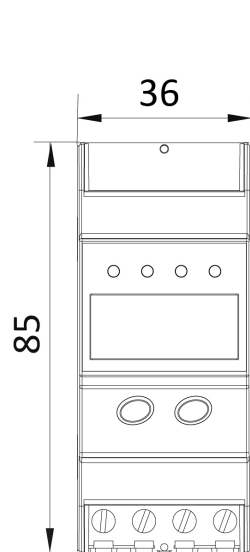

DIN RAIL  
46227

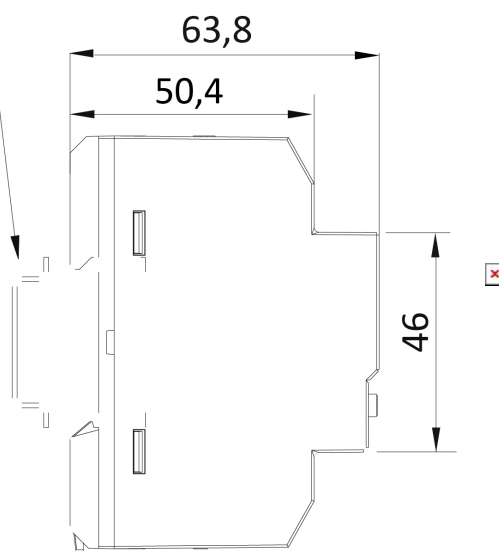

### Connections