CW-TA Out2

CW-TA Out2, Transducer kW

Code: M25232.

> Output type: 2

> Analog output: 4...20mA

> System: Unbalanaced three-phase ARON (3 wires)

> Paramètre: kW

Description

The **CW** transducers, convert the signal measured to D.C. signal process.
The analog output is directly proportional to active power - single phase measurement. The measurement is in true RMS.

Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

CW-TA Out2

Active power transducer

Code: M25232.

Specifications

AC power supply, insulation

Pulse test (kV)	4 kV (1,2/50µs)
Test voltage (kV)	3 kV RMS 50 Hz 1min

AC power supply

Consumption	3 VA
Frequency	40...90 Hz
Nominal voltage	24/115/230/400 Vca (-15...+20 %)

Mechanical characteristics

Size (mm) width x height x depth	95 x 72 x 110 (mm)
Weight (kg)	0,475

Environmental characteristics

Protection class	IP 20 (Terminals) IP 40 (case)
Storage temperature	-40....+70 °C
Working temperature	-10...+55 °C

Current measurement circuit

Consumption	0,2 VA
Nominal current (In)	1 A / 5 A
Phase current measurement	0...150 % In
Allowable overload	300 % In permanent

Voltage measurement circuit

Input impedance	3000 Ω/V
Frequency measuring range	45...65 Hz
Voltage measuring range	0...150 % Vn
Nominal voltage	0...660 Vca
Maximum permanent measurement voltage	1000 V

Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 529, IEC 688, IEC 801, EN 50081-2, EN 50082-2, IEC 1010

Analogue inputs

Load impedance in current	< 500 Ω
Ripple (effective RMS value)	< 0,5 %
Load impedance in voltage	> 500 Ω

CW-TA Out2

Active power transducer

Code: M25232.

Response time	< 300 ms (0...99 % Vn)

Analogue outputs

Current mode, nominal range	0...10, 20 mAac
Displaced output	0,2...2 V / 2...10 V / 4...20 mA
Voltage mode: nominal output range	0...5, 10 Vac

Measurement accuracy

Phase current measurement	0,5 % FS

CW
Active power transducer

CODE	TYPE	Output type	Analog output	System	Paramètre
Active power. Auxiliary supply 230 V, 40...90 Hz, Accuracy: ± 0,5 % reading					
M25212.	CW-M Out2	2	4...20mA	Single-phase	kW
M25232.	CW-TA Out2	2	4...20mA	Unbalanaced three-phase ARON (3 wires)	kW

Indicate: Zero value, fullscale, type of output, Un (between phases), In and fn.
For other values, see coding table on following pages

CW-TA Out2

Active power transducer

Code: M25232.

Dimensions

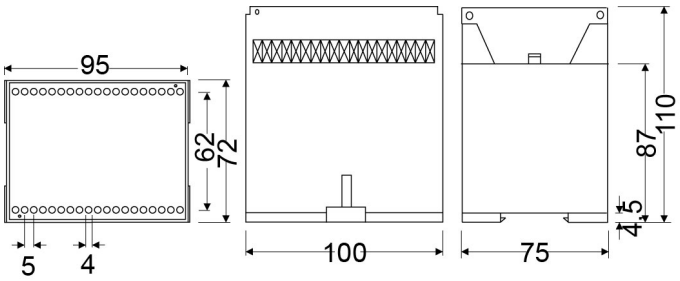

Connections

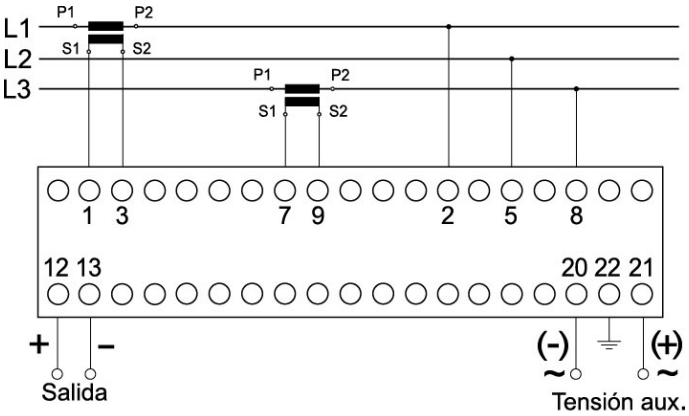

CW-TA

Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.