



CVM-D50-MC

CVM-D50-MC, Three-phase power analyser with DIN-rail memory

Code: M56580.

- > Protocol: Modbus/TCP
- > Memory: Yes
- > Communications: Ethernet | Wi-Fi
- > Harmonics: 31
- > Power supply: 90...264 Vac/Vdc
- > Input current: .../250 mA
- > Mounting: DIN rail

Description

Three-phase power analyzer (balanced and unbalanced) for assembly on DIN rail, very small, with 4-quadrant measurements and integrated memory for data logging.

Main features include:

- Current measurement (depending on model) .../5 or.../1 A or.../250 mA or Rogowski-type sensors.
- Wi-Fi and Ethernet communications (Modbus TCP/IP).
- Integrated memory.
- With web Server to view, configure and download data.
- Compatible with the MyConfig app.
- Sealable with terminal cover.
- Display of THD% and up to the 31st harmonic (V, A).
- DIN rail format just 3 modules wide.
- High-contrast backlit display.
- 72 x 72 mm panel mount with front adapter

Application

- Control application in distribution panels and low- and medium-voltage connections where an analyzer has to be installed on the DIN rail due to space constraints.
- Alarm control: Maximum value, minimum, delay and programmable interlocking.
- Logging of active or capacitive and inductive reactive energy.
- Capture and storage of instantaneous, maximum and minimum data of the electrical parameters measured.



CVM-D50-MC

Three-phase power analyser with DIN-rail memory

Code: M56580.

Specifications

AC power supply

| | |
|-----------------------|-----------------------|
| Installation category | CAT III 300 V |
| Consumption | 2,7 ... 4 VA |
| Frequency | 50...60 Hz |
| Nominal voltage | 100 ... 240 V~ ± 10 % |

DC power supply

| | |
|-----------------|--------------------------|
| Consumption | 1,8 ... 2 W |
| Nominal voltage | 100 ... 240 Vd.c. ± 10 % |

Mechanical characteristics

| | |
|----------------------------------|-------------------------------|
| Size (mm) width x height x depth | 52,5 x 118 x 74 (mm) |
| Envelope | Self-extinguishing VO plastic |
| Fastening | DIN rail |
| Weight (kg) | 0,25 |

Environmental characteristics

| | |
|--|---------------------------|
| Protection class | IP 30 / Front: IP 40 IK08 |
| Relative humidity (without condensation) | 5...95% |
| Storage temperature | -30 ... +80 °C |
| Working temperature | -10 ... +50 °C |

Current measurement circuit

| | |
|-----------------------------------|-------------------|
| Installation category | CAT III 300 V |
| Nominal current (In) | .../0,250 A |
| Phase current measuring range | 10% ≤ In ≤120% In |
| Maximum input current consumption | 0,9 VA |
| Minimum current measurement | 1 % In |

Voltage measurement circuit

| | |
|--------------------------------------|-----------------------|
| Installation category | CAT III 300 V |
| Input impedance | 400 kΩ |
| Frequency measuring range | 45...65 Hz |
| Nominal voltage | 230V Ph-N, 400V Ph-Ph |
| Minimum measurement voltage (Vstart) | 11,5 V Ph-N |

Communication Network

| | |
|------------------------|-------------------------|
| Protocol | Modbus TCP - Web server |
| Technology / Interface | Ethernet |



CVM-D50-MC

Three-phase power analyser with DIN-rail memory

Code: M56580.

Standards

| | |
|--|---|
| Electrical safety, Maximum height (m) | 2000 |
| Electrical safety, Contamination level/class | 2 |
| Standards | IEC/EN 61010-1; IEC/EN 61010-2-030; UNE-EN 55016-2-1; UNE-EN 61000-4-2; UNE-EN 61000-4-20; UNE-EN 61000-4-4; UNE-EN 61000-4-5; UNE-EN 61000-4-6; UNE-EN 61000-4-8; UNE-EN IEC 61000-4-11; UNE-EN 61000-4-3; ETSI-EN 301 489-1 Ver. 2.1.1; ETSI-EN 301 489-17 Ver. 3.1.1; UNE-EN 60068-2-1; UNE-EN 60068-2-2:2008; UNE-EN 60068-2-78; IEC 61557-12; EN 18031-1 |

User interface

| | |
|--------------|----------------|
| Keyboard | 3 keys |
| Display type | LCD Custom COG |

Measurement accuracy

| | |
|-------------------------------|--|
| Frequency measurement | 0,50% |
| Phase current measurement | 0,5 % \pm 1 digit ($10\% \leq I \leq 100\% I_n$) |
| Active power measurement (kW) | 1 % \pm 2 digit |
| Phase voltage measurement | 0,5% \pm 1 digit (5 ... 120 % U_n) |

Wireless communication

| | |
|-------------------|---|
| Band | Wi-Fi (2.4 ... 2.5 GHz.) |
| Technology / Type | Wi-Fi, IEEE 802.11 b/g, IEEE 802.11 n (Up 150 Mbps) |

CVM-D50

Din rail three-phase power analyser with memory

| CODE | TYPE | Power supply | Input current | Communications | Protocol | Harmonics | Memory |
|---------|--------------|------------------|-------------------|------------------|------------|-----------|--------|
| M56570. | CVM-D50-ITF | 90...264 Vac/Vdc | .../5 A .../1 A | Ethernet Wi-Fi | Modbus/TCP | 31 | Yes |
| M56580. | CVM-D50-MC | 90...264 Vac/Vdc | .../250 mA | Ethernet Wi-Fi | Modbus/TCP | 31 | Yes |
| M56590. | CVM-D50-FLEX | 90...264 Vac/Vdc | Rogowski | Ethernet Wi-Fi | Modbus/TCP | 31 | Yes |

It has a free configuration App (MyConfig) and WebServer for configuration, visualization and data download




CVM-D50-MC

Three-phase power analyser with DIN-rail memory

Code: M56580.

Dimensions

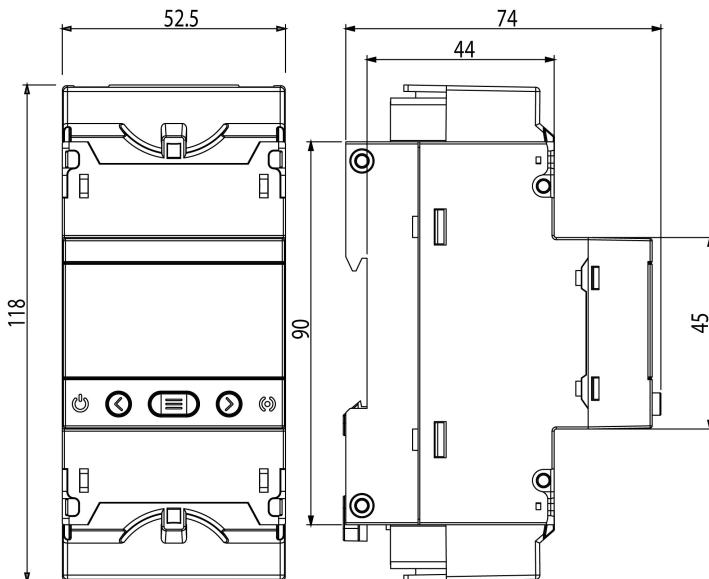

Connections

4-wire three-phase network RED trifásica - 4 hilos

