

Line-M-3G

Line-M-3G, 3G/GPRS communications modem and Bus-Line to communicate with Line-EDS devices,

Code: M58E07. **DESCATALOGADO**

Specifications

AC power supply

Installation category	CAT III 300V
Consumption	2,8 ... 4,1 VA
auxiliary power supply mode	Through the line-EDS device

DC power supply

Consumption	1,9 ... 2,2 W

Mechanical characteristics

Size (mm) width x height x depth	35 x 93.85 x 88.95 (mm)
Envelope	Self-extinguishing V0 plastic
Fastening	DIN rail (IEC 60715)
Weight (kg)	0,178

Environmental characteristics

Protection class	IP30, Front: IP40
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20 ... +70 °C
Working temperature	-10 ... +50 °C

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Standards	UNE-EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4, UNE EN 60068-2-1, UNE EN 60068-2-2, UNE EN 60068-2-78, ETSI EN 301 489-1 Ver. 2.1.1, ETSI EN 301 489-17 Ver. 3.1.1, ETSI EN 301 489-52 Ver. 1.1.0

User interface

LED	4 LED

Radio communication -Antenna

	SMA (Right Angle)

Radio communication

Band	850/900/1700/1800/1900/2100 MHz
Technology / Type	3G

Bus-Line: RS-485 communication system, with side connector between modules


Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Line-M-3G

Code: M58E07.

Dimensions

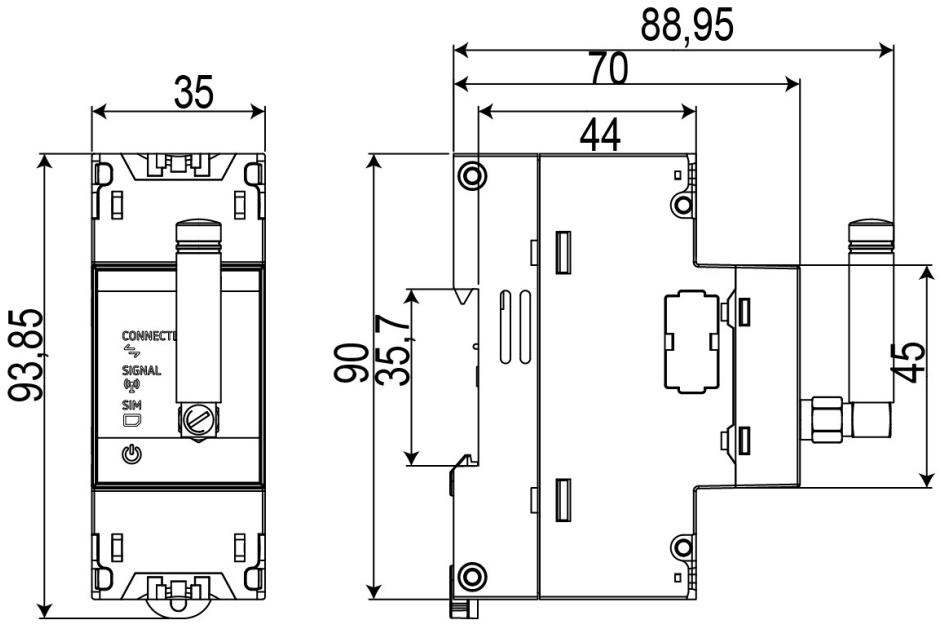

Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.