



## TP-23 150 /5A

TP-23 150 /5A

Code: M70112. (CONSULTAR DISPONIBILIDAD)

- > Transformer
- > Flat strip(mm): 20 x 30
- > Class 3 Power (VA): 2
- > Measurement Range (A): 150/5
- > Input current: 150/5 A

### Specifications

#### Electrical characteristics

Safety factor (SF)	FS 10
Power	2 VA (Class 3)

#### Mechanical characteristics

Size (mm) width x height x depth	110 x 89 x 58 (mm)
Weight (kg)	0,72

#### Environmental characteristics

Thermal Class	Class B (+130 °C)
Working temperature	-5 ... 40 °C

#### Specific technical characteristics of current sensors

Operating voltage	0,72 kV~ max.
-------------------	---------------

#### Current measurement circuit

Nominal frequency	50 / 60 Hz
Primary current measurement	150 A
Dynamic current (I <sub>dyn</sub> )	2,5 I <sub>th</sub>
Thermal short-circuit current (I <sub>th</sub> )	60 I <sub>n</sub>
Transformation ratio	... / 5 A

#### Standards

Standards	IEC 44-1, UNE 21 088-1, UL 94, VDE 0414
-----------	---




## TP-23 150 /5A

Split-core measurement current transformer

Code: M70112.

### Dimensions

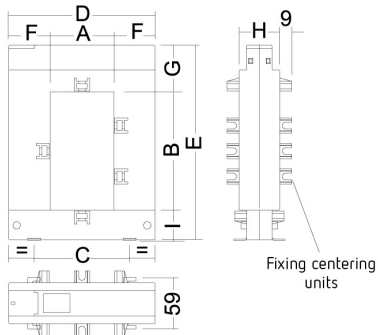

Dimensions (mm)	TP-58	TP-88	TP-812	TP-816
a	50	80	80	80
b	80	80	120	160
c	78	108	108	120
d	114	144	144	184
e	145	145	185	245
f	32	32	32	52
g	32	32	32	47
h	32	32	32	52
i	32	32	32	38