

TCH12 3200/5A

TCH12 3200/5A, Current transformers high accuracy and narrow section

Code: M7048B. CONSULTAR DISPONIBILIDAD

- > Flat strip(mm): 100 x 50
- > System: Single-phase
- > Class 0,2 Power (VA): 25
- > Class 0,2S Power (VA): 20
- > Class 0,5S Power (VA): 25
- > Measurement Range (A): 3200/5
- > Input current: 3200 A
- > Transformer type: Closed core

Description

- Type: bar entrance
- $\circ~$ Types: from 40 to 4000 A
- $\circ~$ Internal diameter: from 20.3 to 63 mm, depending on the type
- $\circ~$ Busbar dimensions: from 25 x 5 mm to 30 x 100 mm
- Transformer certificate sheet is attached
- $\circ~$ Accessory on request for fixing on DIN rail (Types TCH6 and TCH6.2)
- $\circ~$ Secondary coding types .../5 A (on demand .../1 A.)

Application

Converting a high nominal current to a lower current so that it can be measured by the unit. In installations where the electrical supply can be interrupted to install transformers and a high accuracy is required.

Circutor



TCH12 3200/5A

Current transformers narrow section and high accuracy

Code: M7048B.

Specifications

Safety factor (SF)	FS 5		
Power	25 VA (Class 0,2)		
Aechanical characteristics			
Size (mm) width x height x depth	129 x 155 x 78 (mm)		
Envelope	Plastic wrap VO self-extinguishing, UL 94		
Weight (kg)	1,15		
Invironmental characteristics			
Thermal Class	Class B (+130 °C)		
Protection class	IP 20		
Relative humidity (without condensation)	15 95 %		
Relative Humbley (without condensation)	15 95 %		
Specific technical characteristics of current sensors	ت ع ال ال		
	0,72 kV~ max.		
Specific technical characteristics of current sensors			
Operating voltage			
Specific technical characteristics of current sensors Operating voltage Current measurement circuit	0,72 kV~ max.		
Operating voltage Current measurement circuit Nominal frequency	0,72 kV~ max. 50 / 60 Hz		
Specific technical characteristics of current sensors Operating voltage Current measurement circuit Nominal frequency Primary current measurement	0,72 kV~ max. 50 / 60 Hz 3200 A		
Operating voltage Current measurement circuit Nominal frequency Primary current measurement Dynamic current (Idyn)	0,72 kV~ max. 50 / 60 Hz 3200 A 2,5 lth		
Specific technical characteristics of current sensors Operating voltage Current measurement circuit Nominal frequency Primary current measurement Dynamic current (Idyn) Thermal short-circuit current (Ith)	0,72 kV~ max. 50 / 60 Hz 3200 A 2,5 Ith 60 In		

тсн

Current transformers narrow section and high accuracy

CODE	TYPE	Measurement Range (A)	Flat strip(mm)	Class 0,2 Power (VA)	Class 0,2S Power (VA)	Class 0,5S Power (VA)
TCH6.2						
M70444.	TCH6.2 200/5A	200/5	20 x 20 25 x 12 30 x 10	5	3,5	5

For other configurations see table of additional features






TCH12 3200/5A

Current transformers narrow section and high accuracy

Code: M7048B.

Dimensions

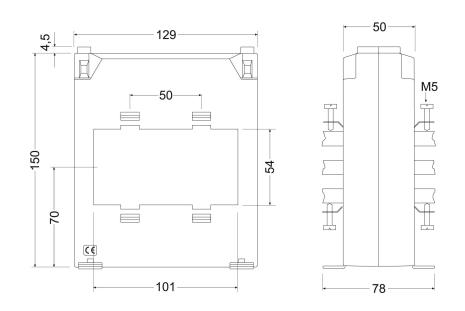

Circutor