

### SHB 2.5A/60mV



SHB 2.5A/60mV, Shunt

Code: M71223.

- > Accuracy: 0.5
- > Measurement Range (A): 2.5A/60mV
- > Input current: 2.5 A > Relation: 2,5A/60mV

#### Description

- o Shunt for the measurement of DC, from 1 A dc to 15 000 A dc, depending on the type
- o Accuracy class: 0.5
- o All types are supplied with 1.5 m long cables, with a section of 1.5 m<sup>2</sup>
- $\circ~$  The standard output voltage is .../60 mV, but there are other types of outputs on demand, see coding table.

#### **Application**

Used in DC electrical lines to obtain a voltage signal that is proportional to the current through the shunt







# SHB 2.5A/60mV

Shunts

Code: M71223.

### **Specifications**

Electrical characteristics	
Permanent overload	1,2 ln
Environmental characteristics	
Working temperature	-25 +60 °C
Mechanical characteristics	
Envelope	Manganin rods Brass terminals
Weight (kg)	0,15
Current measurement circuit	
Nominal frequency	50 / 60 Hz
Primary current measurement	2,5 A
Allowable overload	During 5 s 10 ln, yes 10 A $\leq$ ln $\leq$ 500 A 5 ln, yes 600 A $\leq$ ln $\leq$ 2000 A 2 ln, yes 2500 A $\leq$ ln
Transformation ratio	/ 60 mV
Standards	
Standards	DIN 43703, IEC 51, VDE 410, BS 89
Measurement accuracy	
Accuracy	0.5

# Shunts for direct current measurement

CODE	TYPE	Measurement Range (A)	
M71221.	SHB 1A/60mV	1A/60mV	
M71222.	SHB 1.5A/60mV	1.5A/60mV	
M71223.	SHB 2.5A/60mV	2.5A/60mV	
M71224.	SHB 4A/60mV	4A/60mV	
M71225.	SHB 5A/60mV	5A/60mV	
M71226.	SHB 6A/60mV	6A/60mV	
M71227.	SHB 10A/60mV	10A/60mV	
M71228.	SHB 15A/60mV	15A/60mV	
M71229.	SHB 25A/60mV	25A/60mV	
M7122A.	SHB 30A/60mV	30A/60mV	
M7122B.	SHB 40A/60mV	40A/60mV	







## SHB 2.5A/60mV

Shunts

Code: M71223.

CODE	ТҮРЕ	Measurement Range (A)
M7122C.	SHB 50A/60mV	50A/60mV
M7122D.	SHB 60A/60mV	60A/60mV
M7122E.	SHB 80A/60mV	80A/60mV
M7122F.	SHB 100A/60mV	100A/60mV
M7122N.	SHB 200A/60mV	200A/60mV
M71231.	SH 30A/60mV	30A/60mV
M71232.	SH 40A/60mV	40A/60mV
M71233.	SH 50A/60mV	50A/60mV
M71234.	SH 60A/60mV	60A/60mV
M71235.	SH 80A/60mV	80A/60mV
M71236.	SH 100A/60mV	100A/60mV
M71237.	SH 150A/60mV	150A/60mV
M71238.	SH 200A/60mV	200A/60mV
M71239.	SH 250A/60mV	250A/60mV
M7123A.	SH 300A/60mV	300A/60mV
M7123B.	SH 400A/60mV	400A/60mV
M7123C.	SH 500A/60mV	500A/60mV
M7123D.	SH 600A/60mV	600A/60mV
M7123E.	SH 750A/60mV	750A/60mV
M7123F.	SH 800A/60mV	800A/A00W
M7123G.	SH 1000A/60mV	1000A/60mV
M7123H.	SH 1200A/60mV	1200A/60mV
M7123J.	SH 1500A/60mV	1500A/60mV
M7123K.	SH 2000A/60mV	2000A/60mV
M7123L.	SH 2500A/60mV	2500A/60mV
M7123M.	SH 3000A/60mV	3000A/60mV
M7123N.	SH 4000A/60mV	4000A/60mV
M7123P.	SH 5000A/60mV	5000A/60mV
M7123Q.	SH 6000A/60mV	6000A/60mV
M7123R.	SH 7500A/60mV	7500A/60mV
M7123T.	SH 10000A/60mV	10000A/60mV
M7123V.	SH 15000A/60mV	15000A/60mV
M7123Z.	SH 18000A/60mV	18000A/60mV

 $\textbf{SHP}\!: \textit{Faston connection}; \textbf{SHB}\!: \textit{Insulating base socket} (\textit{up to 100 A}); \textbf{SH}\!: \textit{Without base}$ 

For other configurations see additional performance table. All shunts are supplied with 1.5 m long cables with a 1.5  $\rm mm^2$  cross-section



Page 4 of 4






## SHB 2.5A/60mV


Shunts

Code: M71223.

#### **Dimensions**

	Range A <sub>ro</sub>	Fig.	a1	a2	b1	b2	b3	c1	c2	e	h	N° Current connections	Current connections			
Voltage drop mV <sub>(1)</sub>													Hexagonal screws DIN 933	Washer DIN 125	DIN 934 nut	Voltage connections
60	1-1 , 5-2, 5-4-6-10-15-25	1	90	28	20		-	8	-	78	-	2 x 1	M5 x 12	5,3	-	2 Screws M5 x 8 DIN 84 & 2 Washer 5.3
	30-40-60-100-150		100	33	20	-	-	8		80	-	2 x 1	M8 x 16	8,4	-	
	250		145	55	30	15		10	10	105	30	2 x 1	M12 x 40	13	M12	
	400-600	2	145		40	20	-	10				2 x 1	M16 x 45	17	M16	
	800		165	65	60	30	-	10	10	115	30	2 x 1	M20 x 50	21	M20	
	1500				90	21	48					2 x 2	M16 x 45	17	M16	
	2500				120	30	60	10	10	115	30	2 x 2	M20 x 50	21	M20	
150	1-1 , 5-2 , 5-4-6-10-15-25	1	90	25	20	-	-	8		78	-	2 x 1	M5 x 12	5,3	-	DIN 433
	40-60-100-150		225	33	25	-	-	8	-	205	-	2 x 1	M8 x 16	8,4	-	
	250	2	270	55	30	15		10	10	230	50	2 x 1	M12 x 40	13	M12	
	400-600				40	20	-	10	10			2 x 1	M16 x 45	17	M16	
	800		290	65	70	35	-	10	10	240	60	2 x 1	M20 x 50	21	M20	

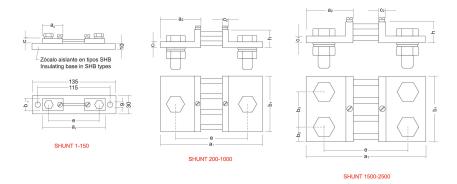



# Units: (A) 30 0.7 0.7 0.7 1.25 1.25 1.25 60 75

SHP xxxA / 60 mV