

CBS-4 RA

CBS-4 RA, Central residual current protection

Code: P24911.

> N° relays: 4
> IΔn (A): 0,03 ... 30 A
> Delay: 0,02...10 s, INS, SEL
> Nr. reclosures: Programmable
> Breaking element: Contactor
> Type of protection: Type A

Description

Unit equivalent to 4 residual current protection relays. 4 independent programmable relays available

4 inputs to connect the external toroidal transformers of the **WG / WGS / WGC**

Self-reclosing with programmable residual current trip in each channel

Superimmunized Type A relay with high frequency current filtering and high immunity. Monitoring in true root mean square (TRMS)

Reduced size: 3 modules

5 independent programmable outputs:

- 4 residual current trip outputs
- 1 end-of-reclosing-sequence interlocking output

Backlight display to show the information of the 4 channels:

- Adjustment values
- Instantaneous leakage current

Trip/external reset input

Automatic test of the connection and status of each external transformer

Optional RS-485 Communications: type **CBS-4C RA** and **CBS-4C RAL**

Assembly on DIN rail 46277 (**EN-50022**)

Optional assembly on 72 x 72 panel with accessory **M5ZZF1**.

Application

CBS-4 RA or CBS-4 RAL allow an intelligent residual current protection, with greatly reduced dimensions. A contactor is available per channel, enabling the automatic reclosure after a trip, thus offering the most adequate solution for public lighting, cash machines, refrigeration chambers, traffic lights, etc. In addition, version CBS-4 C, with RS-485 communications, is used with the Power Studio software and it adds the centralised supervision in real-time, as well as a record log that can be analysed later on.



CBS-4 RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24911.

Specifications

AC power supply

Consumption	6 VA
Frequency	50/60 Hz
Nominal voltage	230 V~ (± 20 %)

Mechanical characteristics

Size (mm) width x height x depth	52.5 x 85 x 67.9 (mm)
Envelope	Polycarbonate V0
Fastening	DIN (IEC 60715)
Weight (kg)	0,256

Environmental characteristics

Protection class	IP 41 (front), IP 20 (side and rear cover)
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-20 ... +55 °C
Working temperature	-10 ... +50 °C

Varistor characteristics

Maximum voltage	275 V~

External reset input for tripping

Type	Optocoupled
Maximum power	0,7 W
Maximum voltage	230 V~ ±20 %

Standards

Electrical safety, Maximum height (m)	2000
Standards	IEC 60947-2-M, IEC 62020, IEC 61008-1

User interface

LED	2
Keyboard	7 keys
Display type	LCD

Digital relay outputs

Nominal load in AC1	1500 VA
Nominal current	6 A ~
Nominal voltage	230 V ~



CBS-4 RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24911.

Maximum current	10 A ~

Differential protection

Type	Type A ultra-immunised
Sensitivity (IΔn), A	0,03 ... 30
Delay time (tΔ)	Programmable: 0.02 ... 10s Inverse curve: Instantaneous or selective
Transformer	External, WG (WG/WGS/WGC) series

Protection

Measure	True root mean square (TRMS)
Circuit breaker type	Contactor

CBS4-RA
Type A ultraimmunized 4 channels residual current relay with reconnection

CODE	TYPE	IΔn (A)	Breaking element
P24911.	CBS-4 RA	0,03 ... 30 A	Contactor
P24912.	CBS-4C-RA	0,03 ... 30 A	Contactor

Requires an residual current transformer, WGC type (not included). The breaking element to be associated must be a contactor not included.
To encode other parameters, see the table at the end of the section

Creation date: 22/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.




CBS-4 RA

Multipoint residual current system for measurement and signalling with external transformer of the WGS / WGS series

Code: P24911.

Dimensions

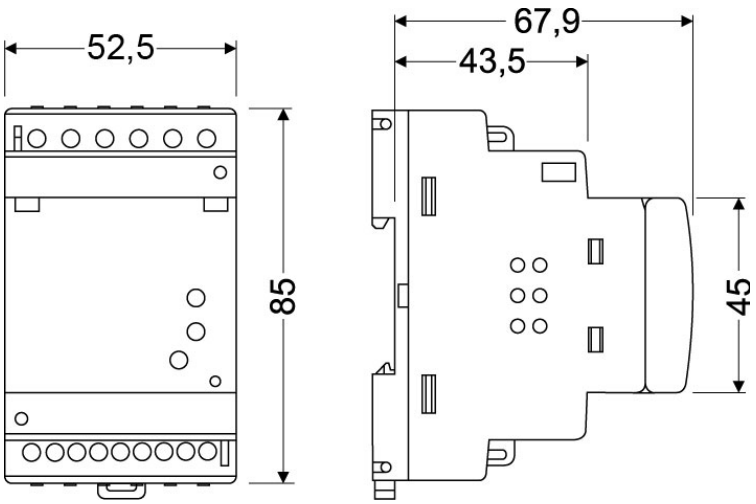

Connections

