

REC4-EV-4P-63-30

REC4-EV-4P-63-30, Type A+6mAdc RCCBB with reclosing for EV chargers

Code: P26H01.

> Poles: 4
> In (A): 63 A
> Reclosing mode: Time
> Sensitivity: 30 mA
> Type of protection: Type A

Specifications

AC power supply

Installation category	CAT III 300 V
Consumption	5 VA
Frequency	50/60 Hz (± 5 %)
Nominal voltage	230 V ~ (± 15 %)

Electrical characteristics

Electrical lifetime	2000 cycles

Mechanical characteristics

Size (mm) width x height x depth	91 x 101.55 x 81 (mm)
Envelope	Plastic V0 polycarbonate
Fastening	DIN rail
Weight (kg)	0,4

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-35 ... +65 °C
Working temperature	Earth leakage protection: -25 ... +55 °C Reclosing: -10 ... +55 °C

Current measurement circuit

Nominal current (In)	63 A

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V ~
Electrical safety, Contamination level/class	Pollution resistance 2
Standards	UNE-EN 61008-1, UNE-EN 50557

Circuit breaker / RCCB

Rated conditional short-circuit current (Inc)	10 kA
Nominal current (In)	63 A
Assigned frequency (Hz)	50



REC4-EV-4P-63-30

Code: P26H01.

Rated breaking and re-closure capacity (Im)	630 A
Rated nominal voltage (Un)	400 V ~

Differential protection

Sensitivity (IΔn), A	0,03 / 6 mAdc

Reclosure type

Reclosure number	3
Reclosure time	< 3/20/180 s

REC4-EV
RCCB with supervision and self-reclosing 6mAdc, type A

CODE	TYPE	Poles	In (A)	Reclosing mode
P26H00.	REC4-EV-4P-40-30	4	40 A	Time
P26H01.	REC4-EV-4P-63-30	4	63 A	Time

3 reconnections: 3, 20, 180 s. Complies with the EN 50557 Standard


Creation date: 23/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



REC4-EV-4P-63-30

Code: P26H01.

Dimensions

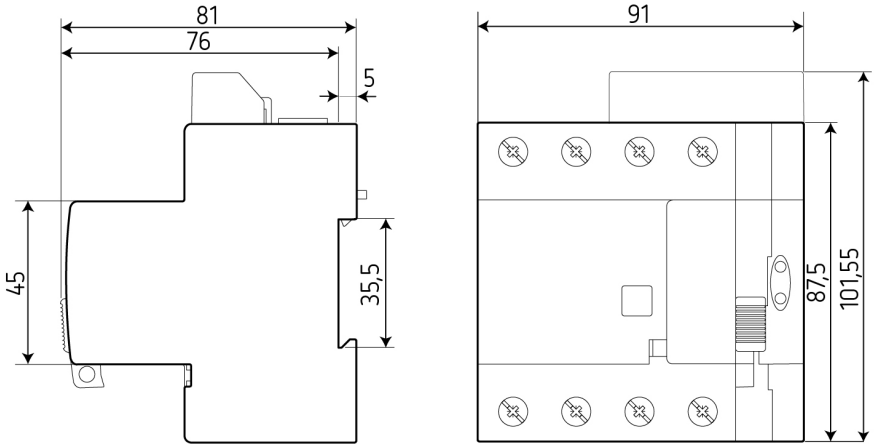

Creation date: 23/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.