

RECB-EV-C-4P-63-30

RECB-EV-C-4P-63-30, RCCB with self-reclosing system, type B

Code: P26M10.

> Poles: 4
> In (A): 63 A
> Reclosing mode: remote control
> Sensitivity: 30 mA
> Type of protection: Type B

Description

RECB-EV-C is a type-B RCCB for single or three-phase installations intended for charging electric vehicles, linked to a reclosing motor, which enables safe reclosing of the corresponding RCCB. The reconnection system or mode of this device is via remote input. The device has an additional input for a remote trip, and an output indicating the status of the switch

Application

Device designed to provide residual current protection with reclosing system, intended for electric vehicle charging stations.

Creation date: 30/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



RECB-EV-C-4P-63-30

Reclosing type-B RCCB

Code: P26M10.

Specifications

AC power supply

Frequency	50 Hz

DC power supply

Consumption	6 W
Nominal voltage	12Vdc (± 10 %)

Electrical characteristics

Electrical lifetime	2000 cycles

Mechanical characteristics

Size (mm) width x height x depth	91 x 100 x 81 (mm)
Envelope	Plastic V0 polycarbonate
Fastening	DIN rail
Weight (kg)	0,6

Environmental characteristics

Protection class	IP20
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-40 ... +70 °C
Working temperature	Earth leakage protection: -25 ... +65 °C Reclosing: -10 ... +70 °C

Current measurement circuit

Nominal current (In)	63 A

Digital inputs

Input impedance	4.4 KΩ
Quantity	2
Maximum open circuit voltage	24 Vdc

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III
Electrical safety, Contamination level/class	Pollution resistance 2
Standards	IEC 62423, IEC 61010-1, IEC 63024

User interface

LED	2 LED

Creation date: 30/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



RECB-EV-C-4P-63-30

Reclosing type-B RCCB

Code: P26M10.

Circuit breaker / RCCB

Rated conditional short-circuit current (Inc)	10 kA
Nominal current (In)	63 A
Assigned frequency (Hz)	50
Rated breaking and re-closure capacity (Im)	630 A

Digital transistor outputs

Quantity	1
Type	Optocoupler
Maximum voltage	24 V dc

Differential protection

Sensitivity (IΔn), A	0,03 / 30 mAdc

RECB-EV-C
RCCB with reclosing, type B

CODE	TYPE	Poles	In (A)	Reclosing mode
Reclosing RCCB with status output				
P26M00.	RECB-EV-C-4P-40-30	4	40 A	remote control
P26M10.	RECB-EV-C-4P-63-30	4	63 A	remote control

Creation date: 30/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.





RECB-EV-C-4P-63-30

Reclosing type-B RCCB

Code: P26M10.

Dimensions

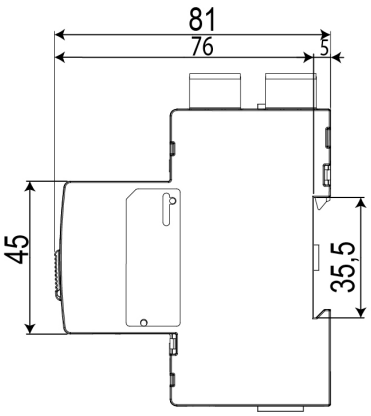

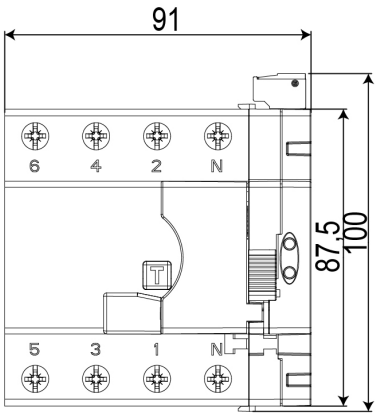

Creation date: 30/10/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.