



WI/010-30

WI/010-30, Current relay

Code: P32012. **CONSULTAR DISPONIBILIDAD**

- > Trip time (adjustable): 0,5 ... 30 s
- > Margin of setting (adjustable): 1 ... 10 A

Description

The **WI** current detectors are electronic devices with an output relay that is connected or disconnected, in accordance with the level of current detected in the circuit.

- The trip level is adjusted with the potentiometer on the front of the unit.
- The reset process is automatic with currents under 10% of the trip level (Hysteresis).
- Delay: the connection and disconnection times of the output relay can be adjusted separately.
- Measurement of the current, depending on the type:
 - With built-in current transformer (net diameter \varnothing 25 mm)
 - Separate transformer, input.../5 A ~

Application

WI's can be used in any application that needs to control the load:

- Power supply units for grinders or aggregate grinding units.
- Loads in extrusion machines
- Pump control
- Load on motors, etc.



WI/010-30

Current detector control relay

Code: P32012.

Specifications

AC power supply

Frequency	50 Hz
Nominal voltage	220-240 V~ (-15%, +10%)

Mechanical characteristics

Size (mm) width x height x depth	70 x 87 x 75 (mm)
Weight (kg)	0,13

Voltage measurement circuit

Insulation voltage	2,5 kV
--------------------	--------

Digital relay outputs

AC11 Ie/Ue	0,8 A / 240 V~
DC11 Ie/Ue	1,6 A / 30 Vdc
Thermal current (Ith)	5 A
Insulation voltage	250 V ~
Electrical life	1 x 10 ⁵
Mechanical life	2 x 10 ⁶

Differential protection

Sensitivity (IΔn), A	1 ... 10
Delay time (tΔ)	0,5 ... 30 s




WI/010-30

Current detector control relay

Code: P32012.

Dimensions

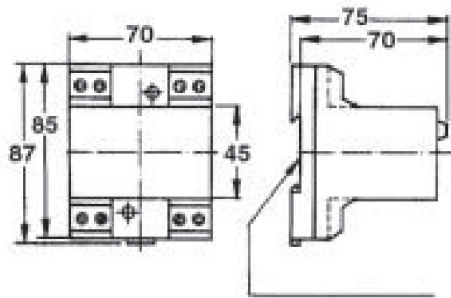

DIN 46277 (EN 50022)
FIJACIÓN / FIXING

Connections

