

# CEM-C21-T1-MID

CEM-C21-T1-MID, Direct three-phase energy meter with MID certificate

Code: Q22412. **CONSULTAR DISPONIBILIDAD**

> Módules: 4
> Tariff: 1
> Certification: MID
> Transistor output: 1
> System: Three-phase
> Measure: Direct
> Measurement Range (V): 3 x 127/220...3 x 230/400
> Measurement Range (A): 5 (65) A
> Max. Current (A): 65

## Description

Three-phase electrical energy meter with indirect measurement, 5(10)A (, CEM-C31), direct measurement 65 A (CEM-C21) or single-phase energy meter (CEM-C10).
Built-in LCD display (7 digits) with rotating screen system. It can have integrated RS-485 communications, depending on the model.. Also features
2 buttons (1 sealable button) for viewing all the measured information.
Other features include:

- MID certification, module B+D (depending on the type)
- Class 1 active energy (Class B, in accordance with MID), Class 2 reactive energy
- Complies with the EN 50470 (MID European standards) or IEC 62052-11 standards (international standards), depending on the type.
- Compact size (CEM-C10: 2 modules, 36 mm, CEM-C21 y CEM-C31: 4 modules, 72 mm)
- Resettable partial meter
- 1 programmable impulse output, in accordance with DIN 43864 (CEM-C10, CEM-C31-T1, CEM-C21-T1 models)
- 1 Digital input for Tariff selection and impulse count (CEM-C31-D, CEM-C21-DS)
- Indicates bad connections on the screen
- Energy storage, even in the case of bad connections

## Application

- Redundant meter for verifying the energy allocated by the energy provider.
- Energy consumption report sent to a remote system (PLC/BMS).
- Cost control for achieving a high consumption/unit ratio in industrial processes.
- Display of electrical parameters (V, A, kW, kW·h, PF, etc.), per phase and three-phase.



# CEM-C21-T1-MID

Energy meter for DIN rail mounting

Code: Q22412.

## Specifications

### AC power supply

| | |
|---|---|
| Installation category | CAT III 300 V |
| Consumption | < 2 W, 10 VA |
| Frequency | 50 ... 60 Hz |
| Nominal voltage | 230 V / 400 V ~ (± 20 %) |

### Mechanical characteristics

| | |
|---|---|
| Size (mm) width x height x depth | 70 x 90 x 64 (mm) |
| Weight (kg) | 0,38 |

### Environmental characteristics

| | |
|---|---|
| Relative humidity (without condensation) | 5 ... 95 % |

### Current measurement circuit

| | |
|---|---|
| Consumption | 0.3 VA ... 10 A |
| Reference current (Iref) | 5 A |
| Maximum current | 65 A |
| Minimum current measurement | 0.250 A |
| Transition current | 0.500 A |

### Voltage measurement circuit

| | |
|---|---|
| Consumption | < 2W , < 10VA (In, Vref) |
| Nominal frequency | 50 / 60 Hz |
| Nominal voltage | 3 x 127/220 ... 3 x 230/400 V ~ |

### Electrical characteristics

| | |
|---|---|
| Insulation voltage, circuit | 4 kV RMS 50 Hz durante 1 min |

### Standards

| | |
|---|---|
| Electrical safety, Maximum height (m) | 2000 |
| Standards | EN 50470-1, EN 50470-3, IEC 62053-21, IEC 62053-23 |

### User interface

| | |
|---|---|
| LED | 2 LED: kWh, 4000 imp/kW, kvarh, 4000 imp/kvarh |
| Keyboard | 2 Keys |
| Display type | LCD |
| Maximum value | 999999.9 kWh |



Creation date: 29/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



# CEM-C21-T1-MID

Energy meter for DIN rail mounting

Code: Q22412.

**Digital transistor outputs**

| | |
|---|---|
| Quantity | 1 |



Creation date: 29/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



# CEM-C21-T1-MID

Energy meter for DIN rail mounting

Code: Q22412.

| | |
|---|---|
| Type | Optocoupler |
| Pulse output, time period (Ton / Toff) | Ton: 40 ms |
| Maximum current | 50 mA |
| Maximum voltage | 24 Vcc |

## Measurement accuracy

| | |
|---|---|
| Reactive energy measurement (kvarh) | Class 2.0 (IEC 62053-23) |
| Active energy measurement (kWh) | Class B (EN 50470) |

## Wireless communication

| | |
|---|---|
| Technology / Type | Optical IR port (additional external receiver required) |

CEM-C10 and CEM-C21/C31 without built-in RS-485 communications can optionally communicate with CEM-M-ETH and CEM-M-RS485 modules.
Devices with absolute measurements (Abs). For 2 or 4 quadrants, see the Aditional table
Frecuency: 50/60 Hz. Parameters: V, A, kW, kVA, kWh, cos phi

CEM-XXX-TI encoding table - Devices with pulse output (transistor)
CEM-XXX-DS-Devices with digital input for tariff change and impulse meter



Creation date: 29/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



# CEM-C21-T1-MID

Energy meter for DIN rail mounting

Code: Q22412.

## Dimensions

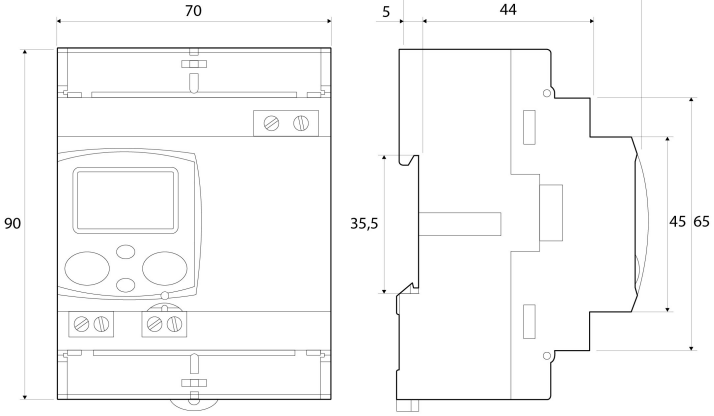


## Connections

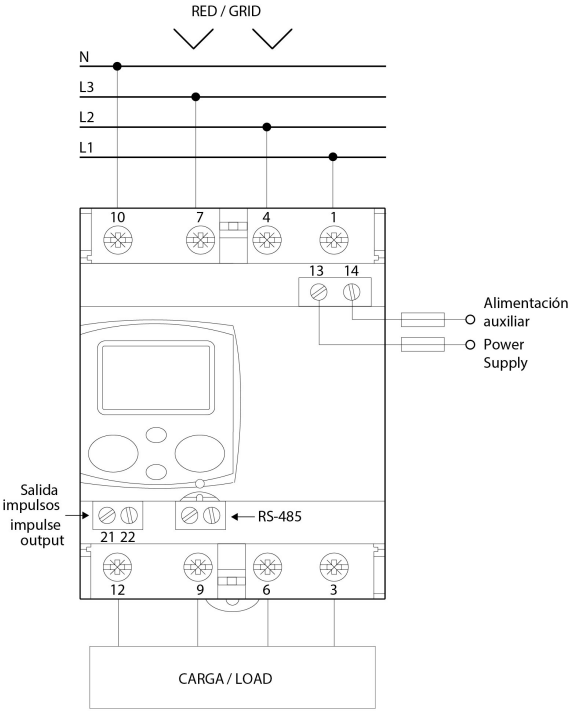




Creation date: 29/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.