



## CEM-D211

CEM-D211, Direct three-phase energy meter

Code: Q22611.

- > Protocol: Modbus/RTU
- > Módulos: 4
- > Certification: IEC
- > Communications: RS-485
- > Digital inputs: 2
- > System: Three-phase
- > Measure: Direct
- > Measurement Range (V): 3x127(230)...3x230(400)V
- > Measurement Range (A): (5) 100A

### Description

Three-phase electrical energy meter with direct measurement up to 100 A (depending on model), featuring sealable terminals and optional communication via Modbus RS-485 and M-BUS protocols (depending on model).

Main features include:

- MID certification, modules B+D (depending on model).
- Class 1 for active energy (Class B as per MID), Class 2 for reactive energy.
- Compliant with EN 50470 (European MID standard) or IEC 62052-11 (international standard), depending on the model.
- Compact size (4 DIN rail modules).
- Resettable partial energy counter.
- 1 programmable pulse output (depending on model).
- 1 digital input for tariff control and pulse counting (depending on model).
- Time-of-use tariff calendar.
- Modbus RS-485 and M-BUS communications (depending on model).
- Display of basic electrical parameters (V, A, kW, kWh, PF, etc.).

### Application

- Meter for energy sub-metering.
- Applications where certified MID meters are required for energy verification and billing.
- Meter used to verify the energy invoiced by the electricity distributor.
- Energy consumption reporting and connectivity with SCADA systems.
- Energy and cost control in industrial processes.



## CEM-D211

Three-phase electricity meter with direct measurement up to 100A

Code: Q22611.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	< 0.5 W, < 2 VA
Frequency	50 ... 60 Hz
Nominal voltage	3 x 127/220 ... 3 x 230/400 V ~ ± 20 %

#### Mechanical characteristics

Size (mm) width x height x depth	71,5 x 90 x 74 (mm)
Envelope	PC+ABS
Fastening	DIN rail (IEC 60715)
Weight (kg)	0,38

#### Environmental characteristics

Protection class	IP 51 (instaled) IP 40 (terminal area)
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-40 .. +85 °C
Working temperature	-40 ... +70 °C

#### Current measurement circuit

Consumption	< 1 VA
Reference current (Iref)	5 A
Minimum current measurement	0.250 A
Transition current	0.500 A

#### Voltage measurement circuit

Nominal voltage	3 x 127/220 ... 3 x 230/400 V ~ ± 20 %
-----------------	--

#### User interface

LED	2 LED: kWh: 4000 imp/kWh, kvarh: 4000 imp/kvarh
Keyboard	2 Keys
Display type	LCD
Maximum value	4294967 kWh

#### Digital inputs

Quantity	2
Type	Potential free contact

#### Standards



## CEM-D211

Three-phase electricity meter with direct measurement up to 100A

Code: Q22611.

### Standards

IEC-62053-21; IEC 62053-23; IEC 62053-52; IEC 62052-11; UNE-EN 50470-3; MID (EU Directive 2014/32/EU on Measuring Instruments Annex II, Module B)

### Measurement accuracy

Reactive energy measurement (kvarh)	Class 2 (IEC 62053-23)
Active energy measurement (kWh)	Class 1 (IEC 62053-21)

### Serial communication

Protocol	Modbus/RTU
----------	------------

### CEM-D200

Three-phase direct energy meter up to 100A

CODE	TYPE	Measurement Range (V)	Measurement Range (A)	Transistor output	Certification	Módulos	Digital inputs	Communications	Protocol
<b>Direct three-phase</b>									
Q22601.	CEM-D210	3x127(230)...3x230(400)V	(5) 100A	1	IEC	4			
Q22602.	CEM-D210 -MID	3x127(230)...3x230(400)V	(5) 100A	1	MID	4			
Q22611.	CEM-D211	3x127(230)...3x230(400)V	(5) 100A		IEC	4	2	RS-485	Modbus/RTU
Q22612.	CEM-D211 -MID	3x127(230)...3x230(400)V	(5) 100A		MID	4	2	RS-485	Modbus/RTU
Q22621.	CEM-D212	3x127(230)...3x230(400)V	(5) 100A		IEC	4	2		MBUS
Q22622.	CEM-D212 -MID	3x127(230)...3x230(400)V	(5) 100A		MID	4	2		MBUS




# CEM-D211

Three-phase electricity meter with direct measurement up to 100A

Code: Q22611.

## Dimensions

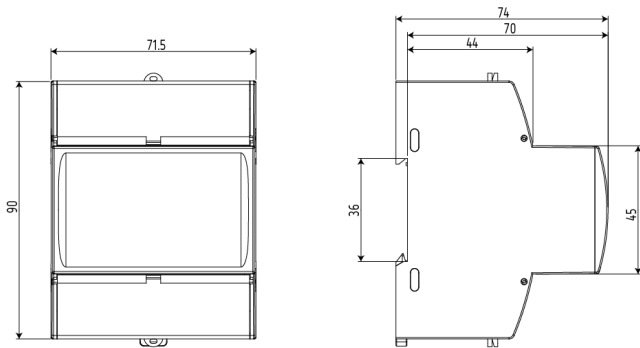

## Connections

### 3Ph-4W



### 3Ph-3W

