



CEM-C31-T1, Indirect three-phase energy meter

Code: Q23511.

> Módules: 4

> Tariff: 1

> Certification: IEC > Transistor output: 1

> System: Three-phase

> Measure: Indirect

> Measurement Range (V): 3 x 57/100...3 x 230/400

> Measurement Range (A): .../ 5 (10) A

> Max. Current (A): 10

Description

Three-phase electrical energy meter with indirect measurement, 5(10)A (, CEM-C31), direct measurement 65 A (CEM-C21) or single-phase energy meter (CEM-C10).

Built-in LCD display (7 digits) with rotating screen system. It can have integrated RS-485 communications, depending on the model.. Also features

2 buttons (1 sealable button) for viewing all the measured information.

Other features include:

- o MID certification, module B+D (depending on the type)
- o Class 1 active energy (Class B, in accordance with MID), Class 2 reactive energy
- o Complies with the EN 50470 (MID European standards) or IEC 62052-11 standards (international standards), depending on the type.
- o Compact size (CEM-C10: 2 modules, 36 mm, CEM-C21 y CEM-C31: 4 modules, 72 mm)
- o Resettable partial meter
- $\circ~$ 1 programmable impulse output, in accordance with DIN 43864 (CEM-C10, CEM-C31-T1, CEM-C21-T1 models)
- o 1 Digital input for Tariff selection and impulse count (CEM-C31-D, CEM-C21-DS)
- o Indicates bad connections on the screen
- o Energy storage, even in the case of bad connections

Application

- o Redundant meter for verifying the energy allocated by the energy provider.
- o Energy consumption report sent to a remote system (PLC/BMS).
- o Cost control for achieving a high consumption/unit ratio in industrial processes.
- O Display of electrical parameters (V, A, kW, kW·h, PF, etc.), per phase and three-phase.







Energy meter for DIN rail mounting

Code: Q23511.

Specifications

CAT III 300 V
2.17.42.17
< 2 W, 10 VA
50/60 Hz
230 V ~ (± 20 %)
70 x 90 x 64 (mm)
0,37
5 95 %
0.3 VA 10 A
5 A
10 A
0.050 A
0.25 A
< 2W , < 10VA (In, Vref)
50 / 60 Hz
3 x 127/220 3 x 230/400 V ~
4 kV RMS 50 Hz durante 1 min
2000
EN 50470-1, EN 50470-3, IEC 62053-21, IEC 62053-23, EN 62056-21
2 LED: kWh, 20000 imp/kW, kvarh, 20000 imp/kvarh
2 Keys
LCD
999999.9 kWh











Energy meter for DIN rail mounting

Code: Q23511.

Digital transistor outputs

Quantity 1







Energy meter for DIN rail mounting

Code: Q23511.

Pulse output, time period (Ton / Toff)	Ton: 200 ms						
Maximum current	50 mA						
Maximum voltage	24 Vcc						
Measurement accuracy							
Reactive energy measurement (kvarh)	Class 2.0 (IEC 62053-23)						
Active energy measurement (kWh)	Class 1 (IEC 62053-21)						
Serial communication							
Protocol	Modbus RTU						
Wireless communication							

Optical IR port (additional external receiver required)

CEM-C

Energy meter

Technology / Type

CODE	TYPE	Measurement Range (V)	Measurement Range (A)	Communications	Protocol	Transistor output	Digital inputs	Tariff	Certification			
Indirect three-phase												
Q23511.	CEM-C31-T	1 3 x 57/1003 x 230/400	/ 5 (10) A	-	-	1	-	1	IEC			

CEM-C10 and CEM-C21/C31 without built-in RS-485 communications can optionally communicate with CEM-M-ETH and CEM-M-RS485 modules. Devices with absolute measurements (Abs). For 2 or 4 quadrants, see the Aditional table Frecuency: 50/60 Hz. Parameters: V, A, kW, kVA, kWh, cos phi

CEM-XXX-TI encoding table - Devices with pulse output (transistor)
CEM-XXX-DS-Devices with digital input for tariff change and impulse meter









Energy meter for DIN rail mounting

Code: Q23511.

Connections Dimensions



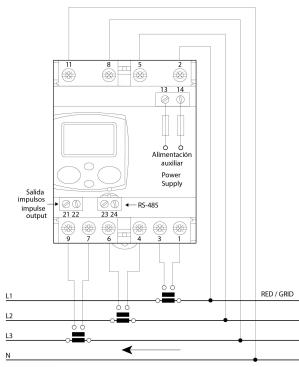

CARGA/LOAD

