



TRMC-X3 400/5 Ext

TRMC-X3 400/5 Ext, Current transformers

Code: Q301T4010E000

> Usefull diam.(mm): 38

> Cable (m): 7

> Class 0,5S Power (VA): 2,5

> Measurement Range (A): 300/5

Specifications

Frequency	50 / 60 Hz	
lectrical characteristics		
Safety factor (SF)	5	
Power	2,5 5 VA	
Insulation voltage, circuit	3 kV	
lechanical characteristics		
Size (mm) width x height x depth	245 x 80 x 98.5 (mm)	
Envelope	Self-extinguishing V0 plastic, filled with synthetic resin	
Connection type	Three-phase busbar, cable length 1.5 m	
Weight (kg)	2,2	
nvironmental characteristics		
Thermal Class	class B (+130 °C)	
Relative humidity (without condensation)	5 95 %	
Installation, location, position.	Inside	
Storage temperature	-15 +50 °C	
Working temperature	-5 +40 °C	
pecific technical characteristics of current sensors		
Operating voltage	0,72 kV~ máx.	
tandards		
Certifications	UL 94	
Electrical safety, Maximum height (m)	1000	
Standards	IEC 61869-2, IEC 60038, IEC 60071-1, IEC 60071-2, IEC 60721-3-3, IEC 60085, EN 60076-5, UNE 21-305-90, UNE-EN 60695-2-10, UNE-EN 60695-2-11, UL 94	
urrent measurement circuit		
Primary current measurement	400 A	
Dynamic current (Idyn)	2,5 lth	
Thermal short-circuit current (Ith)	60 In	
Transformation ratio	/ 5 A	







TRMC-X3 400/5 Ext

Code: Q301T4010E000

TRMCx3

Three-phase current transformers for energy meters

ТҮРЕ	
TRMC-X3 100/5 Ext	
TRMC-X3 200/5 Ext	
TRMC-X3 300/5-Ext	
TRMC-X3 400/5 Ext	
	TRMC-X3 100/5 Ext TRMC-X3 200/5 Ext TRMC-X3 300/5-Ext









TRMC-X3 400/5 Ext

Code: Q301T4010E000

Dimensions Connections

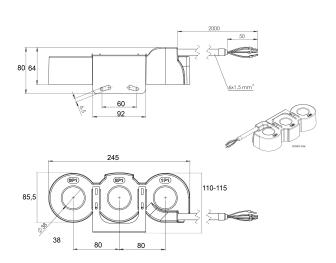

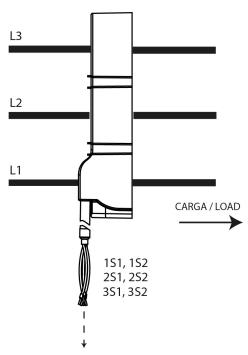

Equipo de medida / Measuring device