Kit CAP CDY 400A

Kit CAP CDY 400A, Low voltage,

Code: Q32801.

Description

T-SABT is the analyser that allows the three-phase voltage and current of a line to be measured to transmit the data, using RS-485, to the R-SABT advanced low-voltage monitor. The device can be installed on the sensor (CAP), located at the output of the low-voltage switchboard in the transformer substation, or in a specially designed cabinet.

Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

Kit CAP CDY 400A

Advanced low-voltage monitoring card

Code: Q32801.

Specifications

DC power supply

Installation category	CAT IV 300 V
Consumption	0.3 W
Nominal voltage	24 V

Environmental characteristics

Protection class	IP 2XB
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-25 ... +70 °C
Working temperature	-10 ... +70 °C

Mechanical characteristics

Envelope	V0 self-extinguishing plastic

Current measurement circuit

Installation category	CAT IV 300 V
Nominal current (In)	1 A
Minimum current measurement	1 mA

Voltage measurement circuit

Installation category	CAT IV 300V
Input impedance	> 800 kΩ
Voltage measuring range	127/220 ... 230/400 V ~ ± 20 %
Maximum input voltage consumption	0.07 VA
Minimum measurement voltage (Vstart)	20 V ~

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT IV 300 V
Standards	UNE-EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

User interface

LED	4 indication LED

Measurement accuracy

Phase current measurement	1%
Reactive energy measurement (kvarh)	Class 2
Active energy measurement (kWh)	Class B
Phase voltage measurement	1%

Kit CAP CDY 400A

Advanced low-voltage monitoring card

Code: Q32801.

Serial communication

Protocol	DLMS
Technology / Type	RS-485

Kit T-SABT
Advanced Low-voltage Monitoring Cards

CODE	TYPE
Exit Kits	
Q32803.	Kit CAP JNM_PNZ 400A
Q32802.	Kit CAP PRO_ORM 400A
Q32801.	Kit CAP CDY 400A
Q32810.	Kit TQ
Q32820.	Kit Rogowski

Creation date: 15/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

Kit CAP CDY 400A

Advanced low-voltage monitoring card

Code: Q32801.

Dimensions

T-SABT

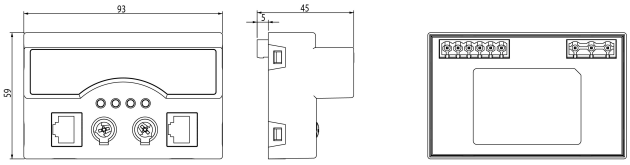
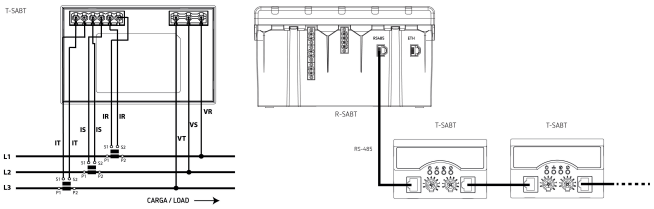
Connections