



212-ES4A-BFB17

212-ES4A-BFB17, Single-phase energy meters with PLC system (measuring, load profiling, multi configurable billing calendar)

Code: QB3C3M10

- > Type Consumer: 5
- > Discon. relay: Yes
- > Communications: PRIME
- > N° relays: 1
- > Class (Active/Reactive): B (1) / 2
- > System: Single-phase
- > Measure: Direct
- > Measurement Range (V): 230
- > Measurement Range (A): 10 (60)
- > Quadrants: 4
- > Frequency (Hz): 50
- > Hourly discrimination: 2.0DHA / 2.1DHA

Description

CIRWATT B is a multi-function digital single-phase meter, Class B in active energy and Class 2 in reactive energy. The meter complies with European legislation related to energy meters (MID) **EN 50470-1** and **EN 50470-3**, which approves the installation of these meters in any country of the European Union.

It includes PLC / PRIME (Power Line Carrier) Communications through power cable and an optical communications port. Both use **DLMS** protocol. In addition, it can display information in case of power loss just pressing the button, it can store up to 6 channels of energy registers with 3 months of hourly load profile and it can limit maximum power consumed by end-user, through an internal disconnection relay which can be remotely managed using PLC communications

Application

The main application of the **CIRWATT B** meter is the metering of active and reactive energy for billing purposes, whenever a meter with high performance features is required at an optimised cost. PLC communications can be used for the remote download of all data recorded by the meter through a **PLC-1000** concentrator or any other PRIME concentrator.

The circuit breaker integrated in the meter can be used to manage the supply remotely, opening/closing the circuit breaker and programming the hired power above a value that will activate the circuit breaker, opening it and reclosing it to guarantee the safety for the final user



212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M10

Specifications

AC power supply

Tolerance	80 % ... 115 % Un
Consumption	< 2 W; < 10 VA
Frequency	50 ... 60 Hz
Nominal voltage	110 ... 230 V (80 ... 115 %)

Mechanical characteristics

Size (mm) width x height x depth	172 x 206 x 67 (mm)
Envelope	DIN 43859
Weight (kg)	0,74

Environmental characteristics

Relative humidity (without condensation)	95 % max.
Storage temperature	-40 ... +85 °C
Working temperature	-40 ... +70 °C

Voltage measurement circuit

Connection	Asymmetrical
Consumption	< 2 W; 10 VA
Nominal frequency	50 / 60 Hz
Nominal voltage	230 V

Current measurement circuit

Consumption	0,024 VA @ 10 A
Reference current (Iref)	10 A
Maximum current	60 A
Minimum current measurement	25 mA

Communications

Type	PRIME
------	-------

Optical communication interface

Hardware	IEC 62056-21
Protocol	DLMS
Type	Serial;bi-directional

User interface

Resolution of the display	up to 6 digits (9 mm)
---------------------------	-----------------------



212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M10

Display type	LCD
Memory	
Memory capacity	Data: non-volatile memory, Setup and events: serial-flash
Write time	90 days
Type	Serial flash
Internal battery	
Type	Lithium
Useful life	> 20 years @ 30 °C
PLC	
Hardware	CENELEC A
Protocol	DLMS / PRIME
Modulation system	OFDM with repeater system
Measurement accuracy	
Reactive energy measurement (kvarh)	UNE-EN 62053-21 (Class 2)
Active energy measurement (kWh)	EN 50470 (Class B) IEC 62053-21 (Class 1)
Features / performance	
Billing closures	12 locks per contract. Programmable date and hour
Load curve	1 load curves, programmable integration time (1 ... 60 min)
Tariff programming	12 days 24 types of data 6 types of tariffs 30 public holidays
Clock	
Source	Temperature compensated oscillator
Accuracy (EN 61038)	< 0,5 s / day
Type	Gregorian calendar

CIRWATT B II PRIME

Single-phase energy meters with PLC system (measuring, load profiling, multi configurable billing calendar)

CODE	TYPE	Communications	N° relays	Class (Active/Reactive)	Measure	Measurement Range (V)	Measurement Range (A)	Discon. relay	Hourly discrimination
CIRWATT B 200RCP									
QB3C3M10	212-ES4A-BFB17	PRIME	1	B (1) / 2	Direct	230	10 (60)	1	2.0DHA / 2.1DHA




212-ES4A-BFB17

Single-phase active and reactive energy meter with internal disconnection relay

Code: QB3C3M10

Dimensions

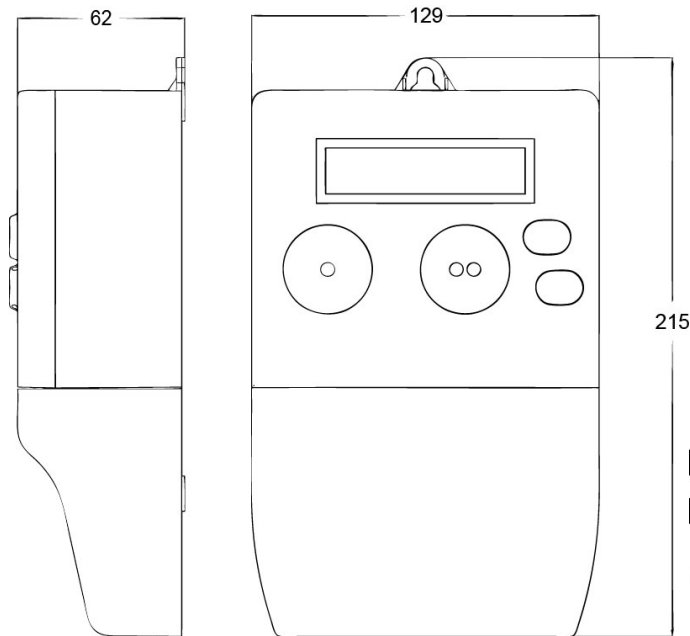

Connections

