

CLZ-FP-60/12,5-60Hz-HD

CLZ-FP-60/12,5-60Hz-HD, Three-phase tubular power capacitor 60 Hz

Code: R2H68B. **CONSULTAR DISPONIBILIDAD**

> Terminal: A
> Frequency (Hz): 60
> kvar (600 V): 12,5
> Cover (opc.): 1
> Use voltage (V): 600

Description

CLZ-HD (Heavy duty) capacitor range is composed of capacitors with a tubular casing, of the dry-type, covering a wide range of power and voltage ratings, at 50 and 60 Hz. The CLZ-HD capacitors are designed to be installed in installations with extreme working conditions. The design, manufacturing and testing processes guarantee the production of top quality and long lasting capacitors. Those CLZ-HD capacitors offer a new refrigeration technology by means of nitrogen gas*, being a refrigerating system of high benefits, inert and non flammable.

Application

Its application is based on compensation in installations with static or variable loads (capacitor banks). Especially designed to be installed in roughly environments with the most extreme conditions due to its longer life and high temperature resistance.

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



CLZ-FP-60/12,5-60Hz-HD

Code: R2H68B.

Specifications

AC power supply

Frequency	60 Hz

Electrical characteristics

Losses (W)	Dielectric: < 0,2 W / kvar Total: < 0,4 W / kvar
Discharge resistance	50 V / 1 min (0,5 - 30 kvar) 75 V / 3 min (33 - 50 kvar)
Surge	10 % 8h in 24 h 15 % up to 30 min in 24 hours 20 % up to 5 min in 24 hours 30 % up to 1 min in 24 hours
Tolerance C	-5 ... +10 %
Maximum phase current	400 x In
Maximum transient current	1,8 In
Voltage	600 V
Insulation voltage, circuit	3 / 8 kV

Mechanical characteristics

Size (mm) width x height x depth	85 x 276 x 85 (mm)
Envelope	Aluminum
Thermal management	Natural or forced depending on the cabinet
Fastening	M12 fastening screws earth conductor
Weight (kg)	1,5

Environmental characteristics

Relative humidity (without condensation)	95%
Installation, location, position.	Vertical / Horizontal. Minimum distance between condensers 2 cm.
Working temperature	Tª class D: Daily average: 45 °C, annual average: 35 °C, maximum: 65 °C, minimum: -50 °C

Standards

Certifications	VDE 560
Electrical safety, Maximum height (m)	4000
Standards	IEC 60831-1-1/2

Protection

Circuit breaker type	Dielectric regeneration Expansion system

CLZ-FP HD 60Hz

Three-phase tubular power capacitor (Heavy Duty range)

CODE	TYPE	kvar (230 V)	kvar (240 V)	Use voltage (V)	kvar (400 V)	kvar (440 V)	kvar (460 V)	kvar (480 V)	kvar (525 V)	kvar (600 V)	kvar (660 V)	kvar (690 V)

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



CLZ-FP-60/12,5-60Hz-HD

Code: R2H68B.

CODE	TYPE	kvar (230 V)	kvar (240 V)	Use voltage (V)	kvar (400 V)	kvar (440 V)	kvar (460 V)	kvar (480 V)	kvar (525 V)	kvar (600 V)	kvar (660 V)	kvar (690 V)
Faston terminal, Un = 3 x 240 V / 60 Hz												
R2H622.	CLZ-FPT-24/2,5-60Hz-HD	2,3	2,5	240								
Terminal block, Un = 3 x 240 V / 60 Hz												
R2H626.	CLZ-FP-24/5-60Hz-HD	4,6	5	240								
R2H627.	CLZ-FP-24/6,25-60Hz-HD	5,75	6,25	240								
R2H628.	CLZ-FP-24/7,5-60Hz-HD	6,9	7,5	240								
R2H62B.	CLZ-FP-24/10-60Hz-HD	9,2	10	240								
R2H62D.	CLZ-FP-24/12,5-60Hz-HD	11,5	12,5	240								
R2H62E.	CLZ-FP-24/15-60Hz-HD	13,8	15	240								
Faston terminal, Un = 3 x 440 V / 60 Hz												
R2H641.	CLZ-FPT-44/1,25-60Hz-HD			400 | 440	1	1,25						
R2H642.	CLZ-FPT-44/2,5-60Hz-HD			400 | 440	2,1	2,5						
R2H646.	CLZ-FPT-44/5-60Hz-HD			400 | 440	4,15	5						
Terminal block, Un = 3 x 440 V / 60 Hz												
R2H647.	CLZ-FP-44/6,25-60Hz-HD			400 | 440	5,2	6,25						
R2H648.	CLZ-FP-44/7,5-60Hz-HD			400 | 440	6,2	7,5						
R2H64B.	CLZ-FP-44/10-60Hz-HD			400 | 440	8,3	10						
R2H64D.	CLZ-FP-44/12,5-60Hz-HD			400 | 440	10,3	12,5						
R2H64E.	CLZ-FP-44/15-60Hz-HD			400 | 440	12,4	15						
R2H64J.	CLZ-FP-44/20-60Hz-HD			400 | 440	16,5	20						
R2H64L.	CLZ-FP-44/25-60Hz-HD			400 | 440	20,7	25						
R2H64N.	CLZ-FP-44/30-60Hz-HD			400 | 440	24,8	30						
R2H64R.	CLZ-FP-44/40-60Hz-HD			400 | 440	33,1	40						
R2H64S.	CLZ-FP-44/50-60Hz-HD			400 | 440	41,3	50						
Faston terminal, Un = 3 x 480 V / 60 Hz												
R2H762.	CLZ-FPT-48/2,5-60Hz-HD			480			2,3	2,5				
R2H766.	CLZ-FPT-48/5-60Hz-HD			480			4,6	5				
R2H767.	CLZ-FPT-48/6,25-60Hz-HD			480			5,75	6,25				
R2H768.	CLZ-FPT-48/7,5-60Hz-HD			480			6,9	7,5				
Terminal block, Un = 3 x 480 V / 60 Hz												
R2H66B.	CLZ-FP-48/10-60Hz-HD			480			9,2	10				
R2H66D.	CLZ-FP-48/12,5-60Hz-HD			480			11,5	12,5				
R2H66E.	CLZ-FP-48/15-60Hz-HD			480			13,8	15				
R2H66J.	CLZ-FP-48/20-60Hz-HD			480			18,4	20				
R2H66L.	CLZ-FP-48/25-60Hz-HD			480			23	25				
R2H66N.	CLZ-FP-48/30-60Hz-HD			480			27,6	30				
R2H66R.	CLZ-FP-48/40-60Hz-HD			480			36,75	40				
R2H66S.	CLZ-FP-48/50-60Hz-HD			480			46	50				
Faston terminal, Un = 3 x 525 V / 60 Hz												
R2H772.	CLZ-FPT-52/2,5-60Hz-HD			525				2,1	2,5			
R2H776.	CLZ-FPT-52/5-60Hz-HD			525				4,2	5			
R2H778.	CLZ-FPT-52/7,5-60Hz-HD			525				6,25	7,5			
Terminal block, Un = 3 x 525 V / 60 Hz												



CLZ-FP-60/12,5-60Hz-HD

Code: R2H68B.

CODE	TYPE	kvar (230 V)	kvar (240 V)	Use voltage (V)	kvar (400 V)	kvar (440 V)	kvar (460 V)	kvar (480 V)	kvar (525 V)	kvar (600 V)	kvar (660 V)	kvar (690 V)
R2H67A.	CLZ-FP-52/8,5-60Hz-HD			525				7,1	8,5			
R2H67B.	CLZ-FP-52/10-60Hz-HD			525				8,4	10			
R2H67C.	CLZ-FP-52/11,5-60Hz-HD			525				9,6	11,5			
R2H67D.	CLZ-FP-52/12,5-60Hz-HD			525				10,5	12,5			
R2H67E.	CLZ-FP-52/15-60Hz-HD			525				12,5	15			
R2H67I.	CLZ-FP-52/17-60Hz-HD			525				14,2	17			
R2H67J.	CLZ-FP-52/20-60Hz-HD			525				16,7	20			
R2H67K.	CLZ-FP-52/22,5-60Hz-HD			525				18,8	22,5			
R2H67L.	CLZ-FP-52/25-60Hz-HD			525				20,9	25			
R2H67N.	CLZ-FP-52/30-60Hz-HD			525				25	30			
R2H67P.	CLZ-FP-52/34-60Hz-HD			525				28,4	34			
R2H67R.	CLZ-FP-52/40-60Hz-HD			525				33,4	40			
Faston terminal, Un = 3 x 600 V / 60 Hz												
R2H788.	CLZ-FPT-60/7,5-60Hz-HD			600						7,5		
Terminal block, Un = 3 x 600 V / 60 Hz												
R2H68A.	CLZ-FP-60/10-60Hz-HD			600						10		
R2H68E.	CLZ-FP-60/15-60Hz-HD			600						15		
R2H68I.	CLZ-FP-60/17,5-60Hz-HD			600						17,5		
R2H68J.	CLZ-FP-60/20-60Hz-HD			600						20		
R2H68K.	CLZ-FP-60/21-60Hz-HD			600						21		
R2H68L.	CLZ-FP-60/25-60Hz-HD			600						25		
R2H68N.	CLZ-FP-60/30-60Hz-HD			600						30		
R2H68P.	CLZ-FP-60/34,5-60Hz-HD			600						34,5		
Faston terminal, Un = 3 x 690 V / 60 Hz												
R2H796.	CLZ-FPT-69/5-60Hz-HD			690							4,6	5
Terminal block, Un = 3 x 690 V / 60 Hz												
R2H69B.	CLZ-FP-69/10-60Hz-HD			690							9,15	10
R2H69D.	CLZ-FP-69/12,5-60Hz-HD			690							11,4	12,5
R2H69E.	CLZ-FP-69/15-60Hz-HD			690							13,7	15
R2H69J.	CLZ-FP-69/20-60Hz-HD			690							18,3	20
R2H69L.	CLZ-FP-69/25-60Hz-HD			690							22,9	25
R2H69N.	CLZ-FP-69/30-60Hz-HD			690							27,5	30
R2H69R.	CLZ-FP-69/40-60Hz-HD			690							36,6	40
R2H69S.	CLZ-FP-69/50-60Hz-HD			690							45,75	50


All models are of the inert gas type, except for those with a 63.5 mm diameter and 136x355 mm size The dimensions (dxh) are shown for the tube only. Please consult the dimensions drawing at the end of this section for more information about the actual dimensions Terminal: maximum cross-section of type A cables: 16 mm2, type B: 25 mm2, type C: 35 mm2, F: Faston 6.3x0.8 mm and 12 A maximum current




CLZ-FP-60/12,5-60Hz-HD

Code: R2H68B.

Dimensions

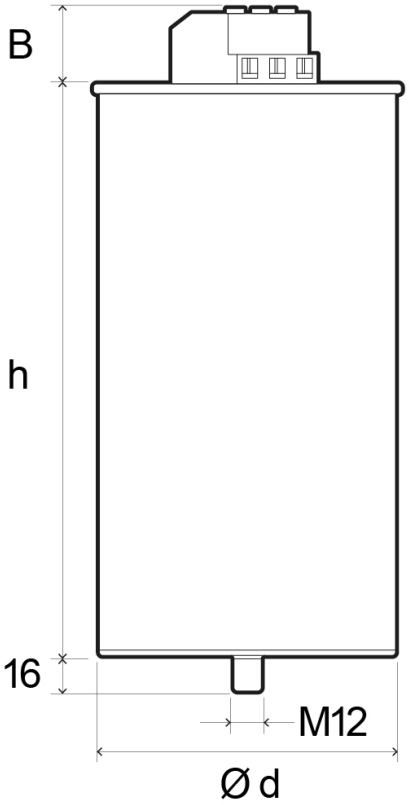

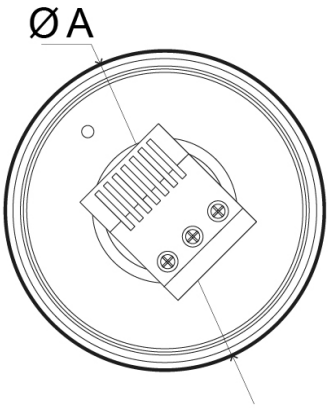

mm	d Ø	h	B	A Ø
85x175	85	175	31	90
85x245	85	245	31	90
100x245	100	245	31	105
116x245	116	245	35	121
136x220	136	220	35	141
136x261	136	261	35	141
136x355	136	355	46	141