

## FB3T-5-32-21

FB3T-5-32-21, Filter

Code: R78125. (CONSULTAR DISPONIBILIDAD)

- > System: Three-phase + Neutral
- > Frequency (Hz): 50
- > Max.neutral current: 32

### Description

FB3 filters block 3rd order harmonics and have been designed to reduce these harmonics in installations with distorting singlephase loads.

### Application

For single-phase loads, such as PCs, TFT screens, projectors, etc.



## FB3T-5-32-21

Third harmonic blocking filter

Code: R78125.

### Specifications

#### AC power supply

Frequency	50 Hz
Nominal voltage	Hasta 750 Vca

#### Mechanical characteristics

Size (mm) width x height x depth	370 x 280 x 300 (mm)
Weight (kg)	17

#### Environmental characteristics

Protection class	IP 21 (UNE-EN 60529)
Relative humidity (without condensation)	95%
Working temperature	-10 ... +50 °C

#### Electrical characteristics

Maximum transient current	1,5 (1 min every 10 min)
---------------------------	--------------------------






## FB3T-5-32-21

Third harmonic blocking filter

Code: R78125.

### Dimensions

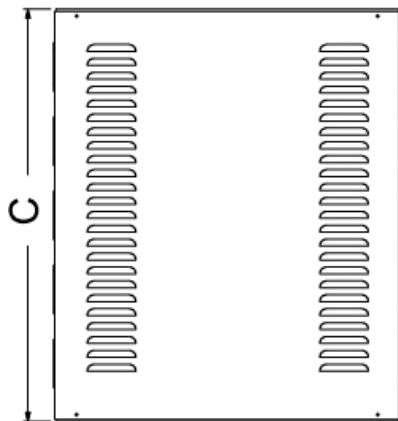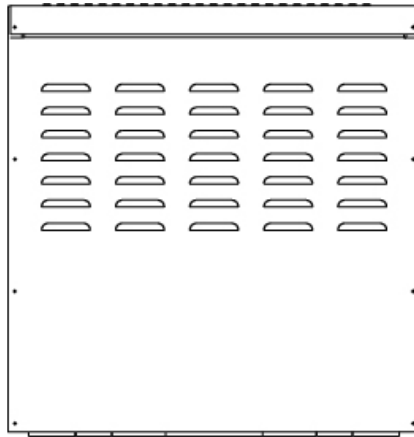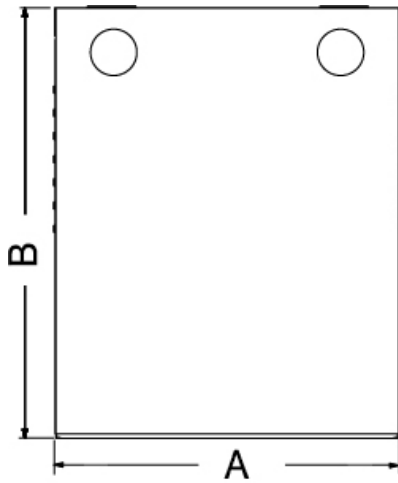

Type	A	B	C
FB3T-16	300	200	200
FB3T-50	370	280	300
FB3T-63	370	480	370
FB3T-100	650	1060	470