



eHome Link T2C32, Car park wall box

Code: V25330. CONSULTAR DISPONIBILIDAD

> Output type: 230 Vac - 32 A - 7,4 kW

> Input current: 32 A

> Connector type: Type 2 cable > Grid type: Single-phase

> Charge mode: 3 > No. Sockets: 1

> Earth leakage protection: 6 mAdc

#### Description

Designed to be easily installed in both indoor and outdoor private parking spaces, and to be distributed to electric vehicle manufacturers. The eHome range has been optimised to offer the best cost/quality ratio on the market. As a result, we offer a high quality product that can comfortably charge all the electrical vehicle brands on the market in Mode 3 with a Type 1 or Type 2 connector.

Thanks to its compatibility with the CirBEON-63 device, which manages the current supplied to the vehicle based to the power available, the **eHome** charger is ideal for the domestic sector.

#### Application

Its application focuses on home use, since it is easy to install and comes in a small size.







Basic charging wallbox

Code: V25330.

### Specifications

AC power supply	
Input intensity	32A
Frequency	50 / 60 Hz
Type of network	1Ph + N + GND
Nominal voltage	230 V ~ (± 10 %)
Electrical characteristics	
Cable: Connector type	Type 2 cable
Max. output intensity (A)	32
Charging mode	Mode 3
No. of charges	1
Max. output power (kW)	7,4
Voltage	230 V ~ (± 10 %)
Mechanical characteristics	
Size (mm) width x height x depth	180 x 315 x 115 (mm)
Envelope	Self-extinguishing ABS-PCVO plastic
Fastening	Wall mounting, 3-point wall anchorage
Weight (kg)	4
Environmental characteristics	
Protection class	IP 54
Relative humidity (without condensation)	100%
Working temperature	-30°C +50°C
User interface	
LED	Charge indicator
Standards	
Standards	IEC 61851-1, IEC 61851-21-2, IEC 62196-1, IEC 62196-2, Directiva 2014/35/UE, LVD; 2014/30/UE, EMC
Features / performance	
Optional	Protection shutter Max. Current controler (CirBEON)
Protection	
Element	DC 6 mA leakage detector Overvoltage detector Overtemperature
Output 1	







Basic charging wallbox

Code: V25330.

Maximum current	32 A
Maximum power	7,4 kW
Voltage range	230 Vca
Connector type	Type 2 cable
Network type	Single-phase (AC)

End-of-charge light, Compatible only with CirBEON-63 sensor, Weight: 4 kg, ABS-PCV0 self-extinguishing plastic housing - IP54 - IK10, Dimensions 315x180x115 mm. 5-m cable length, cable holder included (depending on model).









Basic charging wallbox

Code: V25330.

Dimensions Connections

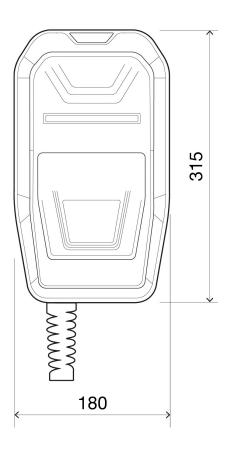

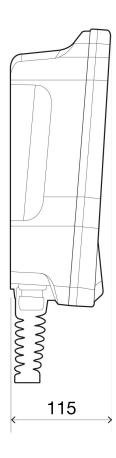

Single-Phase Charge Point Connect to the 230V ~.

