,

Code:

Description

With a modern and minimalist design, the new eNext Elite range offers the best indoor charging option. The Elite series complies with the highest standards of performance on the market and offers remote management and monitoring and integration into management platforms based on the OCPP 1.6J protocol.

Application

These devices are specially designed to be installed in covered parking spaces that can be used to park vehicles of any type (cars, motorcycles, bicycles, transportation, cleaning, etc.), where the ability to manage power or users is required.

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Code:

Specifications

AC power supply

Input intensity	32A
Frequency	50 ... 60 Hz
Type of network	1Ph + N + GND
Nominal voltage	230 V ~ (± 10 %)

Electrical characteristics

Cable: Connector type	Type 2 cable
Max. output intensity (A)	32
Charging mode	Mode 3 (according to IEC 61851-1)
No. of charges	1
Max. output power (kW)	7,4
Voltage	230 V ~ (± 10 %)

Mechanical characteristics

Size (mm) width x height x depth	335 x 315 x 179.7 (mm)
Envelope	Self-extinguishing ABS / PC
Fastening	Vertical, 3 points for wall mounting
Weight (kg)	5

Environmental characteristics

Protection class	IP 54 / IK10
Relative humidity (without condensation)	5 ... 95 %
Storage temperature	-40 ... +60 °C
Working temperature	-5 ... +45 °C

Communication Network

Protocol	OCPP 1.6J
Technology / Interface	Ethernet 10/100 Base TX (TCP/IP)

User interface

LED	RGB color charge indicator

Standards

Standards	IEC 61851-1, IEC 61851-21-2, IEC 62196-1, IEC 62196-2, 2014/35/UE, LVD 2014/30/UE, CEM, ISO 14443A/B (RFID), CE/RED (modem 4G)

Features / performance

Heating and air conditioning unit	-30 ... +45 °C (Optional)

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Code:

Wireless communication

Band	2,4 GHz
Technology / Type	Wi-FI


3.5" colour screen, compatible with CirBEON sensor, integrated MID-certified energy measurement, RFID reader for authentication and charge activation - ISO 14443 A/B, data storage, Ethernet and Wi-Fi communications, 4G communications (optional), OCPP 1.5/1.6 communications protocol, weight: 4 kg, ABS/PC enclosure - IP54 - IK10, Dimensions 180x335x315 mm. 5-m cable length, cable holder included (depending on model).

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



Code:

Dimensions

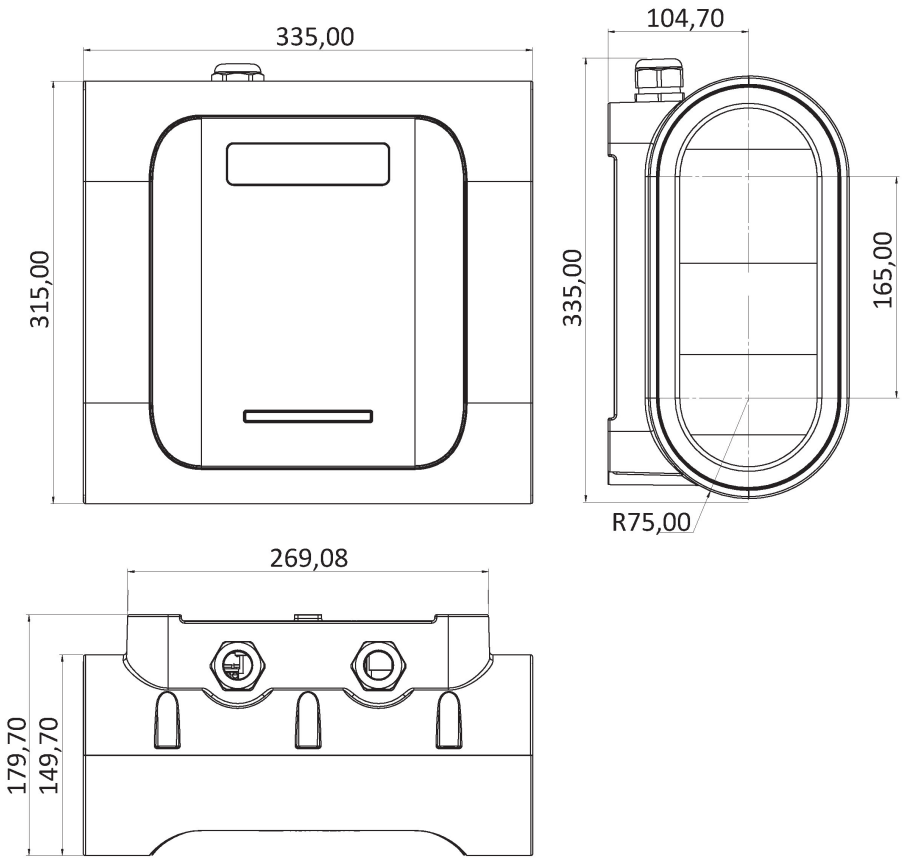

Creation date: 01/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.