



EZC96 .../5A

EZC96 .../5A, Ampèremètre pour mesure en courant alternatif 240° , fer mobile, panneau 96x96

Code: M10930. DESCATALOGADO

> Échelle: 240°, P2 > Précision: 1,5

> Rang mesure (A): .../5 A

> Modules: 96x96

Spécifications

| Panneau 0,144 Panneau: IP 52 (avant), IP 00 (bornes) -25+40 °C +10 +30 °C | | | |
|---|--|--|--|
| Panneau : IP 52 (avant), IP 00 (bornes) -25+40 °C | | | |
| -25+40 °C | | | |
| -25+40 °C | | | |
| | | | |
| +10 +30 °C | | | |
| | | | |
| | | | |
| CE | | | |
| 2000 | | | |
| BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318 | | | |
| | | | |
| 0,3 1,5 VA | | | |
| 20100 Hz | | | |
| 1,2 In permanent / 5 In pendant 30s / 10 In pendant 5s / 40 In pendant 1s | | | |
| | | | |
| 2 KV, 50 HZ <1 min entre mecanismo y caja | | | |
| | | | |
| | | | |
| 1 | | | |

Échelles interchangeables Voir page suivante Indiquer relation de transformateurs








EZC96 .../5A

Code: M10930.

Dimensions

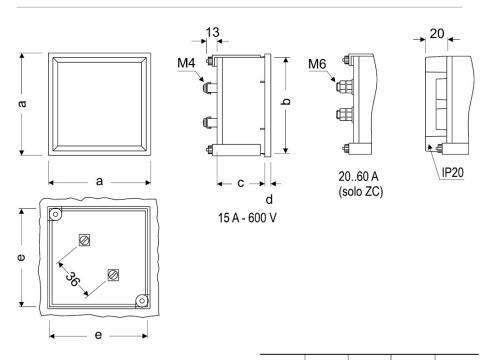

| Туре | Fig. ZC | Fig. EZC | а | b | С | d | е |
|------|---------|----------|-----|------|------|-----|-----|
| 48 | 1 | - | 48 | 44,7 | 61 | 5,2 | 45 |
| 72 | 1 | 1 | 72 | 67,2 | 43,5 | 5,7 | 68 |
| 96 | 1 | 1 | 96 | 91 | 43,5 | 5,7 | 92 |
| 144 | 1 | - | 144 | 137 | 64,5 | 7,3 | 138 |

