



## CMBUS-8

CMBUS-8, Convertisseur de M-Bus à Modbus,

Code: M540A0.

### La description

**CMBUS** protocol transducers enable devices with RS-485 Modbus Master communications to communicate with different M-BUS slave units.

There are two unit models:

- The **CMBUS-8** model can communicate with 8 slave units (100 parameters).
- The **CMBUS-24** model can communicate with 24 slave units (500 parameters)

### Application

In Northern and Central European installations there are many devices that log consumption, equipped with **M-BUS** communications protocols or interfaces. These equipments measure cold and hot water consumption, as well steam, gas, electricity, etc. Said equipments deliver characteristic parameters of the systems they control, such as, water temperature, volume, flow, pressure or electrical energy consumption, as well as the more basic parameters of an electrical network.

The **M-BUS** (BUS-Meter) protocol is a communications system for reading energy meters that has been designed to automate data collection by remote control or computer programs.



## CMBUS-8

Convertisseur de M-Bus à Modbus

Code: M540A0.

### Spécifications

#### Alimentation en courant continu

Consommation	55 mA
Tension nominale	18 ... 30 Vcc

#### Caractéristiques mécaniques

Taille (mm) larg. x haut. x prof.	17,5 x 90 x 58 (mm)
Poids (kg)	0,065

#### CMBUS

Convertisseur de M-Bus à Modbus

CODE	TYPE	Description
<b>M-BUS</b>		
M540A0.	CMBUS-8	Convertisseur de M-Bus à Modbus, jusqu'à 8 esclaves Mbus
M540B0.	CMBUS-24	Convertisseur de M-Bus à Modbus, jusqu'à 24 esclaves Mbus




## CMBUS-8

Convertisseur de M-Bus à Modbus

Code: M540A0.

### Dimensions

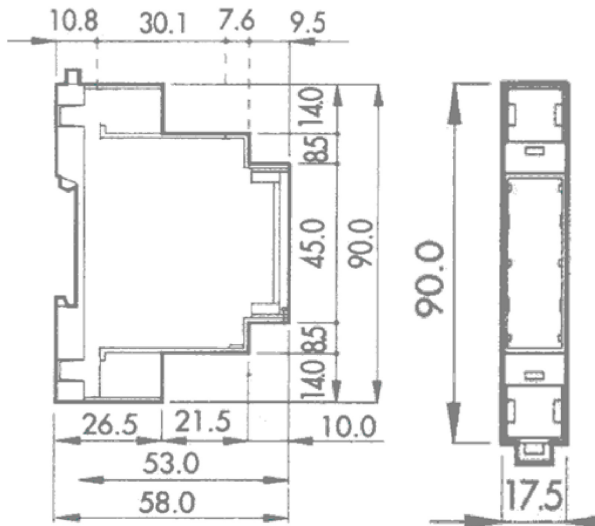

### Connexions

